

# TCL

## **TAMV6** *Pro* **Intelligent VRF**

Full-DC inverter Central air conditioning system



Powerful



High efficiency



Comfortable



Intelligent



Stable



Convenient





# CONTENTS

## 04 Company Profile

## 10 Powerful cooling & heating

- DC inverter compressor\*
- Double C high efficiency condenser
- DC inverter fan motor
- High efficiency axial fan
- 36°C Three-stage supercooling technology\*
- Air-cooled & refrigeration-cooled technology
- Intelligent inverter technology

## 18 High efficient energy-saving & environmental friendly

- APF
- IPLV
- ODU standby mode
- "2-1" loop design
- Stepless inverter technology
- RoHS certification
- High energy-efficient compressor
- R410A refrigerant
- Variable evaporating /condensing temperature adjustment technology

## 24 Comfortable & healthy environment

- Extreme fast cooling and heating
- Constant temperature
- Silent-mode
- Healthy air clean strainer
- Fresh air
- Comfortable soft wind
- Intelligent defrost technology
- Auto restart function

## 30 Intelligent-operation & maintenance control

- Non-polar CAN bus communication technology
- Multiple control solutions
- TCL CAC management system
- AHU connection kit
- BMS gateways

## 38 Stable & reliable performance

- Inverter module cooling protection technology
- Six levels oil return technology
- High precision refrigerant control technology
- -25°C ~ 56°C Ultra wide operating temperature range
- Pressure self-regulating technology
- Triple backup function
- Rotation function
- Multiple protections

## 48 Convenient Installation and Maintenance

- 15 basic modules, satisfy all kind of requirement
- Big-capacity module design
- Super long refrigerant pipeline design
- Auto-refrigerant detecting and auto-charging function
- Highest static pressure for outdoor unit
- Convenient for the transportation
- Auto-addressing function
- ODU without oil balance pipe, compact design
- Emergency power-off function
- Commissioning software

## 54 ODU lineup & parameters

## 62 MINI VRF

## 67 IDU lineup & parameters

- One-way cassette
- Two-way cassette
- Four-way cassette
- Low static pressure duct
- DC series slim duct
- Medium static pressure duct
- High static pressure duct
- Wall mounted
- Ceiling & floor
- Fresh air processing
- Energy recovery ventilation

## 80 Installation options

## 88 Projects

\* : Suitable for some models



# COMPANY PROFILE

## The Creative Life

TCL is the initials of The Creative Life, which means that creativity touches Life.



## Introduction Of TCL

TCL Corporation LTD, founded in 1981, is one of the largest consumer electronics conglomerates and operates on a global scale in China. At present, TCL has formed four industrial groups including multimedia, communication, China Star Optoelectronics Technology and TCL Home Appliances, and six business segments including System Science and Technology Business Headquarters, Tikeli Group, emerging Business Group, Investment Business Group, Hanlinhui Company and real estate. Its revenue exceeded 100 billion yuan for 5 consecutive years. The group's main industries establish R&D headquarters and 26 R & D institutions where in China, the United States, France, Singapore and other countries. It has nearly 22 manufacturing and processing bases in China, Poland, Mexico, Thailand, Vietnam and other countries.

TCL Corporation is committed to becoming a high-tech industrial group. In January 2004, TCL was listed in Shenzhen Stock Exchange (SZ000100). On April 16, 2019, the restructuring was officially completed. After the restructuring, TCL owns two listed companies: Hua Xian Optoelectronics (00334.HK) and Hanlinhui (835281). TCL Owns two listed companies: TCL Electronics (01070.HK) and Tonly Electronics Holdings Limited (01249.HK).

After nearly 40 years of development, TCL has become a leader in the internationalization process of Chinese enterprises by virtue of China's reform and opening-up and adhering to the enterprise spirit of dedication and innovation.

When COVID-19 broke out In January 2020, TCL immediately rushed to Hubei, donating cash, materials and Internet services that accumulative worth over 20 million yuan, and went to Leishenshan and other designated hospitals to install electrical equipment. In July, TCL Technology announced that it would become the final transferee of 100% equity of Tianjin Zhonghuan Group. TCL also carried out strategic layout in the three industrial sectors of semiconductor display, intelligent terminal, semiconductor and new energy. In August, TCL Technology announced the acquisition of 60 percent of Suzhou Samsung LCD Technology Co., LTD and 100 percent of Suzhou Samsung Display Co., LTD.

In 2021, TCL Corporation annual revenue was exceed 39.4 billion dollar, significant increase in net profit. In the same year TCL start up 'Xuri Plan' which invest more than 3.15 billion dollar to promote ecological leadership and help industrial upgrading.

In the future, TCL will establish a perfect insight system that is close to consumers and run through the overall process of corporate activities, forming the driving force of TCL brand with product force, marketing force and experience force as the core, improving the overall brand image to the direction of "young, fashionable and international", and further strengthening innovation and consumption experience.

## Introduction Of TCL CAC

GD TCL Intelligent Heating&Ventilating Equipment CO.,LTD. is a developmental company integrating R & D, manufacturing, sales and service of HVAC equipment. It has achieved the full coverage of unit type light commercial, small multi connected household central air conditioning, multi connected central air conditioning, air-cooled modular machine series, household dual supply series, air source heat pump hot air machine series, ultra-low temperature modular machine series, household air energy water heater series, commercial air energy hot water series and other products. It has 4 R & D departments and 20 laboratory groups. This year, TCL-HVAC's new base will be put into use. By then, the new and old bases will have 27 world-class production lines with an annual capacity of more than 2 million sets.

The test center of TCL-HVAC has been recognized by China National Accreditation Service for Conformity Assessment (CNAS), which lays a solid foundation for the improvement of independent R & D ability and laboratory management ability, as well as the establishment of a customer-centered, quality-oriented, product performance and product innovation improvement system.

With professional technology and service ability, and nearly 20 years of historical precipitation and market accumulation, TCL-HVAC has been fully verified in the market and gained a good reputation in the market.

TCL intelligent HVAC' s future can be expected!



TMM6

More powerful

**TCL** Full DC Inverter Intelligent VRF



Powerful



High Efficiency



Comfortable



Intelligent



Stable



Convenient





## POWERFUL COOLING AND HEATING

TMV6 full DC Inverter VRF system, use international famous compressor, DC motor, high-precision EXV and so on, thanks to all these high-technology, TMV6 has the best cooling and heating performance.



DC inverter  
compressor



Double C  
high efficiency condenser



DC inverter  
fan motor



High efficiency axial fan



36°C Three-stage  
supercooling technology\*



Air-cooled & refrigerant-cooled  
technology for main control board



Intelligent inverter technology







## 1.1 Full DC Inverter High Pressure Chamber Scroll Compressor

- TCLfull DC inverter compressor is built-in with brushless reluctance DC compressor control, DC fan motor, and upgraded heat exchanger, which is more efficient and energy-saving.



Less moving parts



Less moving parts



Fine processing



High efficiency



Less vibration



Long life

- 1 New scroll compressor**  
Faster suction and higher efficiency

- 2 High Pressure Shell**  
Thicker shells, robust welds and large venting volume reduces sound transmission, lowering overall sound level.


- 3 Aeronautical Material**  
Fix scroll is made of aeronautical material, which is light-weighted and durable for high pressure.

- PTFE Crankshaft**  
PTFE material is applied to reduce the friction and increase its stabilization.

- 5 High Polymer Material**  
PTFE material is applied to reduce the friction and increase its stabilization..

- 6 IBall Bearing**  
Additional ball bearing is applied to due with heavy duty.

- 7 Recycled Lube**  
Internal recycle is establish to reduce attenuation of heat and thus, increase the efficiency and stablization.

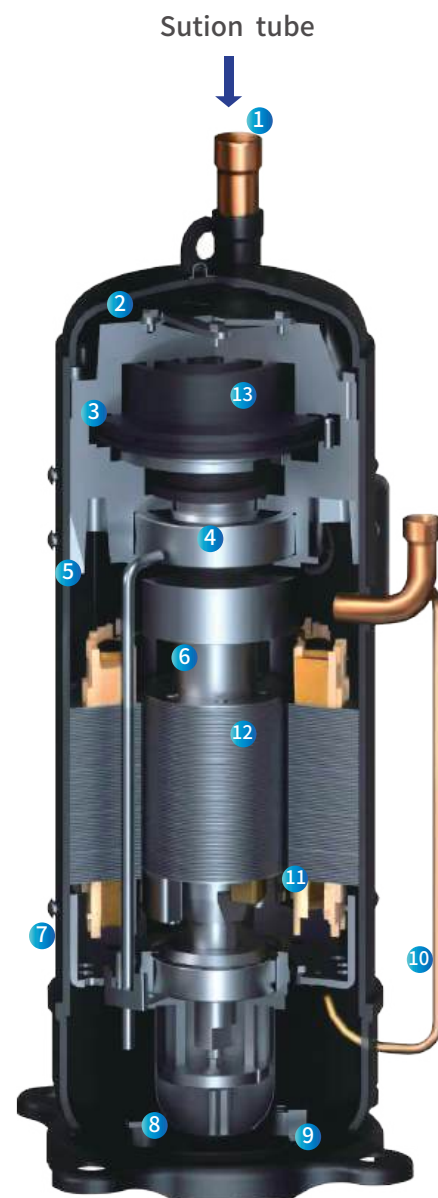

- 13 Tip Seal of PPS resin**  
Almost perfect sealing helps to reduce starting torque and efficiency during operation.

- 12 Permanent Magnet Synchronous DC Motor**  
NdFeB and optimized structure enable it to be high-efficient, low noise and wide frequency.

- 11 180° Sine Wave DC Inverter Driver**  
DC inverter is driven by the pure sine wave which largely increase its efficiency.

- 10 Active Oil Balancing**  
Patented active oil balancing technologies ensure the stabilization of usage of multi-connected compressor.


- 9 Self-cleaning Lube**  
Strong magnet absorb contamination in the lube and maintain its lubrication.

- 8 Ball Bearing**  
Additional ball bearing is applied to due with heavy duty.

## >> Asymmetric Vortices

- In view of the high pressure characteristics of R410A refrigerant, the compressor strengthens the bearing structure and adopts the design of asymmetric scroll disk, which has the following advantages over the symmetrical scroll disk:

- ✓ Reduce refrigerant leakage and improve efficiency;
- ✓ Two adjacent chambers have small pressure difference, small vibration and more mute;
- ✓ Prevent over compression, prolong the service life of the compressor.

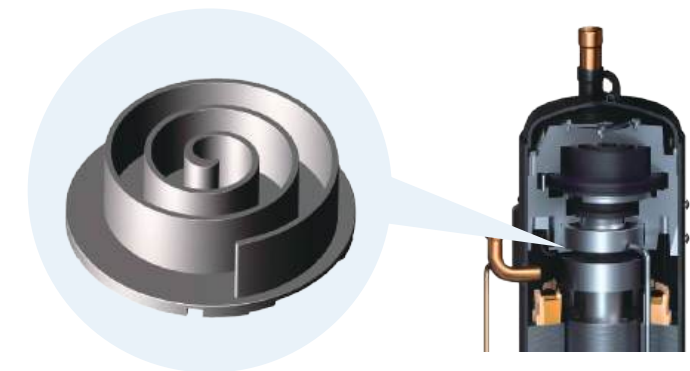

## >> Motor Rotor With Neodymium Magnetic Material

- Neodymium, an artificial permanent magnet, is one of the strongest magnetic materials to date. The magnetic force of neodymium magnet is 10 times that of common ferrite magnet. Under the same volume, the electromagnetic field intensity is stronger, the starting torque is larger, and the operation efficiency is higher.




Neodymium Magnets



Ferrite Magnet

## >> Large-displacement And ultra-wideband Operation Technology


- Displacement up to 98cc, far more than the ordinary compressor (displacement < 80cc), the operation frequency of 10RPs-140rps, far more than the ordinary compressor 20RPs-100rps, strong power, realizing fast refrigeration and heating.

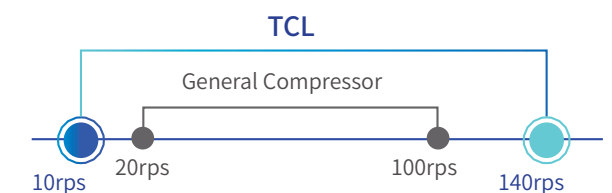



## 1.2 Double 'C' Type Heat Exchanger

- Double C-type compact super-large area heat exchanger, makes the heat exchange area larger, reduces the pressure loss of the heat exchanger, improves the efficiency of heat exchanger, and has higher efficiency when running under heavy load.

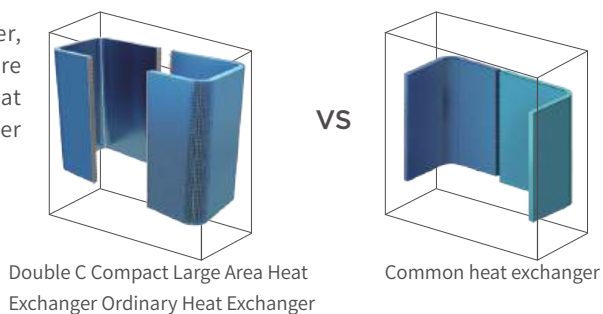


- The new structural design further improves the matching of system partial load and reduces the floor area of the whole machine.

**36HP occupies only 1.6055 m<sup>2</sup>, which is 21.4% less than the previous generation**




- Heat exchanger adopts the perfect combination of multi-coated hydrophilic aluminum foil heat exchange fins and high-efficiency internally threaded heat exchange copper tubes, which greatly improves the heat exchange efficiency and enhances the corrosion resistance and oxidation resistance of the heat exchanger.



Φ7 Heat Exchange Copper Tube

Multiple rows of small-diameter heat exchange tubes, the tube spacing is smaller, and the number of copper tubes used in the same length is more, which effectively increases the heat exchange area of the heat exchanger and improves the heat exchange efficiency of the heat exchanger



Hydrophilic aluminum fin

The condensed water will spread out quickly on the hydrophilic aluminum foil without condensing into water droplets, increasing the heat exchange area, speeding up the cooling and heating speed, and effectively avoiding the noise caused by the condensed water obstructing the air flow



Internally threaded copper tubes

The inner surface of the internally threaded copper pipe is designed with a groove, which increases the contact area with the refrigerant, so that the heat exchange performance and thermal conductivity of the heat exchanger are better

### Lubricating layer

Destroy the surface tension of water droplets, accelerate the downstream speed of condensed water or defrosting water, and improve the air conditioning capacity

### Hydrophilic coating

Ensure that the air conditioner is not easy to form frost when heating

### Corrosion resistant coating

Slow down the corrosion of corrosive gas to the heat exchanger

### fins


## 1.3 High Voltage (concentrated coil) DC Motor

- The outdoor unit fan motor adopts a high-voltage centralized winding DC motor, which has a more stable and reliable output, effectively reduces losses and improves operating efficiency.
- The outdoor unit fan adopts  $\phi 750\text{mm}$  super-size wind wheel, compared with ordinary air conditioner  $\phi 540\text{mm}$  dual fans, it has sufficient air volume, higher heat exchange efficiency and lower noise.



## 1.4 750mm Large Size Axial Flow Fan

- The fan is steplessly adjusted according to environmental conditions and air-conditioning load conditions, and is matched with the compressor's stepless frequency conversion technology, so that the system runs more stable and reliable.

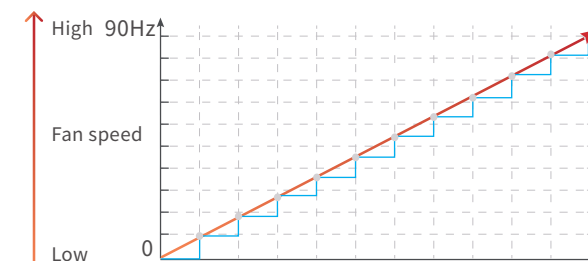

Stepless speed regulation Average speed

1. Accurately adjust the refrigerant pressure to improve the reliability of the unit;
2. The motor speed is adjusted quickly to better adapt to the rapid changes in air-conditioning load.

## 1.5 Intelligent Inverter

- The unit uses multiple sets of high-precision, high-efficiency and high-reliability intelligent inverters to control the compressor and fan motors, making the control more flexible, efficient and intelligent.

### Intelligent inverter

- 1) It can effectively reduce high-order harmonic components, motor vibration, torque fluctuation and noise;
- 2) It can ensure the smooth start of the compressor, reduce the starting current of the compressor, and reduce the impact on the power grid; increase the operating frequency range of the compressor;
- 3) Ultra-wide voltage operating range, stable operation within the three-phase 243V-460V voltage range;
- 4) It has multiple protection functions such as undervoltage, overvoltage, overcurrent, and overtemperature to ensure the efficient and reliable operation of the system.



## 1.6 Surrounding Refrigerant Cooling Technology

- The outdoor unit's inverter module is cooled by refrigerant to ensure that the inverter module can be effectively cooled in a high-temperature environment, reduce the working temperature of the frequency conversion module, and improve the reliability and service life of the electronic control system. It also prevents poor heat dissipation under extreme conditions, such as due to the periodic stop of the fan.

### Electric control system


Temperature drop

80° C

60° C

### Air cooling heat dissipation

Through the fan (fan) to strengthen the ventilation, strengthen the cooling effect, to maintain stable and reliable system operation.

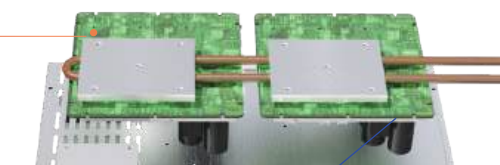

### Refrigerant radiator

The wraparound refrigerant radiator can stably and efficiently take away the heat in the frequency conversion module of outdoor unit, improve the electrical reliability of the unit when working in high temperature environment, and ensure stable and safe operation.

### The cooling plate



### Refrigerant pipe

The heat dissipation plate is fitted 360° tightly with the refrigerant tube, effectively reducing the contact thermal resistance between the copper tube and the heat dissipation plate, and the heat dissipation performance is superior.





## HIGH EFFICIENT ENERGY-SAVING AND ENVIRONMENTAL FRIENDLY

The global climate is facing severe challenges, in order to achieve the "dual carbon" goal, it has become an urgent issue for enterprises to control carbon emissions effectively, improve energy efficiency and reduce energy consumption. TCL CAC follows the product design concept of high efficiency, energy saving and low carbon, use high-quality components of efficient refrigeration and leading refrigerating technology, to achieve building air-conditioning systems. Integrate the goal of green, reliable and efficient energy management.

APF  
5.5

APF up to 5.5

IPLV  
10.0

IPLV 10.0



ODU standby  
mode



"2-1" loop design



Stepless inverter  
technology



RoHS certification




High energy-efficient  
compressor



R410A refrigerant



Variable evaporating/condensing temperature  
adjustment technology

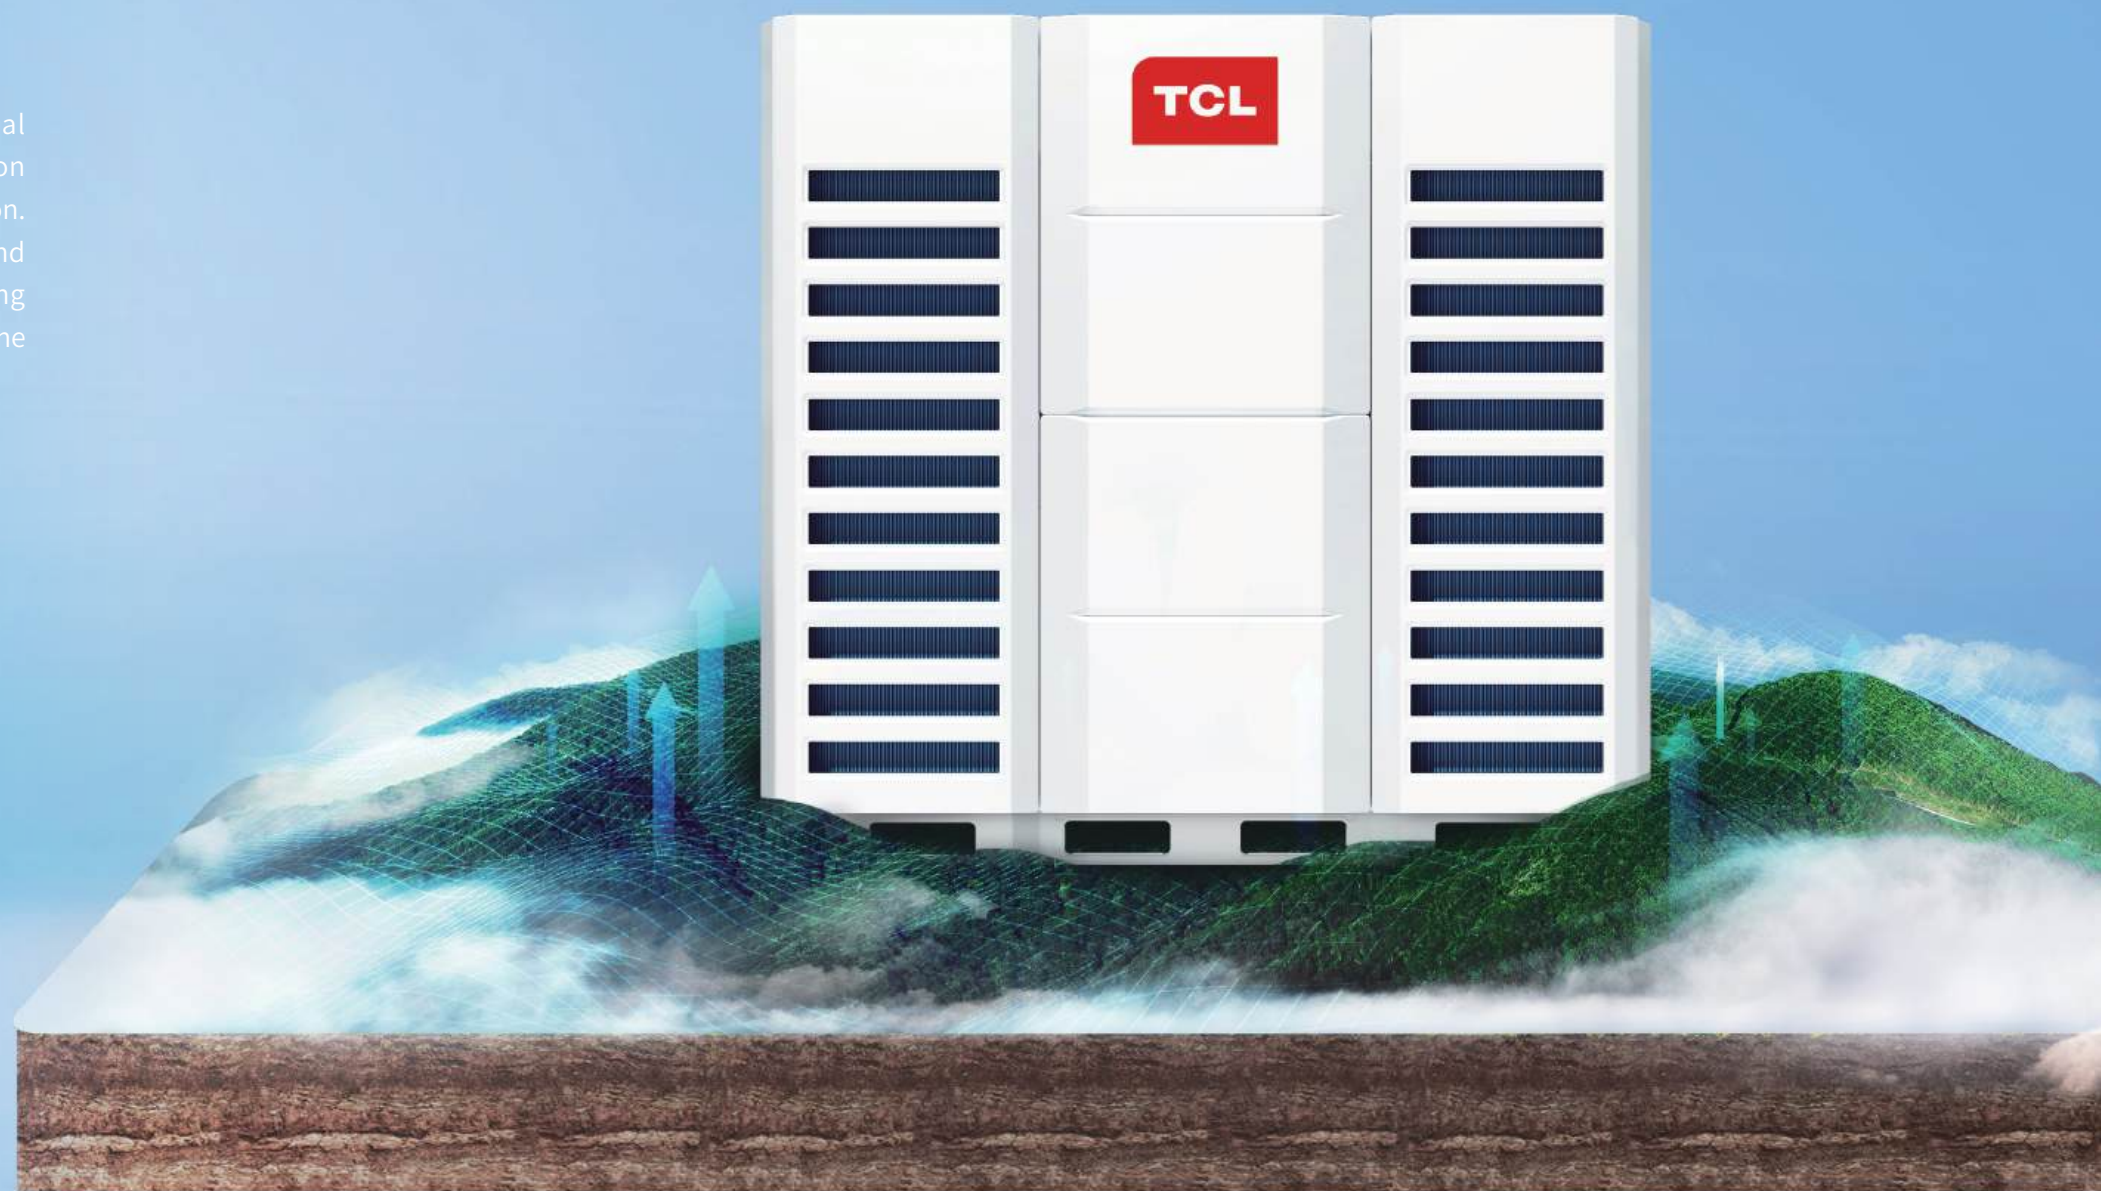






## 1.7 APF Up To 5.5

### Far exceeding the national first-level energy efficiency standard

TMV6 full DC inverter intelligent VRF product, its annual comprehensive energy efficiency ratio APF is up to 5.5, and all series exceed the new national standard first-level energy efficiency standard.

#### APF calculation formula


$$\text{APF} = \frac{\text{Total cooling season load} + \text{Total heating season load}}{\text{Total power consumption in cooling season} + \text{Total power consumption in heating season}}$$

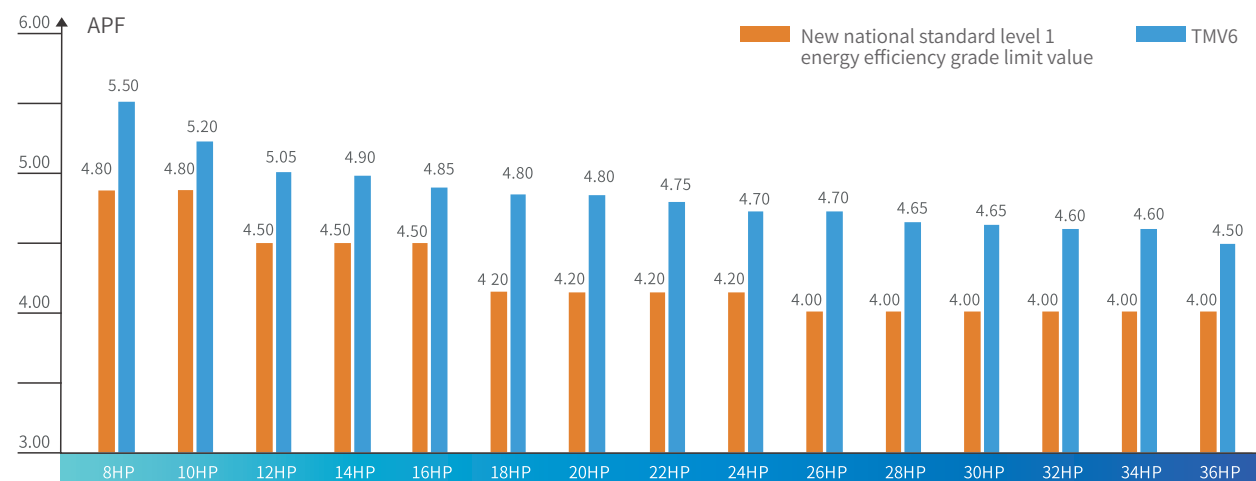

## 1.8 IPLV(C) Up To 10.0

### IPLV(C) up to 10.0, excellent energy saving effect.

IPLV(C) is the refrigerating comprehensive coefficient of performance, which is used to measure the part-load efficiency of VRF air conditioners in the cooling season. Since most of the time, only part of the air conditioner can be used in commercial places, IPLV(C) can reflect the energy-saving performance of central air conditioners in actual operation more accurately.

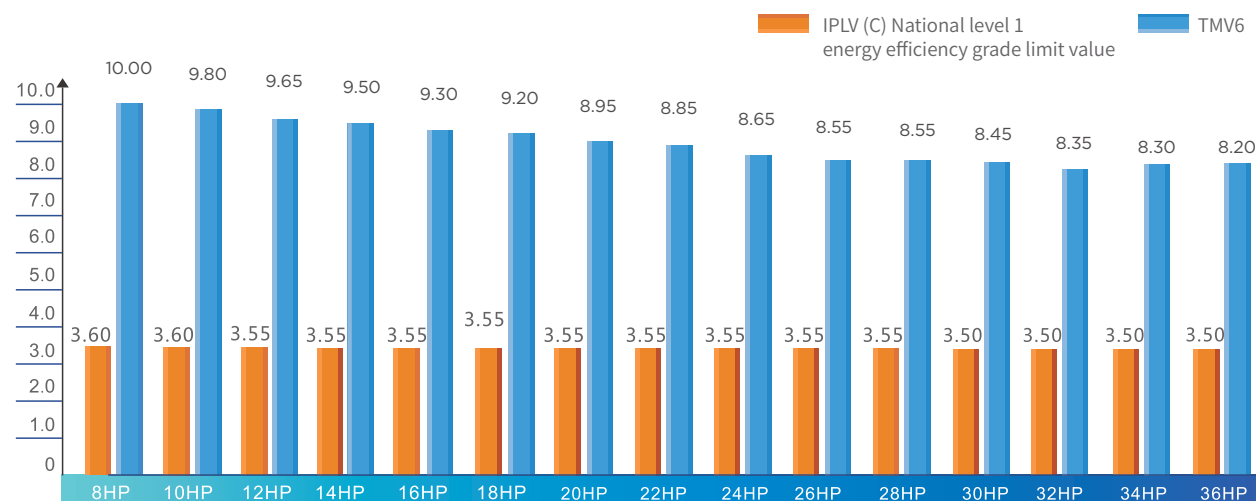

## 1.9 Authoritative Attestation

The TMV6 series full inverter VRF units, through the compressor core frequency conversion technology upgrade, the overall optimization of the refrigeration system and the control system, makes the unit energy-saving performance even better, and has passed the national first-level energy efficiency standard certification.



Certification Bodies' Scheme



Conformite Europeenne

## 2.0 DC inverter Scroll Compressor\*

The DC variable frequency compressor adopts an asymmetric scroll structure to effectively reduce the leakage loss of refrigerant gas during suction and inside the compression chamber, to improve the efficiency and reliability of compressor operation.



#### Optimized asymmetric vortex line

Using new type of asymmetric scroll profile can reduce leakage loss and ineffective suction overheating.

#### Concentrated winding motor

The coil height of the concentrated winding motor is reduced, the copper loss is less the efficiency is higher in the middle and low speed areas, and it is more suitable for APF conditions.

#### Suction directly


Small suction preheating, high volume efficiency

#### Intermediate pressure servo mechanism

The intermediate pressure is dynamically adjusted according to the operating pressure to achieve axial flexibility, optimize the orbiting and fixed scroll teeth, and improve product performance.

## 2.1 High Efficiency "2-1" Refrigerant Flow

Compared with gaseous refrigerant and liquid refrigerant, gas-liquid mixed phase refrigerant has higher heat exchange efficiency. This circuit can not only increase the amount of liquid refrigerant but also increase the flow rate of the refrigerant and increase the heat exchange efficiency.

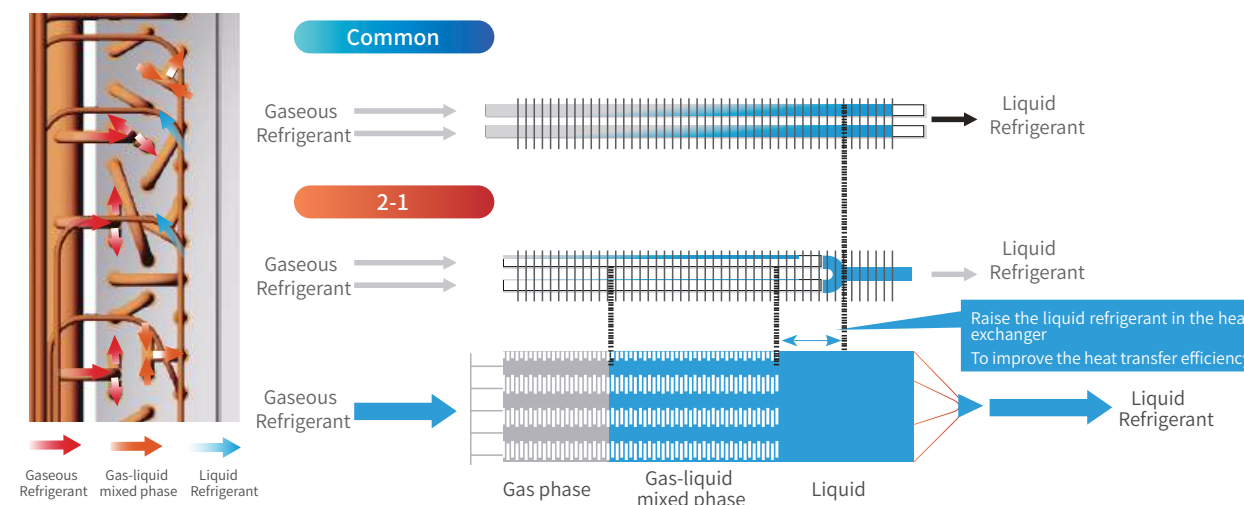






## 2.2 0 ~ 480Hz Stepless Frequency Adjustment




- The operating speed of the DC inverter compressor can be adjusted continuously and freely according to the change of the system capacity. The accuracy is higher, the stepless frequency conversion is realized, and the sub-adaptive control technology is combined, and the capacity output is automatically adjusted according to the actual control load to ensure a higher level of accuracy. Smooth change curve to meet higher demands for comfort. TCL's TMV6 can only use broadband compressors and powerful inverter control motherboards for multiple connections. The compressors operate at 0-480Hz broadband, which has more capacity and can better cope with various complex and harsh extreme conditions.

- The unit has industry-leading EER and Integrated Part Load Value IPLV (C)

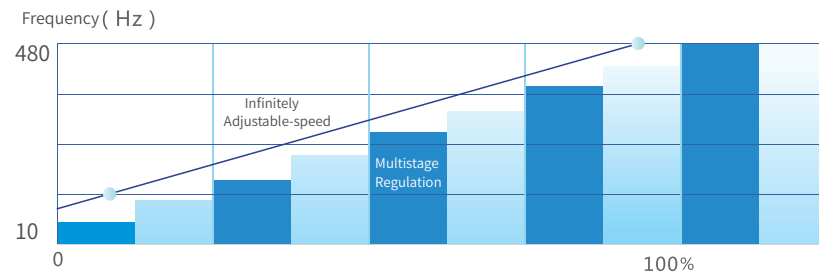

- The compressor adopts 180° sine wave vector drive technology, which can obtain an ideal smooth sine wave curve, so that the motor runs smoothly, the electric energy efficiency is higher, and the harsh sound is reduced.

- Vector control technology effectively suppresses high magnetic harmonic current and electromagnetic noise, and has passed the national EMC electromagnetic interference test

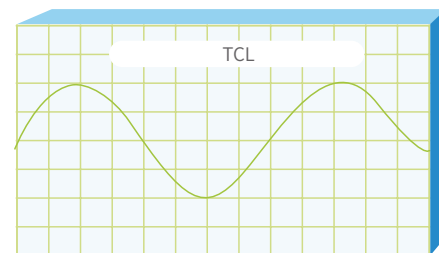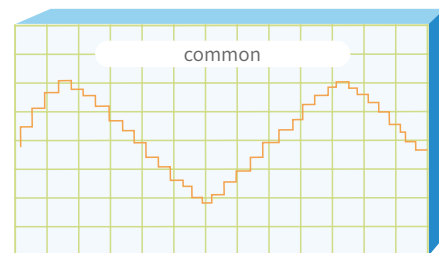

## 2.3 Four Seasons Energy-saving Mode

- Select the automatic energy-saving mode, the system optimizes output according to changes in ambient temperature, realizes automatic control of energy-saving in all seasons, and improves the overall energy efficiency of the unit's all-season operation.




## 2.4 ODU Standby Mode

- When there is no need for cooling and heating indoors, the control system issues a command to cut off the power supply of the outdoor heating and power devices of the electric control module. The standby power of the outdoor unit is as low, which is low-consumption and energy-saving.



## 2.5 Variable Evaporating/condensing Temperature Regulation Technology

- The self-adaptive adjustment of evaporating and condensing temperature can ensure that when the air conditioner is running, the refrigerant flow can be accurately controlled according to the demand, and the evaporating/condensing temperature can be automatically adjusted to reduce temperature fluctuation, to achieve the effect of energy saving and constant temperature.

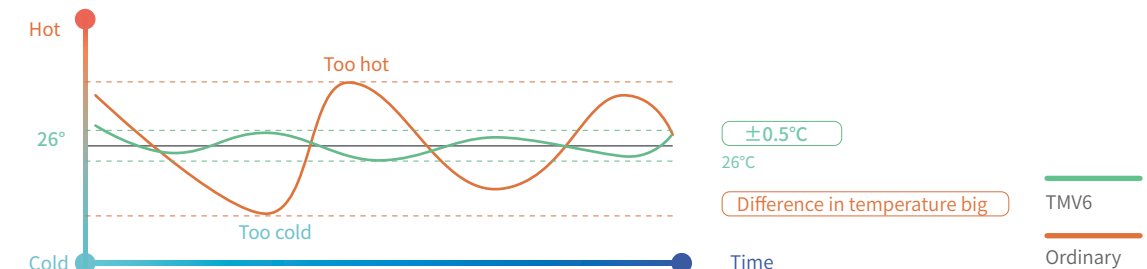

## 2.6 Multi-priority Modes, VIP Priority Service

- The TMV6 system can be set with a variety of operating modes, cooling only/heating only/cooling priority/heating priority/VIP priority/first opening priority to prevent mode conflict.



Response only  
cooling



Respond only  
heating



Cooling priority



Heating priority



VIP priority

## 2.7 R410A High-efficiency Environmentally Friendly Refrigerant

- R410A is an HFC refrigerant that does not damage the ozone layer. Using R410A can increase the COP and protect the ozone layer. It is an efficient and environmental-friendly refrigerant.
- R410A is non-toxic and is a "non-flammable refrigerant".



## 2.8 RoHS Certification

- TMV6 full inverter VRF unit is highly efficient and environmentally friendly. Seiko builds global quality and has passed EU RoHS certification.







# COMFORTABLE AND HEALTHY ENVIRONMENT

People's demand for a healthy air environment is constantly escalating. The improvement of air quality in buildings is more and more important. TCL intelligent VRF has been seeking technical innovation to provide people with a comfortable and clean, healthy air environment to build people's high-quality life.

Extreme fast  
cooling and heating

Silent-mode

Fresh air

Intelligent defrost  
technology

Constant  
temperature

Comfortable  
soft wind

Auto restart  
function








## 2.9 Fast Cooling And Heating

- TCL VRF adopts a large-capacity DC inverter compressor which can start the unit quickly and achieve a super cooling and heating capacity output, to provide a comfortable room environment.

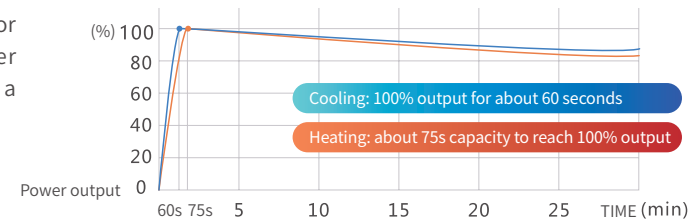

## 3.0 Constant Temperature

- Multiple sensors detect the real time temperature of the system to make sure the indoor temperature fluctuation within  $\pm 0.5^{\circ}\text{C}$ .

### Multi-electronic Expansion Valves

- The outdoor unit has multiple electronic expansion valves with a control accuracy up to 3000 level, which can adjust the refrigerant circulation and control the compressor overheat accurately to get a precise temperature control.



Electronic expansion valve

High control accuracy  
3000 Level

### High-precision temperature sensor

- Can detect accurate temperature with precision  $0.5^{\circ}\text{C}$




### Dual pressure sensors

- High precision and sensitivity can detect the temperature fluctuation quickly and accurately.



### Refrigerant liquid by-pass technology


- This technology is mainly used to increase the refrigerant flow and improve the cooling effect when the indoor side refrigerant flow is insufficient.

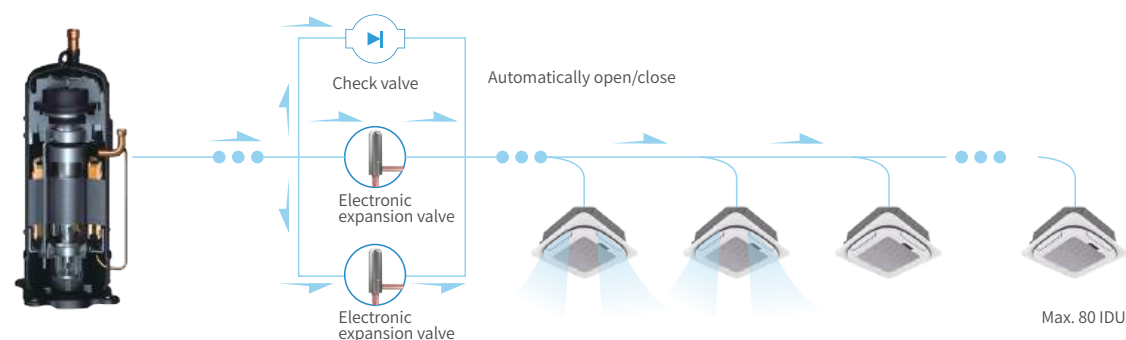

## 3.1 Multiple Silence Technology


### 13 Items of silent improvements

The structure of each component is involved in optimized airflow analysis, which can not only operate with low noise, but also ensure the air volume and operation effect of the outdoor unit.

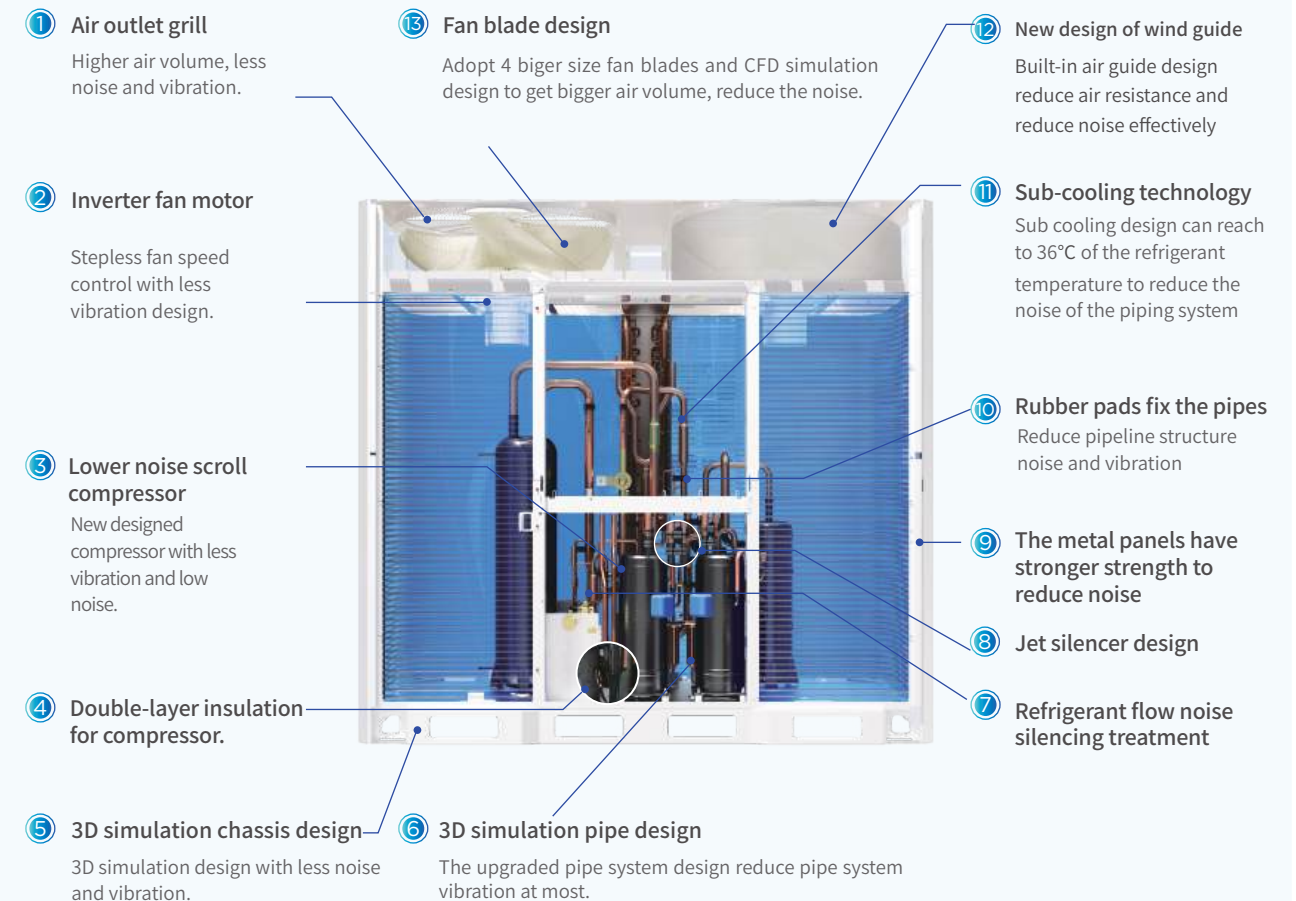


### Night silent mode

- The ODU can automatically check the highest ambient temperature and record the time, then to start the silent operation mode after 8 hours, system returns to the normal mode after running for 10 hours. To make the ODU running noise to as low as 45dB(A).

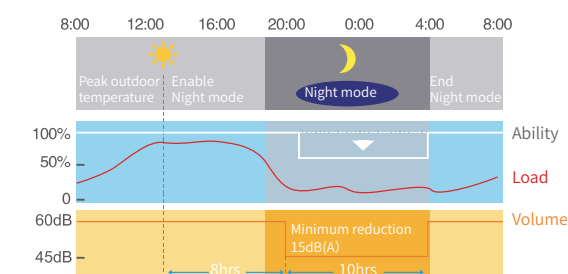

### Super silent mode

- In this mode, the running noise of the system will be reduced to be 40dB(A).

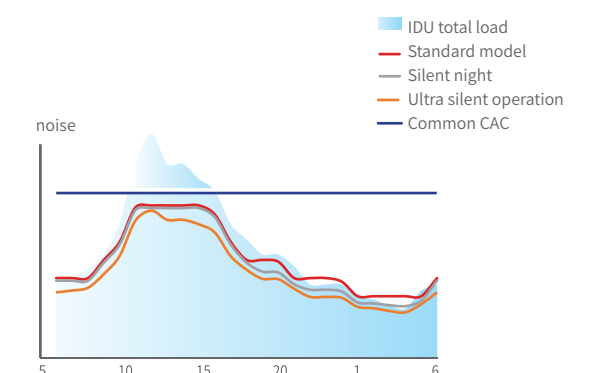





### 3.2 Fresh Air Solution

- TCL VRF can supply the multiple fresh air solutions such as fresh air processing units , ERV and air handing units etc.



### 3.3 Comfortable Soft Wind Panel

- The upgraded panels have a beautiful apperance and provide comfortable air supply .



### 3.4 Intelligent Auto-restart Function

- When a sudden power failure occurs, system will automatically store the state of the machine before the power failure. When the machine is restarted, the system will automatically restart with the settings before the power failure (operation mode, set temperature, fan speed, etc).


Note: This function can also start manually



### 3.5 Intelligent Defrost Technology

- The system can automatically decide the time to defrost according to the operation data and heating capacity.
- Under high humidity condition, the system will defrost in advance to keep the room comfortable.
- During defrosting, the system will close the indoor to avoid the cold air .

Common defrost




TCL Intelligent defrost




Common defrost

Intelligent defrost

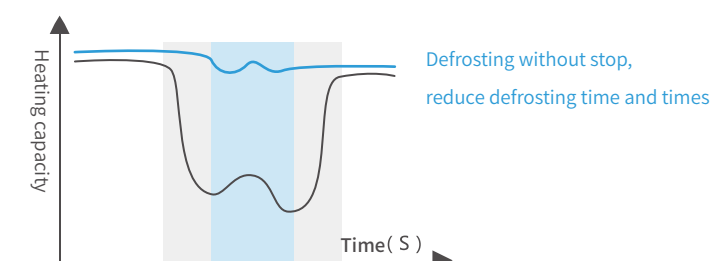





# INTELLIGENT - OPERATION AND MAINTENANCE CONTROL

TCL full DC inverter VRF systems can provide the intelligent operation and maintenance functions, which provides an efficient solution for the intelligent operation and maintenance of buildings, It ensures energy-saving and high-efficient operation and intelligent management.



Non-polar CAN bus communication technology



Multiple control solutions



TCL remote intelligent service center



TCL CAC management system



BMS gateways



AHU connection kit







## 3.6 Intelligent Control

### Smart commissioning

- During installation, the system automatically detects the number of indoor and outdoor units, communication link status, and real-time feedback of installation abnormalities, making installation simple and easy.



### Intelligent detection

- When the equipment is running, the system record the best running status intelligently . And it will adjust the compressor frequency and the step of the EXV for next time automatically .




### Smart detection

- During system operation, data will be recorded , abnormalities will be automatically detected and raised.



## 3.7 Non-polar CAN bus Communication Technology

- TMV6 adopts CAN bus communication technology, which is a communication technology applied in the field of automobile and military industry.

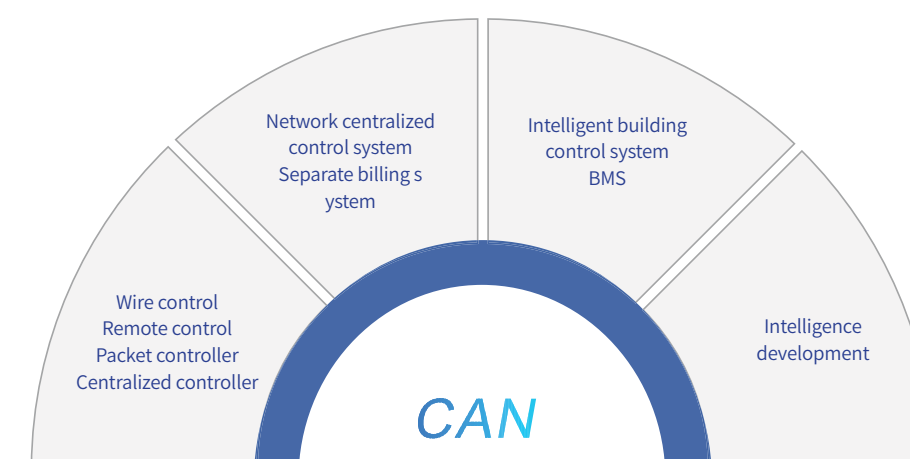

	TMV6 VRF(CAN communication)	Other similar products in the industry(RS 485 communication)
Reliability	High reliability and stable network	The reliability is unstable and easy to be paralyzed
Communication efficiency	Up to 100kbs	About 10kbs
Communication distance	About 2000m	About 1000m
Communication line polarity	No polarity, easy to debug	Polarities need to be distinguished for installation
Scalability	Easy to plug and play	To add new device, the software must be changed, and the scalability is poor





### 3.8 Multiple Control Solutions

- TMV6 provides a variety control solutions for customers to choose .



#### Remote Controller


- Cooling / dehumidification / fan / heating / automatic and other operation settings
- Temperature / fan speed setting
- Sleep/timer/swing/turbo and other functions



GYKQ-52e

#### Wired Controller

- Cooling / dehumidification / fan / heating / automatic and other operation settings
- Temperature / fan speed setting
- Sleep/timer/swing/turbo and other function settings
- Monitoring function, big LCD screen displays the operation status of the unit
- Remote control signal available

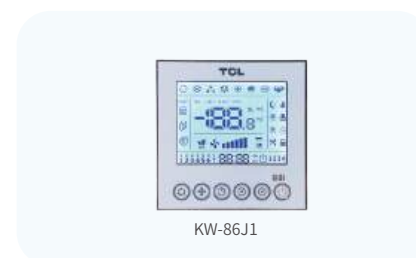

KW-86J1

#### Central Controller


- 7 inches and colorful screen display, beautiful appearance, touch screen, easy operation.
- A variety of combinations, single or multiple machines can be operated simultaneously.
- Up to 16 systems and 180 indoor units can be connected, easy to set indoor units parameters.
- It also has the schedule setting and historical fault query function.



KJ-08A1.00-TCL

### 3.9 TCL Management System

- TCL VRF system adopts the CAN bus communication technology. It connects indoor units with the computer through a network converter, to provide centralized and smart control of the whole systems.

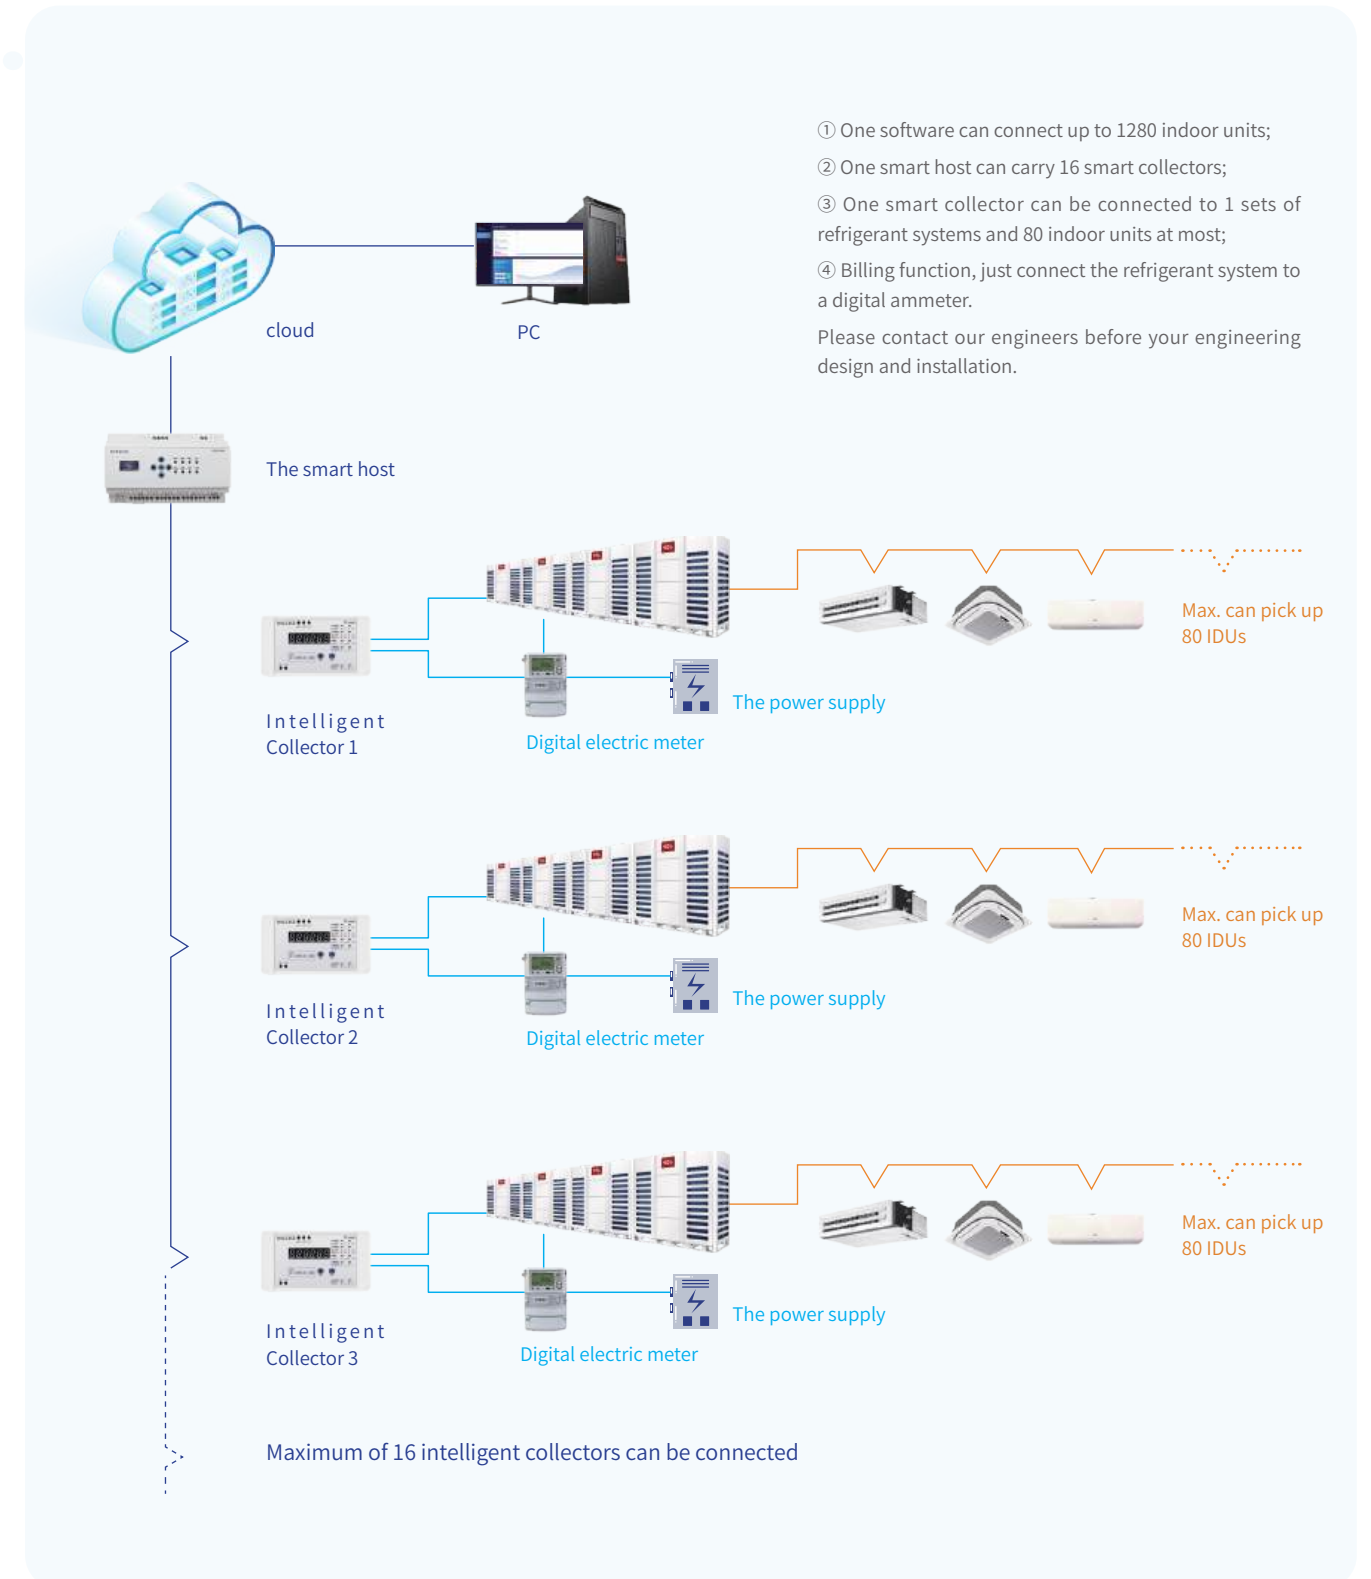




## 4.0 AHU Connection KIT

- Solution to extend TCL VRF technology to third party Air Handling Units.

- ✓ Easy for connecting to third party AHU
- ✓ Setting capacity by DIP
- ✓ Remoter or wire controller can be chosen
- ✓ 3 steps fan motor speed, Low/Mid/High
- ✓ Error status: No error or error occurred


Communication wire

Refrigerant pipe

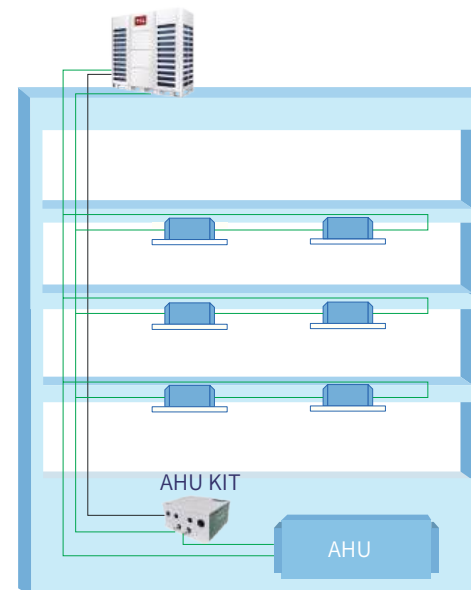

Type	Model Name	Capacity	Pipe dimension	Combination				Description
				ODU	Motor	Pump	Warning signal	
Communication Kit	TMV-AK1	8-20Kw	Φ7.94	TMV6	✓	✓	✓	Room air supply by remote controller or wiring controller
	TMV-AK2	20-40Kw	Φ12.7		✓	✓	✓	
	TMV-AK2	40-65Kw	Φ15.88		✓	✓	✓	

## 4.1 BMS Gateways

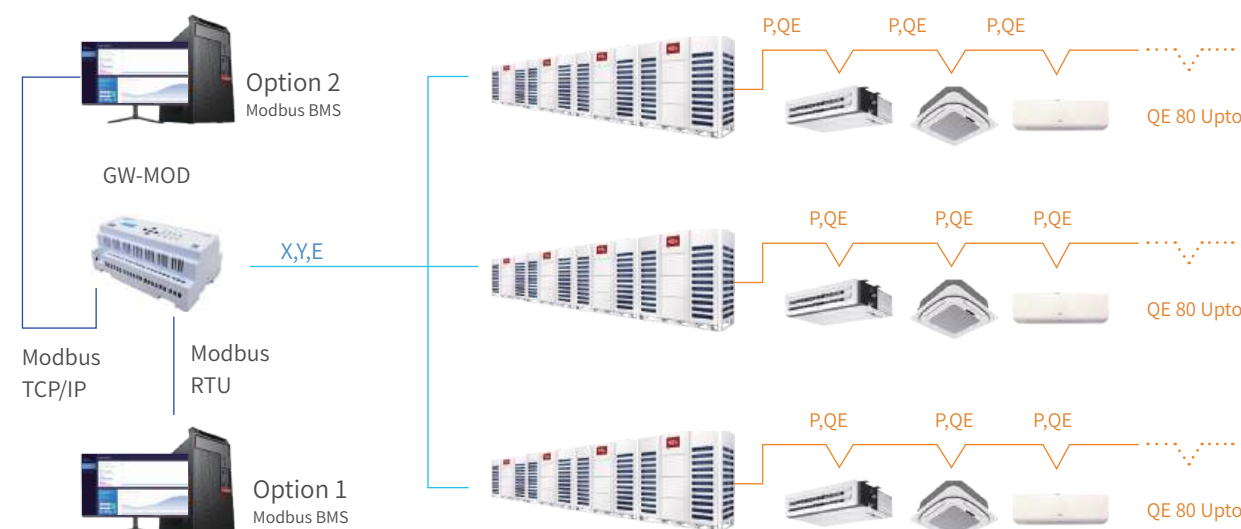

### Separate billing and Arrear lock function

- ① It can store six-month household billing datas, electricity bill query and other functions, users can check and print the bills of each indoor unit.
- ② Maximum 16 refrigerant systems, 32 ammeters, 1280 indoor units can be connected.
- ③ Auto searching indoor and outdoor units in the system.
- ④ Users can set billing parameters for different time periods according to the peaks and valleys.
- ⑤ The air-conditioning system of the arrear user can be locked.




### Remote and centralized control function

- ① Real-time monitor the operating conditions of indoor and outdoor units.
- ② It can monitor and control up to 1280 indoor units, with single, group, and central control.
- ③ The indoor and outdoor units can be configured according to the actual requirement.




### Powerful schedule management function

- ① With monthly/weekly/daily timer and exception date (specified by the user), the user can control the indoor unit according to personal plans.
- ② Single or group IDUs can be controlled according to the final user requirement.

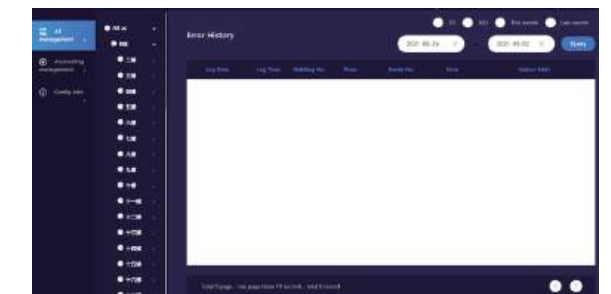

### Data analysis function

- ① System operation data and system failure can be recorded and analyzed;
- ② Operation log will record the user operations.

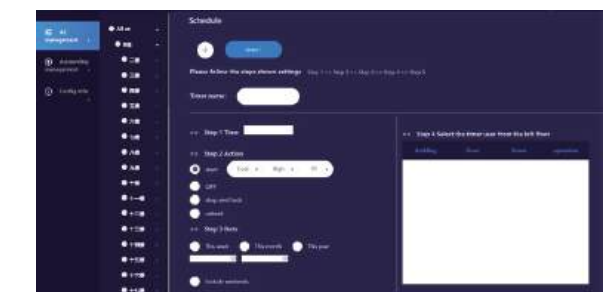

### Key card function

Connected and controlled with hotel key card, the air conditioner can be automatically powered on/off when guests inserts or pulls out the key card.

When insert the key card, air conditioner will start automatically.

When power off, the air conditioners in other rooms can continue to work, even under same system.







## STABLE AND RELIABLE PERFORMANCE

TCL has always insisted on making high-quality products relying on advanced manufacturing equipments and deep technical accumulation. Excellent performance guarantees the stability operation. TCL VRF can make sure stable and high-efficient operation facing the complex and changeable working conditions.



Inverter module cooling protection technology



Six levels oil return technology



High precision refrigerant control technology



- 25 ° C ~ 56 ° C  
Ultra wide operating temperature range



Pressure self-regulating technology



Triple backup function



Rotation function



Multiple protections






## 4.26- Stage Oil Return Technology

- TMV6 is at the leading position on the oil separate, oil return, oil balance and storage technology. The oil system equipped with precise 6 grade management to make sure compressor safety, stability and reliability.

### Multistage Oil Control Technology


- The VRF system have sufficient and balanced oil in working condition to ensure safety and avoid potential oil shortages.

- Level 1: Compressor internal oil separate
- Level 2: Compressor external oil separate
- Level 3: High-efficiency centrifugal oil separator
- Level 4: Oil balance pipes between compressors to ensure compressors running normally
- Level 5: Automatic oil balance system improves the compressor reliability
- Level 6: Smart oil return program to ensure the oil return completely

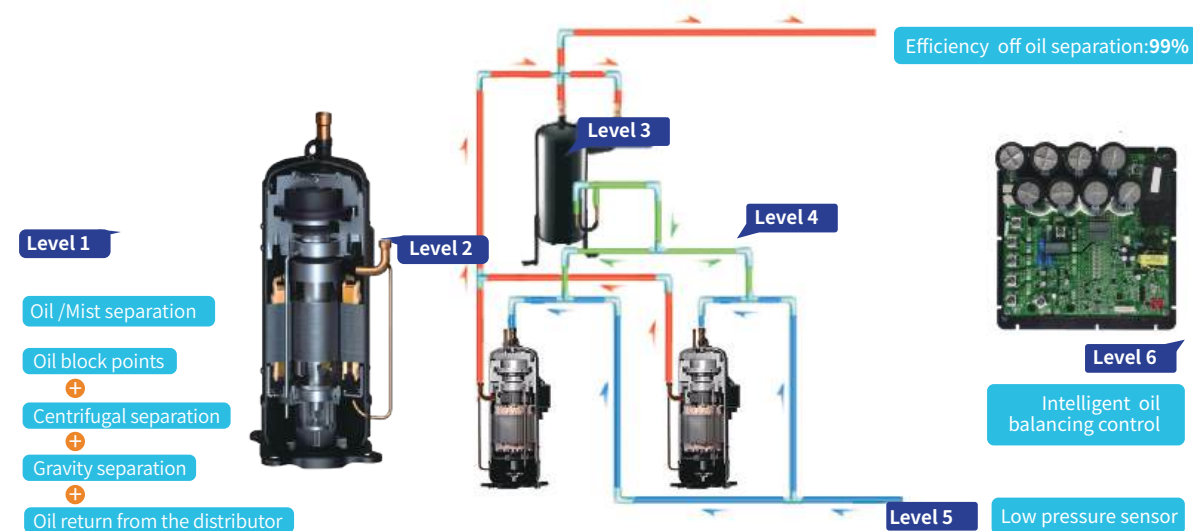


### Automatic oil balancing

- Oil balancing system improves compressor oil storage and reliability, which also ensures the unit in good performance in cooling / heating mode.

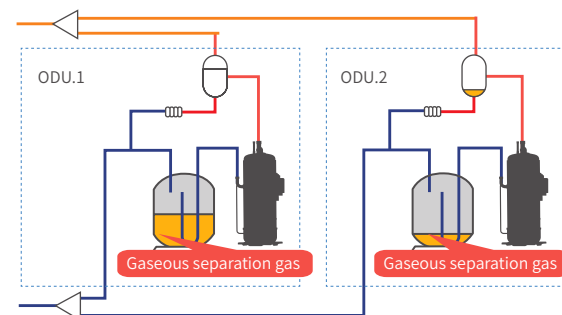

## 4.3 Inverter Module Cooling Protection

- When the outdoor units are running, high temperature will decrease the compressor frequency, reduce the cooling capacity, and shorten the life time. Traditional air-cooled method can make high thermal conductivity and worse heat dissipation performance, but TCL module cooling technology can eliminate the heat of PCB, reduce the working temperature of inverter module and improve the PCB system reliability.

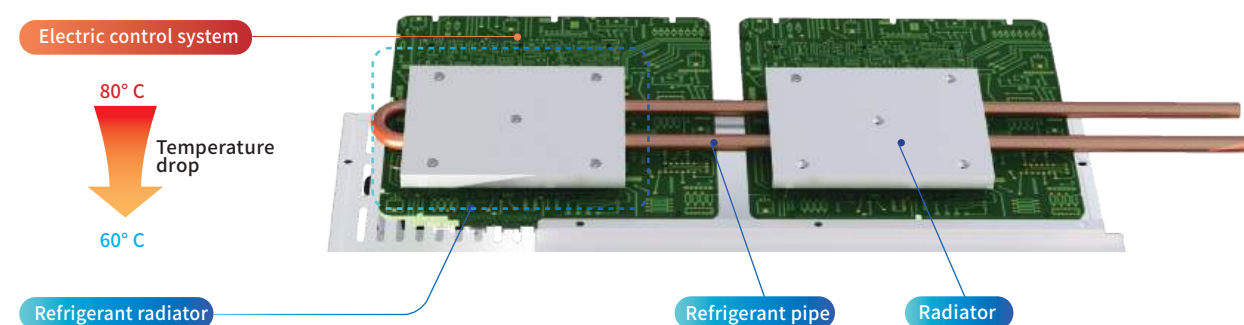


It can help take away the heat of the electric control box, improve the electrical component's reliability when working in a high-temperature environment, and ensure the system stable and safe.


Good structure design between radiator and refrigerant tube, help to reduce the heat resistance very well, to ensure better cooling for PCB.

## 4.4 High Precision Refrigerant Control Function

- The upgraded technology allows the system to manage the volume of refrigerant, and also reduce the refrigerant in entire system and increase efficiency.
- Liquid bypass control technology use multi-electronic expansion valve, it can adjust the refrigerant flow and control the overheating degree of the compressor, ensure the compressor to be highly efficient, safety and reliable.

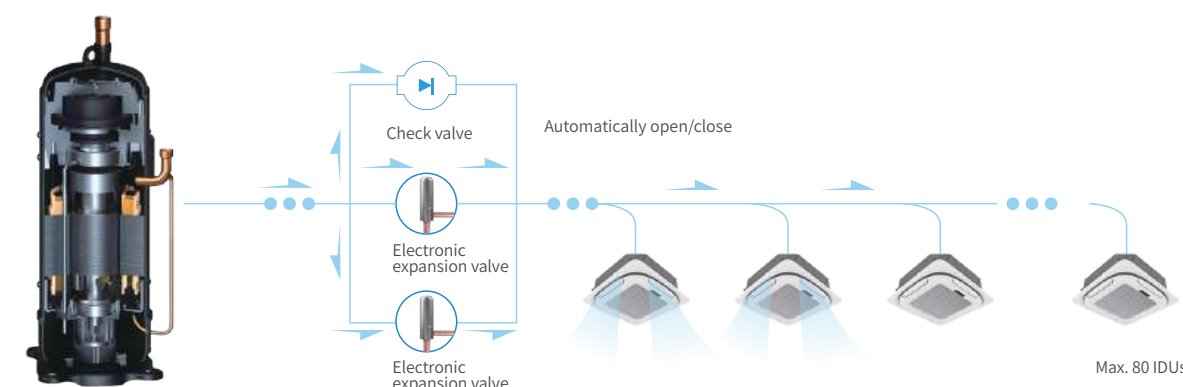

- Dual electronic expansion valve used for outdoor unit, adjust accuracy can reach 3000 pulses, can adjust the refrigerant flow for the whole system.
- Silent electronic expansion valve used for indoor unit, precisely control refrigerant flow, improve the comfort and reliability.

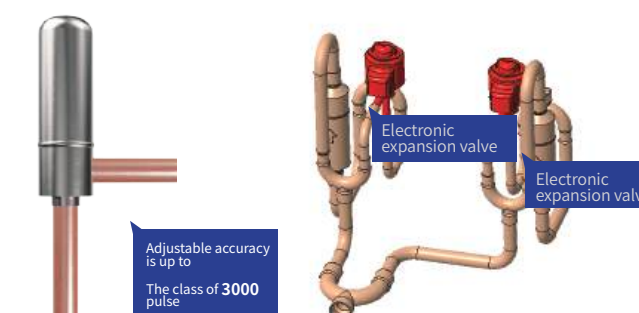


\* Note: General adjustment is 480 level, can be customized to 3000 level adjustment






## 4.5 Wide Voltage Range

- The unit can operate in the range of voltage 290V~460V (International standard voltage  $380V \pm 10\%$ ), satisfy all kinds of voltage conditions.

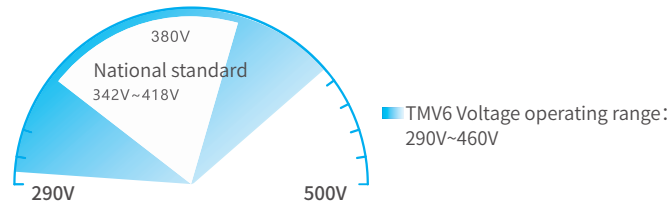


## 4.6 Wide Operation Temperature Range -25°C ~56°C

- Wide operation range, cooling: -5°C ~56°C, heating: -25°C ~28°C.

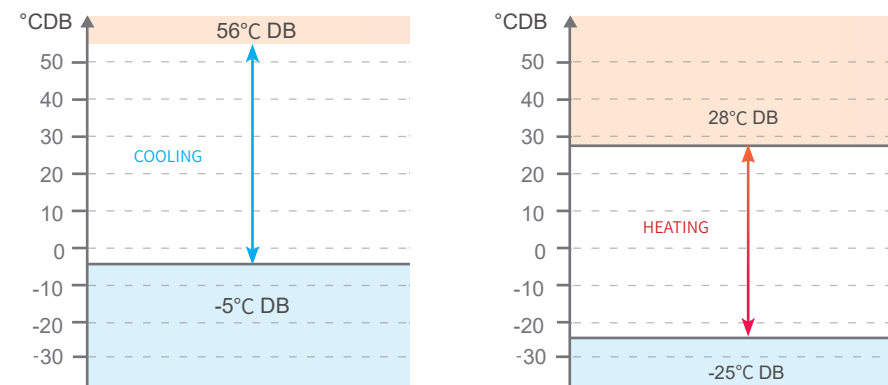

## 4.7 Pressure Self-adjustment Technology


- Pressure sensor is used to check system pressure, and adjust compressor operation frequency, fan speed, electronic expansion valve, to ensure the system with the best performance

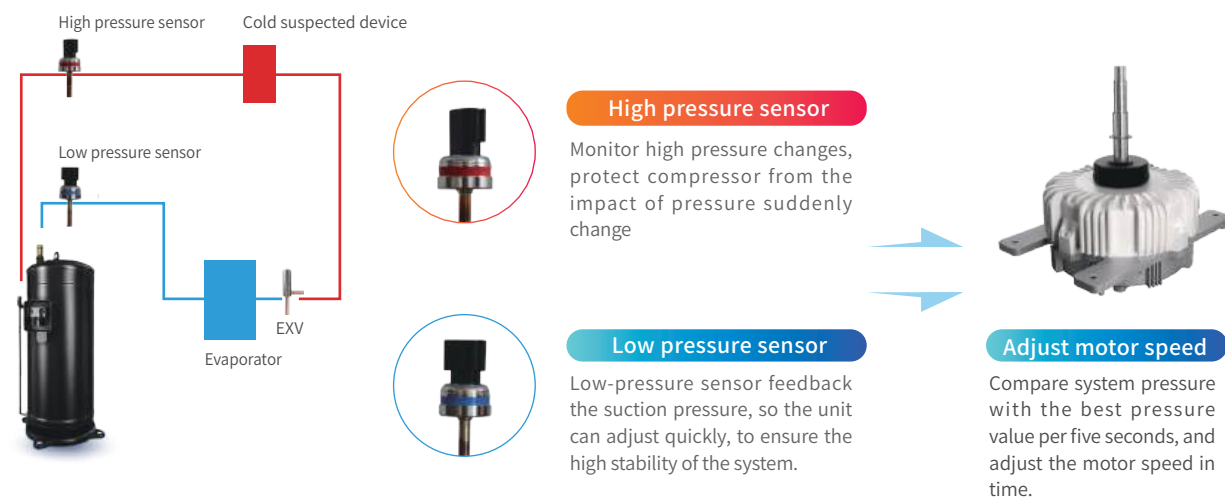

## 4.8 Triple Back-up Operation Technology

### Compressor backup operation

- In units with two compressors, if one compressor fails, the other compressor can run on its own, to ensure the air conditioning system can work stably.




Running state



Emergency operation

### Emergency operation of fan motor

- Some outdoor units are designed with dual fan, if the one fan motor fails, the other motor also can work normally, to avoid impact consumer's work and life.



The normal operation




Emergency

### ODU backup operation

- In a multi-unit system, if one outdoor unit fails, the other modules provide backup so that the system can continue operating.



Running state

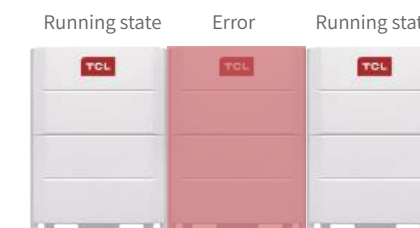

Emergency operation

## 4.9 Rotation Operation Technology

- If the system is connected to multiple modules, in order to ensure the balance of compressor operation, the automatic control of the microprocessor on the host can realize the automatic rotation operation function between the modules, effectively extend the service life of the unit.




## 5.0 Multiple Protection Functions

- Multiple protection functions to ensure the safe operation of the system.




## Anti-adversity function

- The external force blows the outdoor unit fan to rotate in reverse. At this time, start and stop the rotation of the fan, and then restart the fan motor in a forward rotation according to the normal procedure, so as not to damage the fan blades due to excessive starting current.

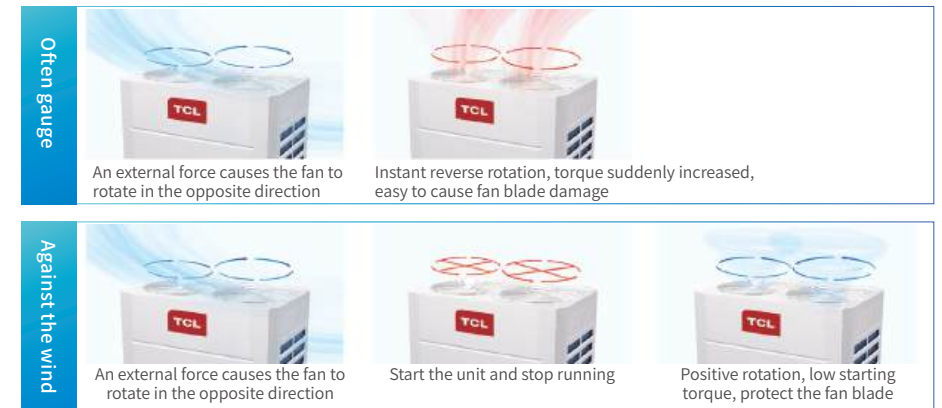

## Phase sequence protection

- When the power cord of the outdoor unit is connected incorrectly, the circuit will start self-protection to avoid impact and damage to the main control board, inverter module and compressor. Ensure the normal operation of the air conditioner, without accidental electrical damage, fire, etc.



## Low voltage recognition function

- Automatically recognize the working voltage, when the voltage is too low, give an early warning in time, and control the power consumption and capacity output of the multi-line system through the corresponding limit frequency.

## Lightning protection

- The outdoor unit has a built-in anti-seismic module, which has anti-seismic and anti-interference functions to ensure the safe and stable operation of the system in bad weather.



## Compressor overload protection

- When the compressor casing or motor temperature is too high, the circuit will automatically cut off to prevent the compressor from overloading and cause electrical damage, fire, etc.



## Motor overheating protection

- When the current exceeds the set value, the temperature will rise, and the motor will be cut off in time during overcurrent operation to protect the motor from burning due to overload.








## 5.1 Anticorrosion Design

### Hydrophilic aluminum fin

- It adopts anti-corrosion and anti-oxidation hydrophilic aluminum foil heat exchange fins, which have multiple protections of lubricating coating, hydrophilic coating and corrosion-resistant coating.

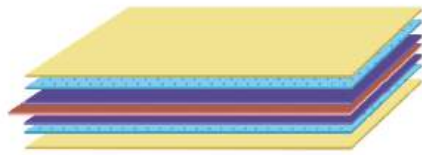

■ Lubrication layer ■ Hydrophilic coating ■ Corrosion resistant coating

### Special corrosion-resistant coil

- Use special anti-corrosion coils. The base layer of ordinary galvanized sheet is increased with electrophoretic layer to achieve anti-corrosion effect. The coil fixing screws are stainless steel screws.



### Electric control anti-corrosion


- The main board is equipped with moisture-proof glue, the sheet metal surface of the electric control box is treated with anti-corrosion spray, and the top of the metal casing fan capacitor is sprayed with anti-corrosion paint separately.

### Pressure vessel

- It adopts surface phosphating treatment with good anti-corrosion performance.

### Thick sheet metal design

- The surface of the sheet metal parts is phosphated and coated with special anti-corrosion materials. It improves the salt spray resistance and heat and humidity resistance, and greatly improves the anti-corrosion ability of the sheet metal.



Phosphating



### Motor protection upgrade

- Improve the protection level of the motor. The motor shaft is made of stainless steel. During the installation process, the motor shaft, nuts, gaskets and exposed motor shaft are coated with anti-rust grease, and the motor body screws and top cover screws are coated with silicone grease.



Silicon grease

### Fastener


- The nails, nuts and washers are made of stainless steel or high anti-corrosion materials, and the screw heads inside the machine and outside the electric control box are coated with silicone grease for anti-corrosion.

### Copper pipe weld

- Anticorrosive paint is sprayed on the welded joints of copper pipes.

## 5.2 Electronic Control Board SMT Placement Technology

- The electronic control main board adopts SMT patch sealing technology to improve the anti-clutter interference, to ensure that the main board is not affected by wind, sand, high temperature and high humidity, and to make the main control board longer.

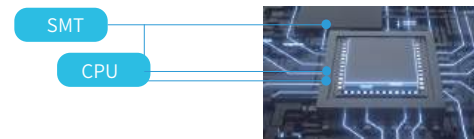

## 5.3 Automatic Anti-snow Function \*

- In the snowy weather conditions in winter, in order to prevent the snow from adversely affecting the top of the outdoor unit fan, the unit will automatically turn on the fan to clear the snow to ensure the normal operation of the unit.



## 5.4 Fan Reverse Dust Removal Function

- The DC fan reverse operation technology can effectively remove dust and clean the inside of the heat exchanger, improve the cleanliness of the heat exchanger, increase the heat exchange efficiency, and prolong the service life of the product.



Normal operation mode



Enable the auto-reverse dust removal function

## 5.5 High-altitude Adaptive Technology

- In high-altitude areas where the air is thin, the unit is prone to insufficient capacity. The TMV6 outdoor unit can automatically recognize the altitude position. When the altitude is too high and the capacity is insufficient, the high altitude adaptive mode will be activated for automatic compensation, which will greatly increase the fan speed and increase the air volume.

## 5.6 Circuit Auto-repair Function

- The TMV6 has the automatic repair function of the electronic control circuit, which can promptly alarm and realize the automatic repair of the circuit in the event of an accident, improve system reliability, and ensure stable system operation.



## 5.7 Black Box Function

- The unit is equipped with a "black box" data storage device, which records operating parameters before failure, quickly finds failure information, provides effective information for maintenance, and improves maintenance efficiency.

\* Note: This function needs to be customized





## CONVENIENT INSTALLATION AND MAINTENANCE

For different application scenarios, different installation environments should be taken into consideration. The TMV6 takes every detail into consideration, in the product appearance design and function, which greatly improves the convenience of installation, speeds up the installation speed, and also improves the convenience of maintenance.



15 basic modules, satisfy all kind of requirement



Big-capacity module design, easy installation and space saving



Super long refrigerant pipeline design, flexible structure



Auto-refrigerant detecting and autocharging function



130Pa The highest static pressure for outdoor unit



Convenient for the transportation, installation and commissioning



Auto-addressing function



ODU without oil balance pipe, compact design



Emergency power-off function for indoor unit maintenance




Commissioning software






## 5.8 Intelligent Multi-connection, Easy To Cope With The Spatial Layout

- In order to meet the needs of different building types for air conditioning equipment, 15 basic outdoor unit modules are provided. The modules of 8-36HP can be combined freely, and the maximum combination can reach 144HP. There are 9 categories of indoor units, with more than 100 models to choose. The maximum internal unit capacity is 56kW. Outdoor units and indoor units can be freely matched and multi-connected. A system can connect up to 80 indoor units to meet the needs of different buildings.

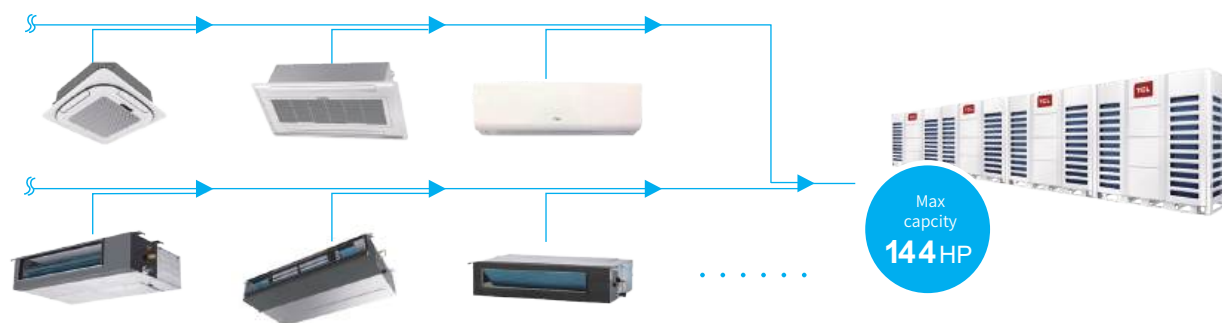



## 5.9 Large-capacity Module Design, Convenient Installation And Space Saving

- The maximum capacity of a single machine is 36HP.
- Smaller body size saves installation space.
- Reduce the workload of wiring, save labor cost and construction period.
- Less installation materials, saving purchase costs.

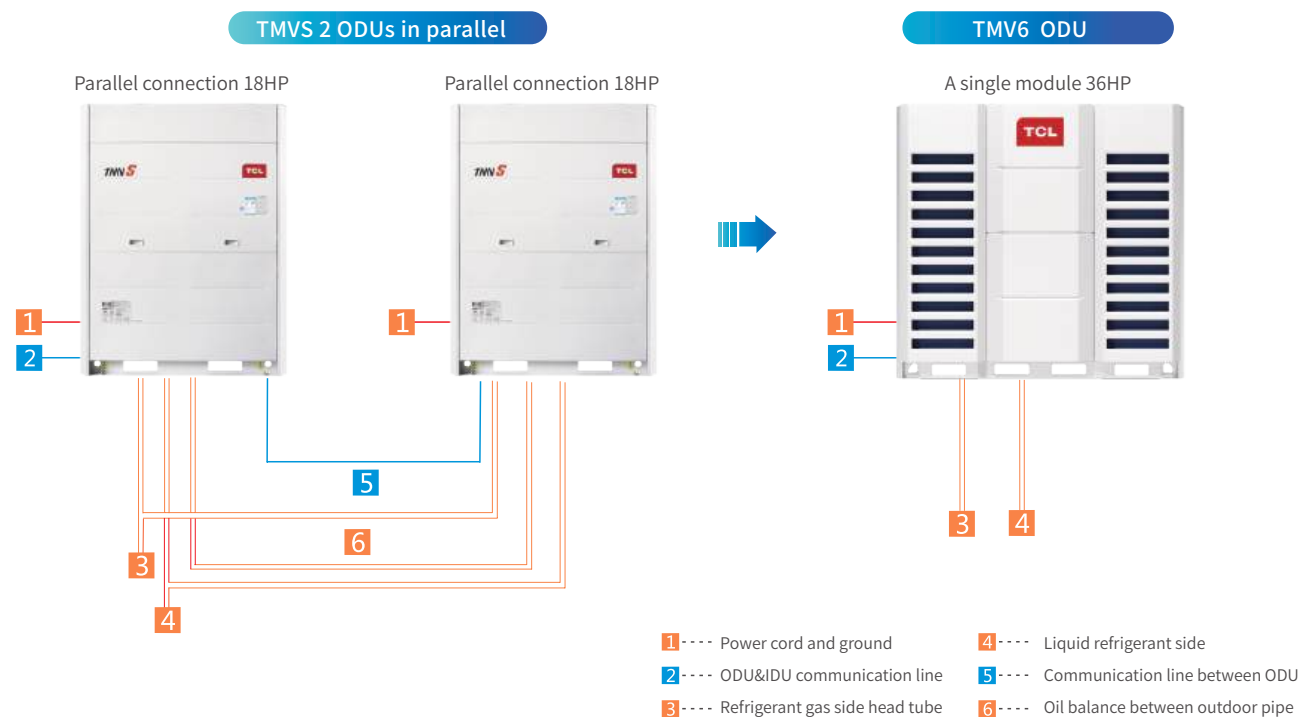

## 6.0 1100m Super Long Piping Design

- The industry-leading piping length, with a total length of 1100m, makes floor design more flexible.
- The max distance between the IDU and the ODU (the higher ODU) is 100m.  
The max distance between the IDU and the ODU (the lower ODU) is 110m.
- The maximum distance between indoor units is 40m.
- The maximum actual single pipe length is 220m.  
The maximum equivalent single tube length is 240m.
- The equivalent length from first indoor distributor to last indoor unit 120m.

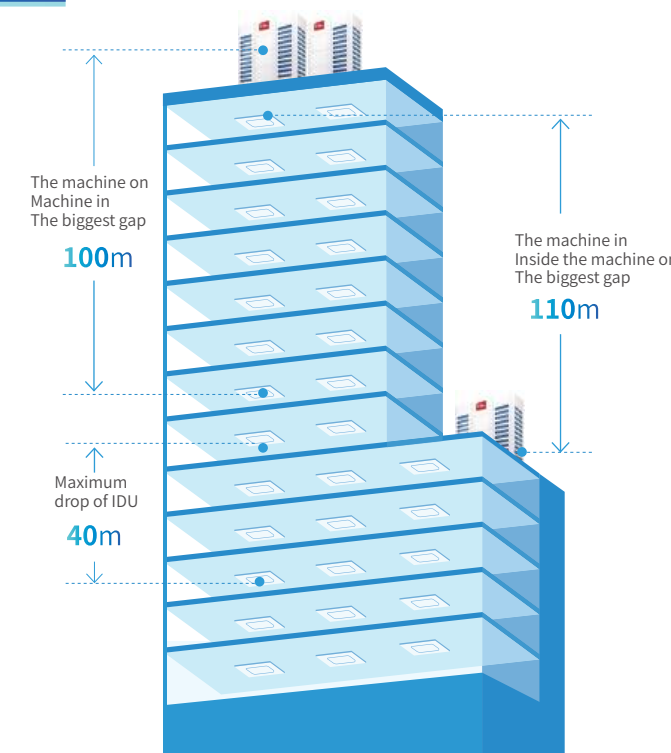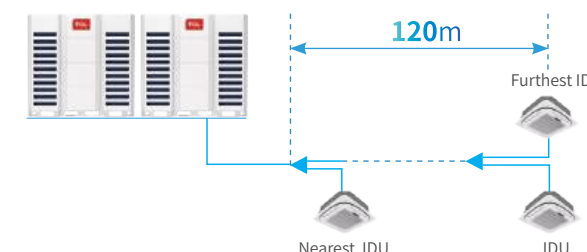


## 6.1 Single System Can Connect 80 IDUs


- TMV6 adopts the international advanced CAN bus communication technology, and one system can connect up to 80 indoor units, ensure stable and reliable in operation, realizes a large-capacity configuration of a single system, and is more flexible in engineering applications.

## 6.2 130Pa External Static Pressure

- The system achieves a higher external static pressure, up to 130Pa\* (factory default external static pressure) blades through the joint action of new fan blades and fans with larger air volume. Inverter fan motor. 85Pa) to ensure the layered or concentrated heat dissipation effect of the outdoor unit.

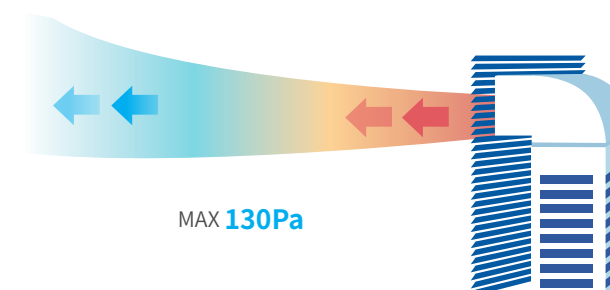

Better heat dissipation, better refrigeration effect

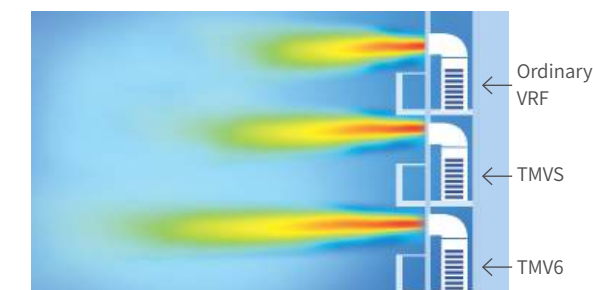

VRF static pressure contrast diagram

\* Note: 130Pa static pressure needs to be customized



## 6.3 Automatic Refrigerant Judgment And Charging

### Automatic refrigerant judgment


- According to the operating status of the system, it will ensure real-time monitor of the amount of refrigerant, intelligent judgment, stable operation of the system.

### Automatic refrigerant charging

- During the installation and maintenance process, the refrigerant can be charged automatically according to the system status.

### Smart refrigerant recovery function\*


- When the system is maintained, the refrigerant is recovered intelligently, which is convenient and quick.

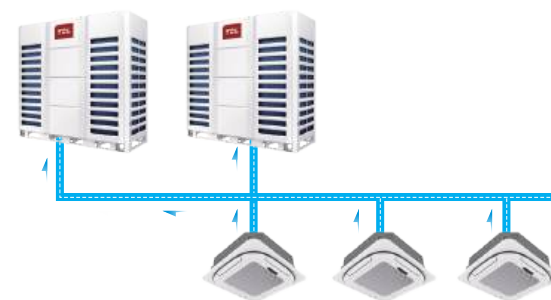

## 6.4 Compact Design And Convenient Transport

- The outdoor unit module has only 4 basic structures with the same height, which simplifies the design process and improves the flexibility of the system.

- Elevator transportation is convenient, no need large equipment such as hoisting, which effectively simplifies the transportation work and saves construction time and manpower.

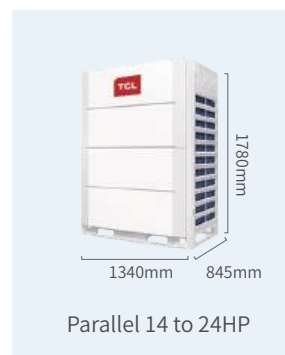

## 6.5 One-button Commissioning Function

- You can choose to perform a one-button trial running on the outdoor unit side, or perform a one-button trial running on any indoor unit side to achieve cooling and heating trial operation, no need turning on the indoor units one by one, facilitating on-site commissioning and improving the quality of project site construction.


## 6.6 Non-polarity Communication Connection

- CAN bus communication mode is applied between indoor and outdoor unit, no need to distinguish between positive and negative poles, and the installation is simpler and more efficient.

## 6.7 No Oil balance Pipe For ODU

- The outdoor units without oil equalizing pipe, which are more convenient for installation and also reduces the error of pipeline leakage.

- Liquid refrigerant tube
- Refrigerant trachea
- Equalizing tubing

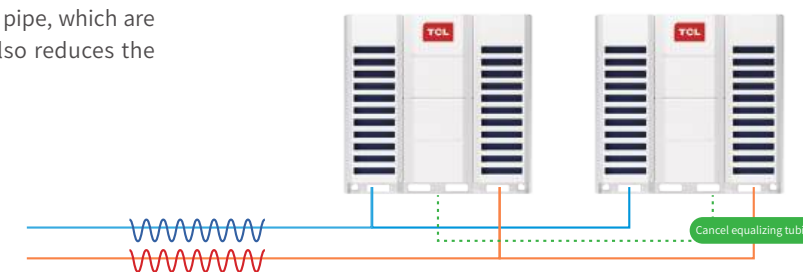


## 6.8 360°pipe Connection Design

- The units can connect the pipes in multiple directions freely, such as the front side, the left side, and the right side, to make the installation more convenient.




## 6.9 Emergency Power-off Function For IDU Maintenance

- If an indoor unit needs to be powered off for maintenance due to failure, in order not to affect the operation of the entire system, the indoor unit can be powered off separately for maintenance, and other indoor units in the system can operate normally.

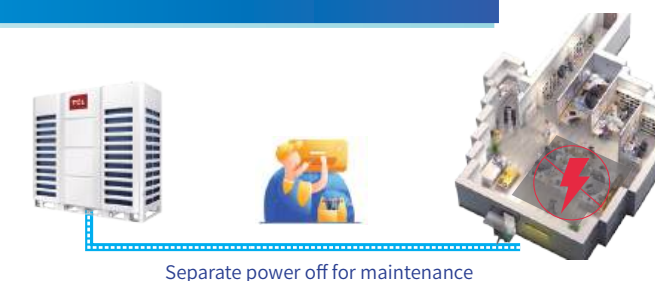

## 7.0 Commissioning Software

- The commissioning software is specially developed for TCL air-conditioning system, which can carry out real-time status monitoring and loading control of the air-conditioning system.
- It can monitor the real-time operation parameters of 4 outdoor units and 80 indoor units in parallel system; And the operating parameters can be showed in Curve; It contains the function of saving the original data of operation, which is convenient for the R & D Engineers to remotely analyze the cause of failure; It also contains the forced load control function of the equipment, which is convenient for loading maintenance verification on the project site.

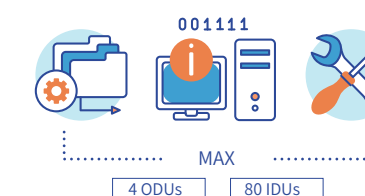

## 7.1 Auto-addressing Function

- The system can realize the automatic allocation of indoor unit address. There is no need to dial code during commissioning, which avoids the trouble of manual setting one by one. It is more intelligent and convenient.







ODU lineup



8 to 12 HP



14 to 24 HP



26-32 HP



34-36 HP

Note: 34HP/36HP are the models of enhanced vapor injection, which can enhance the heating performance under low ambient condition, others are regular models.

ODU Parameters(8-36HP)

			TMV-Vd+***W/N1S-C(E)								
HP			8HP	10HP	12HP	14HP	16HP	18HP	20HP	22HP	24HP
Model:TMV-Vd+***W/N1S-C(E)			252	280	335	400	450	504	560	615	680
Capacity	Cooling capacity	kW	25.2	28.0	33.5	40.0	45.0	50.4	56.0	61.5	68.5
	Heating capacity	kW	27.0	31.5	37.5	45.0	50.0	56.5	63.0	69.0	75.0
Power	Cooling power	kW	5.4	6.8	8.1	10.2	12.1	13.5	15.7	17.7	18.5
	Heating power	kW	5.5	6.7	8.2	10.3	11.8	13.5	15.3	16.9	17.6
	Max.power	kW	11.3	12.4	13.7	16.3	18.4	21.4	23.7	26.1	29.7
Current	Cooling current	A	8.6	10.8	12.9	16.3	19.3	21.5	25.0	28.2	29.4
	Heating current	A	8.7	10.7	13.1	16.4	18.8	21.5	24.4	27.0	28.0
	Max.current	A	20.0	22.0	24.3	28.8	32.6	37.9	42.0	46.2	52.6
Power supply		/	380V ~ 3N/50Hz								
Fan	air volume	(m³/h)	11000	11000	11500	13500	14000	15500	19000	19000	20000
Net dimension(L×W×H)		mm	925×845×1780				1340×845×1780				
Weight	Net weight	kg	215	215	215	265	270	315		315	320
	Type	/	R410A								
Refrigerant	Charged volume	kg	9	9	9	11	11	12	14	14	16
	Operating range	Cooling	-5~56℃								
Heating		-25~28℃									
Connecting pipe diameter	gas pipe	mm	φ 19.1	φ 22.2	φ 25.4	φ 25.4	φ 28.6	φ 28.6	φ 28.6	φ 28.6	φ 28.6
	liquid tube	mm	φ 9.5	φ 9.5	φ 12.7	φ 12.7	φ 12.7	φ 15.9	φ 15.9	φ 15.9	φ 15.9
Outdoor noise leve		dB(A)	56	57	58	59	60	61	61	62	63
Minimum line current		A	20	22	24	29	33	38	42	46	53
Maximum fuse current		A	25	32	32	40	50	50	63	63	63

			TMV-Vd+***W/NIS-C(E)						TMV-Vd+***W/NIS-C(E)			
HP			26HP	28HP	30HP	32HP	34HP	36HP	38HP	40HP	42HP	45HP
Model:TMV-Vd+***W/NIS-C(E)			730	785	850	900	950	1010	1065	1120	1175	1260
Capacity	Cooling capacity	kW	73.0	78.5	85.0	90.0	95.2	101.0	106.5	112.0	117.5	126.0
	Heatingcapacity	kW	81.5	87.5	95.0	100.0	106.0	112.0	119.5	123.5	130.0	140.0
Power	Cooling power	kW	18.5	20.6	22.8	24.5	25.7	27.7	30.1	32.0	34.8	38.6
	Heating power	kW	19.2	20.8	22.9	23.8	25.3	27.2	29.6	31.7	34.6	38.7
	Max.power	kW	31.5	33.3	33.5	34.6	39.4	41.3	43.3	45.3	47.4	49.4
Current	Cooling current	A	29.5	32.8	36.3	39.1	41.0	44.1	48.0	51.0	55.4	61.6
	Heating current	A	30.6	33.1	36.5	37.9	40.4	43.4	47.1	50.5	55.1	61.7
	Max.current	A	55.8	59.0	59.3	61.3	69.9	73.1	76.7	80.3	83.9	87.5
Energy efficiency	IPLV(C)	W/W	8.55	8.55	8.45	8.35	8.30	8.20	8.10	8.00	7.80	7.50
	APF	W.h(W.h)	4.70	4.65	4.65	4.60	4.60	4.50	4.20	4.00	4.00	3.95
Power supply			380V ~ 3N/50Hz									
Fan	air volume	(m³/h)	26000	26000	27000	27000	29000	29000	29000	29000	30000	30000
Net dimension (L×W×H)			1760 × 845 × 1780					1900 × 845 × 1780				
Weight	Net weight	kg	380	380	420	455	455	480	480	480	480	480
	Type	/	R410A									
Refrigerant	Charged volume	kg	18	18	25	25	28	28	28	28	28	28
	Operating range	℃	-5~56℃									
Connecting pipe diameter	Heating	℃	-30~28℃									
	gas pipe	mm	φ 31.8	φ 31.8	φ 34.9	φ 34.9	φ 34.9	φ 34.9	φ 38.1	φ 38.1	φ 38.1	φ 38.1
	liquid tube	mm	φ 19.1	φ 19.1	φ 19.1	φ 19.1	φ 19.1	φ 19.1	φ 19.1	φ 19.1	φ 19.1	φ 19.1
Outdoor noise leve			63	64	65	65	66	66	67	67	68	68
Minimum line current			A	56	59	59	61	70	73	77	80	88
Maximum fuse current			A	63	80	80	80	80	100	100	100	100

1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB,and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB,and outdoor temperature 7°C DB/6°C WB.  
4. Due to ongoing product development, specifications are subject to change without notice.



VRF Systems, Various Combinations

In response to the different needs of building types for air-conditioning equipment, TCL provides four basic outdoor unit modules, which can be freely combined in 2HP increments, and the maximum combination can reach 144HP, which can meet the high level design capacity differentiation, installation and transportation requirements of large and medium-sized air-conditioning projects .

Recommended combination table

HP	Combination1 (Space saving)	Combination2 (High efficiency)	Connected indoor unit qty.	HP	Combination1 (Space saving)	Combination2 (High efficiency)	Connected indoor unit qty.
8	8	8	13	78	28+28+22	20+20+20+18	80
10	10	10	16	80	28+28+24	20+20+20+20	80
12	12	12	19	82	28+28+26	22+20+20+20	80
14	14	14	23	84	28+28+28	22+22+20+20	80
16	16	16	26	86	32+28+26	22+22+22+20	80
18	18	18	29	88	32+28+28	22+22+22+22	80
20	20	20	33	90	32+32+26		80
22	22	22	36	92	32+32+28		80
24	24	12+12	39	94	32+32+30		80
26	26	14+12	43	96	32+32+32		80
28	28	16+12	46	98	36+32+30		80
30	30	16+14	50	100	36+32+32		80
32	32	18+14	53	102	36+36+30		80
34	34	18+16	56	104	36+36+32		80
36	36	18+18	59	106	36+36+34		80
38	22+16	14+12+12	63	108	36+36+36		80
40	22+18	14+14+12	66	110	28+28+28+26		80
42	24+18	14+14+14	69	112	28+28+28+28		80
44	24+20	16+14+14	72	114	32+28+28+26		80
46	24+22	16+16+14	75	116	32+28+28+28		80
48	24+24	16+16+16	78	118	32+32+28+26		80
50	28+22	18+16+16	80	120	32+32+28+28		80
52	28+24	18+18+16	80	122	32+32+32+26		80
54	28+26	18+18+18	80	124	32+32+32+28		80
56	28+28	14+14+14+14	80	126	32+32+32+30		80
58	32+26	16+14+14+14	80	128	32+32+32+32		80
60	32+28	16+16+14+14	80	130	36+32+32+30		80
62	32+30	16+16+16+14	80	132	36+32+32+32		80
64	32+32	16+16+16+16	80	134	36+36+32+30		80
66	36+30	18+16+16+16	80	136	36+36+32+32		80
68	36+32	18+18+16+16	80	138	36+36+36+30		80
70	36+34	18+18+18+16	80	140	36+36+36+32		80
72	36+36	18+18+18+18	80	142	36+36+36+34		80
74	28+24+22	20+18+18+18	80	144	36+36+36+36		80
76	28+24+24	20+20+18+18	80				

Space Saving Combination

2 ODU's

HP		38	40	42	44	46	48	50	52	54	
Recommended combination		22+16	22+18	24+18	24+20	24+22	24+24	28+22	28+24	28+26	
Model:TMV-Vd+**W/NIS-C(E)		1065	1119	1184	1240	1295	1360	1400	1465	1515	
Naminal cooling *1	(kW)	106.5	111.9	118.4	124	129.5	136	140	146.5	151.5	
Naminal heating*2	(kW)	119	125	131	138	144	150	156.5	162.5	169	
Rated cooling power input	(kW)	29.74	31.15	31.94	34.13	36.13	36.92	38.22	39.01	39.05	
Rated heating power input	(kW)	28.69	30.42	31.09	32.91	34.49	35.16	37.68	38.35	39.95	
Power supply	/	380V ∼ 3N 50Hz/60Hz									
Compressor type	-	DV Inverter Scroll									
Dimension (W×D×H)	(mm)	(1340×845×1780) ×2						1760×845×1780 +1340×845×1780		(1760×845×1780) ×2	
Motor	Type		DC Inverter								
	Air volume	m³/h	33000	34500	35500	39000	39000	40000	45000	46000	52000
	Drive type		Direct								
Net weight	kg	585	595	610	645	645	660	695	710	760	
Operation noise *3	dB(A)	64	65	65	65	65	66	66	66	66	
Min. Amps *4	A	46.2+32.6	46.2+37.9	52.6+37.9	52.6+42.0	52.6+46.2	52.6+52.6	59+46.2	59.0+52.6	59.0+55.8	
MFC *4	A	63+50	63+50	63+50	63+63	63+63	63+63	80+63	80+63	80+63	

HP		56	58	60	62	64	66	68	70	72	
Recommended combination		28+28	32+26	32+28	32+30	32+32	36+30	36+32	36+34	36+36	
Model:TMV-Vd+***W/NIS-C(E)		1570	1630	1685	1750	1800	1850	1900	1950	2000	
Nominal cooling *1	(kW)	157	163	168.5	175	180	185	190	195	200	
Nominal heating*2	(kW)	175	181.5	187.5	195	200	206	212	218	224	
Rated cooling power input	(kW)	41.10	43.03	45.08	47.29	49.06	50.44	52.21	53.36	55.36	
Rated heating power input	(kW)	41.54	42.97	44.56	46.67	47.58	50.08	50.99	52.50	54.40	
Power supply	/	380V ~ 3N 50Hz/60Hz									
Compressor type	-	DV Inverter Scroll									
Dimension (W×D×H)	(mm)	(1760×845×1780) ×2					1900×845×1780+ 1760×845×1780		(1900×845×1780) ×2		
Motor	Type	DC Inverter									
	Air volume	m³/h	52000	53000	53000	54000	54000	56000	56000	58000	58000
	Drive type		Direct								
Net weight	kg	760	800	800	840	840	900	900	960	960	
Operation noise *3	dB(A)	67	67	67	68	68	69	69	69	69	
Min. current *4	A	59.0+59.0	61.3+55.8	61.3+59.0	61.3+59.3	61.3+61.3	73.1+59.3	73.1+61.3	73.1+69.9	73.1+73.1	
MFC *4	A	80+80	80+63	80+80	80+80	80+80	100+80	100+80	100+80	100+100	

\*1.Rated cooling capacity test conditions: indoor 27℃ DB/19℃ WB, outdoor 35℃ DB/24℃ WB  
\*2. Rated heating capacity test conditions: indoor 20℃ DB/15℃ WB, outdoor 7℃ DB/6℃ WB, The performance parameters of the equipment are supposed to change due to product improvements, please note it would be not notice for this. Please refer to the product nameplate for specific parameters  
\*3. The noise is in accordance with the value tested under GB/T 18837-2015  
\*4. The air switch is selected according to the maximum fuse current, the electrical wiring specification is selected according to the minimum wire current.





Space Saving Combination

3 ODU's

HP		74	76	78	80	82	84	86	88	90	
Recommended combination		28+24+22	28+24+24	28+28+22	28+28+24	28+28+26	28+28+28	32+28+26	32+28+28	32+32+26	
Model:TMV-VD+***W/AS-D		2080	2145	2185	2250	2300	2355	2415	2470	2530	
Nominal cooling capacity *1	(kW)	208	214.5	218.5	225	230	235.5	241.5	247	253	
Nominal heating capacity *2	(kW)	231.5	237.5	244	250	256.5	262.5	269	275	281.5	
Reted cooling power input	(kW)	56.68	57.47	58.77	59.56	59.60	61.65	63.58	65.63	67.56	
Rated heating power input	(kW)	55.26	55.93	58.45	59.12	60.72	62.31	63.74	65.33	66.76	
Power supply	/	380V ~ 3N 50Hz/60Hz									
Compressor type	-	DC inverter Scroll									
Dimension (W×D×H)	(mm)	1760×845×1780+ (1340×845×1780)×2		(1760×845×1780)×2+ 1340×845×1780		(1760×845×1780)×3					
Motor	Type	DC Inverter									
	Air volume	m³/h	65000	66000	71000	72000	78000	78000	79000	79000	80000
	Drive type		Direct								
Net	kg	1025	1040	1075	1090	1140	1140	1180	1180	1220	
Operation level *3	dB(A)	68	68	68	68	68	68	69	69	69	
Min. current *4	A	59.0+52.6+46.2	59.0+52.6+52.6	59.0+59.0+46.2	59.0+59.0+52.6	59.0+59.0+55.8	59.0+59.0+59.0	61.3+59.0+55.8	61.3+59.0+59.0	61.3+61.3+55.8	
MFC *4	A	80+63+63	80+63+63	80+80+63	80+80+63	80+80+63	80+80+80	80+80+63	80+80+63	80+80+63	

HP		92	94	96	98	100	102	104	106	108	
Recommended combination		32+32+28	32+32+30	32+32+32	36+32+30	36+32+32	36+36+30	36+36+32	36+36+34	36+36+36	
Model:TMV-VD+***W/AS-D		2585	2650	2700	2750	2800	2850	2900	2950	3000	
Nominal cooling *1	(kW)	258.5	265	270	275	280	285	290	295	300	
Nominal heating *2	(kW)	287.5	295	300	307	312	319	324	330	336	
Rated cooling power input	(kW)	69.61	71.82	73.59	74.97	76.74	78.12	79.89	81.04	83.04	
Rated heating power input	(kW)	68.35	70.46	71.37	73.87	74.78	77.28	78.19	79.70	81.60	
Power supply	/	380V ~ 3N 50Hz/60Hz									
Compressor type	-	DC inverter scroll									
Dimension (W×D×H)	(mm)	(1760×845×1780)×3			(1900×845×1780) +(1760×845×1780)×2		(1900×845×1780)×2 +(1760×845×1780)		(1900×845×1780)×3		
Motor	Type	DC inverter									
	Air volume	m³/h	80000	81000	81000	83000	83000	85000	85000	87000	87000
	Drive way		Direct								
Net weight	kg	1220	1260	1260	1320	1320	1380	1380	1440	1440	
Operation noise*3	dB(A)	69	69	70	70	70	71	71	71	71	
Min. current*4	A	61.3+61.3+59.0	61.3+61.3+59.3	61.3+61.3+61.3	73.1+61.3+59.3	73.1+61.3+61.3	73.1+73.1+59.3	73.1+73.1+61.3	73.1+73.1+69.9	73.1+73.1+73.1	
MFC *4	A	80+80+80	80+80+80	80+80+80	100+80+80	100+80+80	100+100+80	100+100+80	100+100+80	100+100+100	

\*1.Rated cooling capacity test conditions: indoor 27℃ DB/19℃ WB, outdoor 35℃ DB/24℃ WB

\*2. Rated heating capacity test conditions: indoor 20℃ DB/15℃ WB, outdoor 7℃ DB/6℃ WB, The performance parameters of the equipment are supposed to change due to product improvements. Please refer to the product nameplate for specific parameters

\*3. The noise is in accordance with the value tested under GB/T 18837-2015

\*4. The air switch is selected according to the maximum fuse current, the electrical wiring specification is selected according to the minimum wire current.

Space Saving Combination

4 ODU's

HP		110	112	114	116	118	120	122	124	126
Recommended combination		28+28+28+26	28+28+28+28	32+28+28+26	32+28+28+28	32+32+28+26	32+32+28+28	32+32+32+26	32+32+32+28	32+32+32+30
Model:TMV-VD+***W/AS-D		3085	3140	3200	3255	3315	3370	3430	3485	3550
Nominal cooling capacity *1	(kW)	308.5	314	320	325.5	331.5	337	343	348.5	355
Nominal heating capacity *2	(kW)	344	350	356.5	362.5	369	375	381.5	387.5	395
Reted cooling power input	(kW)	80.20	82.20	84.13	86.18	88.11	90.16	92.09	94.14	96.35
Rated heating power input	(kW)	81.50	83.08	84.51	86.10	87.53	89.12	90.55	92.14	94.25
Power supply	/	380V ~ 3N 50Hz/60Hz								
Compressor type	-	DC inverter Scroll								
Dimension (W×D×H)	(mm)	(1760×845×1780)×4								
Motor	Type	DC inverter								
	Air volume	m³/h	104000	104000	105000	105000	106000	106000	107000	108000
	Drive type	Direct								
Net weight	kg	1520	1520	1560	1560	1600	1600	1640	1640	1680
Operation noise*3	dB(A)	69	69	70	70	70	70	70	70	70
Min. current*4	A	59.0+59.0+ 59.0+55.8	59.0+59.0+ 59.0+59.0	61.3+59.0+ 59.0+55.8	61.3+59.0+ 59.0+59.0	61.3+61.3+ 59.0+55.8	61.3+61.3+ 59.0+59.0	61.3+61.3+ 61.3+55.8	61.3+61.3+ 61.3+59.0	61.3+61.3+ 61.3+59.3
MFC *4	A	80+80+ 80+63	80+80+ 80+80	80+80+ 80+63	80+80+ 80+80	80+80+ 80+80	80+80+ 80+80	80+80+ 80+80	80+80+ 80+80	80+80+ 80+80

HP		128	130	132	134	136	138	140	142	144	
Recommended combination		32+32 +32+32	36+32 +32+30	36+32 +32+32	36+36 +32+30	36+36+ 32+32	36+36 +36+30	36+36 +36+32	36+36 +36+34	36+36+ 36+36	
Model:TMV-VD+***W/AS-D		3600	3650	3700	3750	3800	3850	3900	3950	4000	
Nominal cooling*1	(kW)	360	365	370	375	380	385	390	395	400	
Nominal heating*2	(kW)	400	407	412	419	424	431	436	442	448	
Rated cooling power input	(kW)	98.12	99.50	101.27	102.65	104.42	105.80	107.57	108.72	110.72	
Rated heating power input	(kW)	95.16	97.66	98.57	101.07	101.98	104.48	105.39	106.90	108.80	
Power supply	/	380V ~ 3N 50Hz/60Hz									
Compressor type	-	DC inverter scroll									
Dimension (W×D×H)	(mm)	(1760×845×1780)×4	(1900×845×1780) +(1760×845×1780)×3		(1900×845×1780)×2 +(1760×845×1780)×2		(1900×845×1780)×3 +(1760×845×1780)		(1900×845×1780)×4		
Motor	Type	DC inverter									
	Air volume	m³/h	108000	110000	110000	112000	112000	114000	114000	116000	116000
	Drive type	Direct									
Net weight	kg	1680	1740	1740	1800	1800	1860	1860	1920	1920	
Operation noise*3	dB(A)	70	71	71	71	71	71	71	71	71	
Min. current*4	A	61.3+61.3+ 61.3+61.3	73.1+61.3+ 61.3+59.3	73.1+61.3+ 61.3+61.3	73.1+73.1+ 61.3+59.3	73.1+73.1+ 61.3+61.3	73.1+73.1+ 73.1+59.3	73.1+73.1+ 73.1+61.3	73.1+73.1+ 73.1+69.9	73.1+73.1+ 73.1+73.1	
MFC *4	A	80+80+ 80+80	100+80+ 80+80	100+80+ 80+80	100+100+ 80+80	100+100+ 80+80	100+100+ 100+80	100+100+ 100+80	100+100+ 100+80	100+100+ 100+100	

\*1.Rated cooling capacity test conditions: indoor 27℃ DB/19℃ WB, outdoor 35℃ DB/24℃ WB

\*2. Rated heating capacity test conditions: indoor 20℃ DB/15℃ WB, outdoor 7℃ DB/6℃ WB, The performance parameters of the equipment are supposed to change due to product improvements. Please refer to the product nameplate for specific parameters

\*3. The noise is in accordance with the value tested under GB/T 18837-2015

\*4. The air switch is selected according to the maximum fuse current, the electrical wiring specification is selected according to the minimum wire current.



High Efficiency Combination

2 ODU's

HP		24	26	28	30	32	34	36	
Recommended combination		12+12	14+12	16+12	16+14	18+14	18+16	18+18	
Model:TMV-Vd+***W/NIS-C(E)		670	735	785	850	904	954	1008	
Nominal cooling *1	(kW)	67	73.5	78.5	85	90.4	95.4	100.8	
Nominal heating *2	(kW)	75	82.5	87.5	95	101	106	112	
Rated cooling power input	(kW)	16.18	18.29	20.16	22.27	23.68	25.55	26.96	
Rated heating power input	(kW)	16.40	18.50	19.98	22.08	23.81	25.29	27.02	
Power supply		/ 380V ~ 3N 50Hz/60Hz							
Compressor type		- DC inverter Scroll							
Dimension (W×D×H)		(mm)	(925×845×1780) ×2	(1340×845×1780) + (925×845×1780)		(1340×845×1780) ×2			
Motor	Type		DC Inverter						
	Air volume	m³/h	23000	25000	25500	27500	29000	29500	31000
	Drive way		Direct						
Net weight		kg	430	485	485	540	550	550	560
Operation noise *3		dB(A)	61	61	62	62	63	63	64
Min. current *4		A	24.3+24.3	28.8+24.3	32.6+24.3	32.6+28.8	37.9+28.8	37.9+32.6	37.9+37.9
MFC *4		A	32+32	40+32	50+32	50+40	50+40	50+50	50+50

3 ODU's

HP		38	40	42	44	46	48	50	52	54
Recommended combination		14+12+12	14+14+12	14+14+14	16+14+14	16+16+14	16+16+16	18+16+16	18+18+16	18+18+18
Model:TMV-Vd+***W/NIS-C(E)		1070	1135	1200	1250	1300	1350	1404	1458	1512
Nominal cooling *1	(kW)	107	113.5	120	125	130	135	140.4	145.8	151.2
Nominal heating *2	(kW)	120	127.5	135	140	145	150	156	162	168
Rated cooling power input	(kW)	26.38	28.49	30.60	32.47	34.34	36.21	37.62	39.03	40.44
Rated heating power input	(kW)	26.70	28.80	30.90	32.38	33.86	35.34	37.07	38.80	40.53
Power supply	/	380V ~ 3N 50Hz/60Hz								
Compressor type	-	DC inverter scroll								
Dimension (W×D×H)	(mm)	(1340×845×1780)+(925×845×1780) X2	(1340×845×1780) ×2+ (925×845×1780)	(1340×845×1780)×3						
Motor	Type	DC inverter								
	Air volume	m³/h	36500	38500	40500	41000	41500	42000	43500	45000
	Drive type	Direct								
Net weight	kg	700	755	810	810	810	810	820	830	840
Operation noise *3	dB(A)	63	63	63	64	64	64	65	65	65
Min. current*4	A	28.8+24.3 +24.3	28.8+28.8 +24.3	28.8+28.8 +28.8	32.6+28.8 +28.8	32.6+32.6 +28.8	32.6+32.6 +32.6	37.9+32.6 +32.6	37.9+37.9 32.6	37.9+37.9 +37.9
MFC *4	A	40+32+32	40+40+32	40+40+40	50+40+40	50+50+40	50+50+50	50+50+50	50+50+50	50+50+50

\*1.Rated cooling capacity test conditions: indoor 27°C DB/19°C WB, outdoor 35°C DB/24°C WB  
\*2. Rated heating capacity test conditions: indoor 20°C DB/15°C WB, outdoor 7 °C DB/6°C WB, The performance parameters of the equipment are supposed to change due to product improvements. Please refer to the product nameplate for specific parameters  
\*3. The noise is in accordance with the value tested under GB/T 18837-2015  
\*4. The air switch is selected according to the maximum fuse current, the electrical wiring specification is selected according to the minimum wire current.

High Efficiency Combination

4 ODU's

HP		56	58	60	62	64	66	68	70	72
Recommended combination		14+14+14+14	16+14+14+14	16+16+14+14	16+16+16+14	16+16+16+16	18+16+16+16	18+18+16+16	18+18+18+16	18+18+18+18
Model:TMV-Vd+***W/NIS-C(E)		1600	1650	1700	1750	1800	1854	1908	1962	2016
Nominal cooling *1	(kW)	160	165	170	175	180	185.4	190.8	196.2	201.6
Nominal heating capacity *2	(kW)	180	185	190	195	200	206	212	218	224
Reted cooling power input	(kW)	40.80	42.67	44.54	46.41	48.28	49.69	51.10	52.51	53.92
Rated heating power input	(kW)	41.20	42.68	44.16	45.64	47.12	48.85	50.58	52.31	54.04
Power supply	/	380V ~ 3N 50Hz/60Hz								
Compressor type	-	DC inverter Scroll								
Dimension (W×D×H)	(mm)	(1340×845×1780)×4								
Motor	Type	DC inverter								
	Air volume	m³/h	54000	54500	55000	55500	56000	57500	59000	60500
	Driver type	Direct								
Net weight	kg	1080	1080	1080	1080	1080	1090	1100	1100	1120
Operation noise *3	dB(A)	65	65	65	65	66	66	66	66	67
Min. current*4	A	28.8+28.8 +28.8+28.8	32.6+28.8 +28.8+28.8	32.6+32.6 +28.8+28.8	32.6+32.6 +32.6+28.8	32.6+32.6 +32.6+32.6	37.9+32.6 +32.6+32.6	37.9+37.9 +32.6+32.6	37.9+37.9 +37.9+32.6	37.9+37.9 +37.9+37.9
MFC *4	A	40+40+ 40+40	50+40+ 40+40	50+50+ 40+40	50+50+ 50+40	50+50+ 50+50	50+50+ 50+50	50+50+ 50+50	50+50+ 50+50	50+50+ 50+50

HP		74	76	78	80	82	84	86	88
Recommended combination		20+18 +18+18	20+20+ 18+18	20+20 +20+18	20+20 +20+20	22+20 +20+20	22+22 +20+20	22+22 +22+20	22+22 +22+22
Model:TMV-Vd+***W/NIS-C(E)		2072	2128	2184	2240	2295	2350	2405	2460
Nominal cooling *1	(kW)	207.2	212.8	218.4	224	229.5	235	240.5	246
Nominal heating capacity *2	(kW)	231	238	245	252	258	264	270	276
Reted cooling power input	(kW)	56.11	58.30	60.49	62.68	64.68	66.68	68.68	70.68
Rated heating power input	(kW)	55.86	57.68	59.50	61.32	62.90	64.48	66.06	67.64
Power supply	/	380V ~ 3N 50Hz/60Hz							
Compressor type	-	DC inverter Scroll							
Dimension (W×D×H)	(mm)	(1760×845×1780)×4							
Motor	Type	DC inverter							
	Air volume	m³/h	65500	69000	72500	76000	76000	76000	76000
	Drive type	Drrict							
Net weight	kg	1155	1190	1225	1260	1260	1260	1260	1260
Operation noise *3	dB(A)	67	67	67	67	67	67	67	68
Min. current*4	A	42.0+37.9 +37.9+37.9	42.0+42.0 +37.9+37.9	42.0+42.0 +42.0+37.9	42.0+42.0 +42.0+42.0	46.2+42.0+ 42.0+42.0	46.2+46.2 +42.0+42.0	46.2+46.2 +46.2+42.0	46.2+46.2 +46.2+46.2
MFC *4	A	63+50+ 50+50	63+63+ 50+50	63+63+ 63+50	63+63+ 63+63	63+63+ 63+63	63+63+ 63+63	63+63+ 63+63	63+63+ 63+63

\*1: Cooling capacity test working condition: indoor temperature 27°C DB/19°C WB, outdoor temperature 35°C DB/24°C WB  
\*2: Heat production test conditions: indoor temperature 20°C DB/15°C WB, outdoor temperature 7°C DB/6°C WB  
\*3: Noise according to GB/T 18837-2015 test value  
\*4: Select air switch according to the maximum fuse current, select electrical wiring specifications according to the minimum line current.  
Unit performance parameters are subject to modification without notice. For details, see the product nameplate.



# Mini VRF

Full DC Inverter MINI VRF Unit



Powerful



High Efficiency



Comfortable



Stable







## 7.2 Strong Power, Stable Operation

### High efficiency full DC inverter and twin rotary compressor

- TCL Mini VRF use full DC inverter twin rotary compressor, which has high- efficiency both for full load condition and partial load condition, also leads to low noise, stable and reliable operation.




### High efficiency DC fan motor

- The stepless regulation of the fan motor can meet the actual requirement of the capacity output, efficiency of motor is increased up to be 45%, higher efficiency in low speed



### Electrical control box refrigerant cooling technology

- The refrigerant cooling technology can cool the PCBs in high ambient temperature condition, which improves the reliability, efficiency and lifespan of the MINI VRF units.

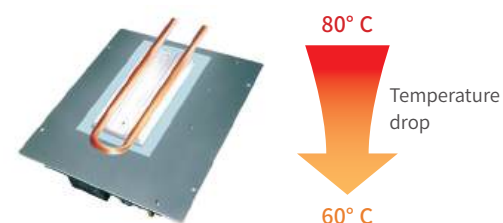

### Wide operation temperature range


- The Mini VRF can operate under -20°C to ensure the heating demand, operate up to 54°C to make sure the cooling capacity output with high efficiency and stability.

## 7.3 Energy Saving And Environmental Friendly

### IPLV(C) up to 6.7, high energy efficiency

- The TCL mini VRF adopts full DC inverter compressor, DC fan motor, high-precision electronic expansion valve to create a durable system and make the system energy efficiency up to 6.7.

IPLV(C) ● TCL Mini VER ● National level 1 energy efficiency standard

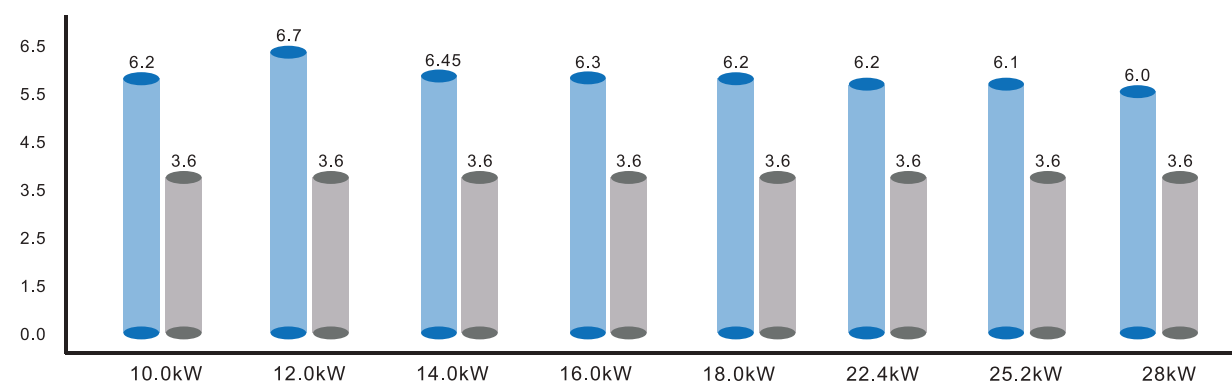

### R410A High-efficiency and environmentally friendly refrigerant

- R410A is an HFC refrigerant which does not damage the ozone layer. It is an energy efficient and environmentally friendly refrigerant.
- R410A is non-toxic and is a "non-flammable refrigerant". The composition structure of R410A is not easy to change and very stable.



### RoHS Certification

- The TCL mini VRF unit meets the RoHS environmental certification, which is environmental friendly.



## 7.4 Beautiful Appearance, Upgraded Structure Design

### Simple and elegant appearance

#### The top panel

No screw design to get high-quality structure and improve the strength, more beautiful

#### The front panel

Double 528mm wind wheel, larger air volume and lower noise.

#### Grille

Grille adopts DOE simulation design, air volume increased more than 7%

#### Footing

High strength foundation with rust - proof, corrosion - proof, more stable and reliable.

#### Right front side plate

Mold forming and integrated design to make sure the strength of the panel

#### Lifting handle

Upgraded handle design, easy to carry

#### Right back plate

The mold is integrally formed and the new designed diffuser improves the heat exchange efficiency.

#### Seal plate

Ensure simple pipe connection.



### Three side direction pipe connection

- The front, side and back of the unit are designed with knock-out holes, copper pipes can be connected from various directions, which is more convenient to do the installation.



Sealing plate is combined with knock-out plate  
Three side pipe connection design  
Different installation options





## 7.5 Mini VRF Parameters



10 -12kW



14 -16kW



12-18 KW



22.4-28 KW

Model			TMV-Vd080W/N1-D(E)	TMV-Vd100W/N1-D(E)	TMV-Vd120W/N1-D(E)	TMV-Vd140W/N1-D(E)	TMV-Vd160W/N1-D(E)
Cooling capacity	Capacity	Btu/h	27000	34000	41000	49000	54000
	Capacity	kW	8.0	10.0	12.0	14.5	16.0
	Input	kW	2.55	2.75	3.05	4.10	4.80
	Current	A	11.6	12.5	13.9	18.6	21.8
	EER	Btu/(W·h)	10.6	12.4	13.4	12.0	11.3
Heating capacity	EER	W/W	3.14	3.64	3.93	3.54	3.33
	Capacity	Btu/h	34000	42000	48000	54000	61000
	Capacity	kW	10.0	12.0	14.0	16.0	18.0
	Input	kW	2.85	3.05	3.35	3.80	4.70
	Current	A	13.0	13.9	15.3	17.3	21.4
Outdoor noise level (sound power level)	COP	W/W	3.51	3.93	4.18	4.21	3.83
Refrigerant type/Quantity	Type		R410A	R410A	R410A	R410A	R410A
	Charged volume	kg	2.3	2.3	2.3	3.7	3.7
Design pressure		MPa	4.5/1.5	4.5/1.5	4.5/1.5	4.5/1.5	4.5/1.5
Power supply			220-240V ~ 50/60Hz	220-240V ~ 50/60Hz	220-240V ~ 50/60Hz	220-240V ~ 50/60Hz	220-240V ~ 50/60Hz
Voltage Range		V	198-264V	198-264V	198-264V	198-264V	198-264V
Max. Power		kW	6.2	6.2	6.2	7.26	7.26
Max. Current		A	28.2	28.2	28.2	33.0	33.0
Compressor	Model		GTD226UKPA8LT6C	GTD226UKPA8LT6C	GTD226UKPA8LT6C	GTH420SKPC8DQ	GTD226UKPA8LT6C
	Type		Rotary compressor	Rotary compressor	Rotary compressor	Rotary compressor	Rotary compressor
	Brand		HIGHLY	HIGHLY	HIGHLY	HIGHLY	HIGHLY
	Freg. Range	hz	15~120	15~120	15~120	15~120	15~120
	Crankshaft heating belt	W	20	20	20	30	30
Outdoor fan motor	Model		ZW511B500037	ZW511B500037	ZW511B500037	ZW511D000017	ZW511D000017
	Type		DC motor	DC motor	DC motor	DC motor	DC motor
	Qty		1	1	1	1	1
	Output	W	85	85	85	200	200
	Speed(Hi/Med/Lo)	r/min	850	850	850	700	700
Fan	Material		ASG20	ASG20	ASG20	ASG20	ASG20
	Type		Axial 550mm	Axial 550mm	Axial 550mm	Axial 600mm	Axial 600mm
	Drive mode		Direct drive	Direct drive	Direct drive	Direct drive	Direct drive
	Qty.		1	1	1	1	1
	Air volume	m³/h	4300	4300	4300	5300	5300
Outdoor coil	Dimm of u-tube	φ	φ 7	φ 7	φ 7	φ 7	φ 7
	Tube pitch(a)*	mm	21	21	21	21	21
	Fin spacing	mm	1.4	1.4	1.4	1.5	1.5
	Fin type		Corrugated fin	Corrugated fin	Corrugated fin	Corrugated fin	Corrugated fin
	Coil length * height * width	mm	994 × 756 × 36.4	994 × 756 × 36.4	994 × 756 × 36.4	1112 × 798 × 36.4	1112 × 798 × 36.4
Connecting Pipe	Liquid	mm	3/8"	3/8"	3/8"	3/8"	3/8"
	Gas	mm	5/8"	5/8"	5/8"	5/8"	5/8"
Max. height drop (high head)		m	20(20)	20(20)	20(20)	20(20)	20(20)
Max. length of connecting indoor unit		m	50	50	50	50	50
Max. length of connecting pipe		m	35	35	35	35	35
Net dimensions (W x H x D)	Outdoor	mm	910 × 803 × 359	910 × 803 × 359	910 × 803 × 359	1010 × 850 × 410	1010 × 850 × 410
Net weight	Outdoor	kg	52	52	52	75	75
Packing dimensions (W x H x D)	Outdoor	mm	1022 × 835 × 480	1022 × 835 × 480	1022 × 835 × 480	1145 × 970 × 535	1145 × 970 × 535
Gross weight	Outdoor	kg	55	55	55	87	87
Cooling operating range	Outdoor side	℃	-5~56	-5~56	-5~56	-5~56	-5~56
	Indoor side	℃	16~32	16~32	16~32	16~32	16~32
Heating operating range	Outdoor side	℃	-25~28	-25~28	-25~28	-25~28	-25~28
	Indoor side	℃	15~31	15~31	15~31	15~31	15~31

**Notes:** 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.

5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.

Model			TMV-Vd120W/N1-C(E)(C2)	TMV-Vd140W/N1-C(E)(C2)	TMV-Vd160W/N1-C(E)(C2)	TMV-Vd180W/N1-C(E)(C2)	TMV-Vd224W/N1S(E)	TMV-Vd252W/N1S(E)	TMV-Vd280W/N1S(E)
Cooling capacity	Capacity	Btu/h(W)	42000(12000)	48000(14000)	54000(16000)	61400(18000)	76400 (22400)	86000 (25200)	95500 (28000)
	Input	W	3000	3600	4350	5250	7200	8250	9100
	Current	A	13.6	16.4	20.8	24.2	11.5	13.2	14.6
	EER	W/W	4.00	3.89	3.68	3.43	3.11	3.05	3.08
Heating capacity	Capacity	Btu/h(W)	47600(14000)	54400(16000)	61400(18000)	68240(20000)	83600 (24500)	92000 (27000)	105000 (30800)
	Input	W	3300	4000	4650	5200	7100	8500	9500
	Current	A	15.5	18.2	23.4	23.5	11.4	13.6	15.2
Outdoor noise level(sound power level)	COP	W/W	4.24	4.00	3.87	3.85	3.45	3.18	3.24
Outdoor noise level(sound power level)		dB(A)	52	53	54	55	60	60	61
Refrigerant type/Quantity	Type		R410A	R410A	R410A	R410A	R410A	R410A	R410A
	Charged volume	kg	4	4	4.3	5.6	6.5	6.5	8.5
Design pressure		MPa	4.3/1.5	4.3/1.5	4.3/1.5	4.3/1.5	4.5/1.5	4.5/1.5	4.5/1.5
Power supply			220-240V~/50/60Hz	220-240V~/50/60Hz	220-240V~/50/60Hz	220-240V~/50/60Hz	380V~3N/50Hz/60Hz	380V~3N/50Hz/60Hz	380V~3N/50Hz/60Hz
Voltage Range		V	187~253	187~253	187~253	187~253	323~437	323~437	323~437
Max. Power		W	6000	6000	6900	7200	11000	11500	12000
Max. Current		A	27.8	27.8	31.4	33	17.6	18.5	19.2
Compressor	Type								
	Freg. Range	rps	15~120	15~121	15~122	15~123	20~100	20~100	20~100
	Oil		RMM68EA	RMM68EA	HAF68D1C	HAF68D1C	FVC50S	FVC50S	FVC50S
Outdoor fan motor	Type		DC motor	DC motor	DC motor	DC motor	Inverter motor	Inverter motor	Inverter motor
	Qty		2	2	2	2	2	2	2
	Output	W	85 × 2	85 × 2	85 × 2	85 × 2	160x2	160x2	160x2
	Speed(Hi/Med/Lo)	r/min	850	850	850	850	860	860	860
Connecting Pipe	Liquid	Inches	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
	Gas	Inches	3/4"	3/4"	3/4"	3/4"	7/8"(22.2)	7/8"(22.2)	7/8"(22.2)
Max. height drop		m	30(20)	30(20)	30(20)	30(20)	30(20)	30(20)	30(20)
Max. length of connecting pipe		m	120	120	120	120	120	120	120
Net dimensions (W x H x D)	Outdoor	mm	950 × 1330 × 340				1120 × 1560 × 400		
Net weight	Outdoor	kg	91	91	94	99	140	140	145
Packing dimensions (W x H x D)	Outdoor	mm	1080 × 1380 × 430	1080 × 1380 × 431	1080 × 1380 × 432	1080 × 1380 × 433	1250 × 1721 × 560		
Gross weight	Outdoor	kg	102	102	105	110	163	163	168

**Notes:** 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.

5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.

IDU lineup



IDU lineup

Series	Type	Model	Capacity range(x100w)																									
			18	22	25	28	32	36	40	45	50	56	63	71	80	90	100	112	125	140	160	220	224	280	335	450	560	
 360° air outlet cassette	Cooling & Heating	TMV6-V(**) Q8/N1Y(E)				●		●		●	●	●	●	●	●	●	●	●	●	●								
 DC inverter slim duct	Cooling & Heating	TMV6-V(**) F5/N1DY(E)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●									
 Medium static pressure duct	Cooling & Heating	TMV6-V(**) F2/N1(S) Y(E)									●	●	●	●	●	●	●	●	●	●	●							
 High static pressure duct	Cooling & Heating	TMV6-V(**) F1/N1Y(E)												●	●	●	●	●	●		●		●		●	●		
 Wall-mounted	Cooling & Heating	TMV6-V(**) G/N1Y-B(E)		●		●		●		●	●	●		●														
 Ceilinging & Floor	Cooling & Heating	TMV6-V(**) ZD/N1Y(E)												●	●	●	●		●	●								
 One-way cassette	Cooling & Heating	TMV6-V(**) Q1/N1Y(E)	●	●		●		●		●	●	●																
 Two-way cassette	Cooling & Heating	TMV6-V(**) Q2/N1Y(E)		●		●		●		●	●	●	●	●														
 Fresh air duct	Cooling & Heating	TMV6-V(**) F1/XFN1Y(E)																		●				●		●	●	
Air Volume (m³/h)																												
 ERV	Cooling & Heating	XFQR-** Q-D/-DS	200	300	400	500	600	1000	1500	2000	2500	3000	4000	5000	6000	8000	10000	12000	16000									





## 360° Air-outlet Cassette



### Recommended places

Office, restaurant, supermarket, shopping mall, lobby, etc

### Technical characteristics



#### New panel design

Adopt the new design of "porcelain white" color, beautiful and generous, so that the indoor machine panel and the ceiling color more easily integrated, more noble, surround type air supply panel, air supply more comfortable.



#### Large Air Outlet Volume

Through the new DC inverter fan motor, achieve 2100m<sup>3</sup>/h air outlet volume, and improve the air Exchange efficiency by 30%




#### 50Pa Static Pressure Adjustment

Build-in 4 gear static pressure, 0~50Pa can be adjusted, to achieve the 4m long air outlet distance



#### 7-level Fan Speed Volume

Thin fuselage, the installation space required is small, the unit can be easily installed in a fairly narrow ceiling.



#### Standard condensate pump, easy to install

Equipped with advanced high-lift condensate drainage pump, the maximum head up to 1200mm, easy to install drainpipes.



#### 360° wide-angle air supply

Comfortable air supply does not leave dead corner, every corner can enjoy cool; Uniform air supply, reduce the temperature difference, keep the indoor temperature comfortable; Air supply is no longer directed single, keep air circulation, air more fresh and healthy.



#### Clean sterilization, healthy life

Standard health filter screen, effectively remove large particles in the air, optional silver ion purification module, adsorption of formaldehyde and odor, eliminate germs.



#### DC inverter fan motor technology

Adoption DC inverter motor technology, to improve the running efficiency by 15% and reduce the operation noise (min 31dB)



#### Ultra low noise

Using the advanced technology of three-dimensional spiral blade design, can reduce the air resistance, realize the machine low noise operation, "quiet" enjoy a comfortable life.



#### Standard float switch, timely warning

Standard float switch, when the condensate pump is faulty or the drainpipe is blocked, timely warning, prevent the water tray inside the machine overflow.

## 360° Air-outlet Cassette

### Specification

Model			TMV-V28Q8/ N1DY(E)	TMV-V36Q8/ N1DY(E)	TMV-V45Q8/ N1DY(E)	TMV-V50Q8/ N1DY(E)	TMV-V56Q8/ N1DY(E)	TMV-V63Q8/ N1DY(E)	TMV-V71Q8/ N1DY(E)
Capacity	Cooling capacity	kW	2.8	3.6	4.5	5.0	5.6	6.3	7.1
	Heating capacity	kW	3.2	4.0	5.0	5.6	6.3	7.1	8.0
Power	Cooling power	kW	0.020	0.020	0.025	0.025	0.025	0.035	0.035
	Heating power	kW	0.020	0.020	0.025	0.025	0.025	0.035	0.035
Power supply			220V ~ 1N 50Hz						
Current	Cooling current	A	0.09	0.09	0.11	0.11	0.11	0.16	0.16
	Heating current	A	0.09	0.09	0.11	0.11	0.11	0.16	0.16
Fan	air volume	m³/h	800	800	900	900	900	1100	1100
External static pressure		Pa	0	0	0	0	0	0	0
Noise		dB(A)	31	31	33	33	33	35	37
Connecting pipe diameter	gas pipe	mm	12.7					15.88	
	liquid tube	mm	6.35					9.52	
	Connection mode	/	Threaded connection						
Net dimension(L×W×H)		mm	840×840×245						
Weight	Net weight	kg	21.5	21.5	21.5	21.5	21.5	22.0	22.0
Panel	Panel size	mm	950×950×50						
	Net weight	kg	6						
Panel	Unit (W×H×D)	mm	950×45×950						
	Packing (W×H×D)	mm	1035×90×1035						
	Net/Gross	kg	6/9						
Drainage pipe diameter			DN32						
Electric control mode			Remote Controller & Wired controller						

Model			TMV-V80Q8/ N1DY(E)	TMV-V90Q8/ N1DY(E)	TMV-V100Q8/ N1DY(E)	TMV-V112Q8/ N1DY(E)	TMV-V125Q8/ N1DY(E)	TMV-V140Q8/ N1DY(E)	TMV-V160Q8/ N1DY(E)
Capacity	Cooling capacity	kW	8.0	9.0	10.0	11.2	12.5	14.0	16.0
	Heating capacity	kW	9.0	10.0	11.2	12.5	14.0	16.0	18.0
Power	Cooling power	kW	0.040	0.060	0.060	0.060	0.070	0.085	0.132
	Heating power	kW	0.040	0.060	0.060	0.060	0.070	0.085	0.132
Power supply									
Current	Cooling current	A	0.18	0.27	0.27	0.27	0.32	0.39	0.60
	Heating current	A	0.18	0.27	0.27	0.27	0.32	0.39	0.60
Fan	air volume	m <sup>3</sup> /h	1300	1500	1600	1600	1800	1800	2100
External static pressure		Pa	0	0	0	0	0	0	0
Noise		dB(A)	38	39	40	41	43	43	47
Connecting pipe diameter	gas pipe	mm	15.88						
	liquid tube	mm	9.52						
	Connection mode	/	Threaded connection						
Net dimension(L×W×H)		mm	840×840×245				840×840×290		
Weight	Net weight	kg	22	22.5	25	25	25	27.5	27.5
	Panel size	mm	950×950×50						
Panel	Net weight	kg	6						
	Unit (W×H×D)	mm	950×45×950						
Panel	Packing (W×H×D)	mm	1035×90×1035						
	Net/Gross	kg	6/9						
Drainage pipe diameter			DN32						
Electric control mode			Remote Controller & Wired controller						

Notes: 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.

5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.



## DC Inverter Slim Duct



### Recommended places


Office, conference room, hotel room, restaurant, living room, etc

### Technical characteristics



#### Constant air volume

Fan motor automatically adjusts speed according to real-time wind resistance. To provide stable air volume to rooms.

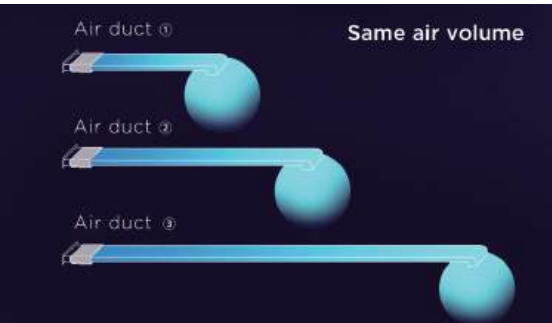

#### Ultra-thin body design, fashion and beautiful

The minimum height of the body is only 200mm, saving space. The drain pump can lift the condensing water up to 1200mm.



#### Health filter (optional)

The duct can be equipped with silver ion and activated carbon health filter.



#### High ESP

ESP up to 80Pa supports longer air duct and fits with more installation scenario.



#### Dc seven speed wind speed Energy-saving silent operation

DC motor, 7-speed air volume, energy-saving and silent operation. The lowest noise is 20 d B(A).




#### Standard float switch, timely warning

Standard float switch, when the condensate pump is faulty or the drainpipe is blocked, timely warning, prevent the water tray inside the machine overflow.



#### 7-level Fan Speed Volume

Thin fuselage, the installation space required is small, the unit can be easily installed in a fairly narrow ceiling.



## DC Inverter Slim Duct

### Specification

Model			TMV-V18 F5/N1DY(E)	TMV-V22 F5/N1DY(E)	TMV-V25 F5/N1DY(E)	TMV-V28 F5/N1DY(E)	TMV-V32 F5/N1DY(E)	TMV-V36 F5/N1DY(E)	TMV-V40 F5/N1DY(E)	TMV-V45 F5/N1DY(E)	TMV-V50 F5/N1DY(E)	TMV-V56 F5/N1DY(E)
Capacity	Cooling capacity	kW	1.8	2.2	2.5	2.8	3.2	3.6	4.0	4.5	5.0	5.6
	Heating capacity	kW	2.2	2.5	2.8	3.2	3.6	4.0	4.5	5.0	5.6	6.3
Power	Cooling power	kW	0.02	0.02	0.02	0.02	0.03	0.03	0.05	0.05	0.05	0.05
	Heating power	kW	0.02	0.02	0.02	0.02	0.03	0.03	0.05	0.05	0.05	0.05
Power supply			220V 1N~50Hz									
Current	Cooling current	A	0.09	0.09	0.09	0.09	0.14	0.14	0.23	0.23	0.23	0.23
	Heating current	A	0.09	0.09	0.09	0.09	0.14	0.14	0.23	0.23	0.23	0.23
Fan	air volume	m <sup>3</sup> /h	500	500	500	500	550	550	850	850	850	850
External static pressure		Pa	20(0 ~ 50)	20(0 ~ 50)	20(0 ~ 50)	20(0 ~ 50)	20(0 ~ 50)	20(0 ~ 50)	20(0 ~ 50)	20(0 ~ 50)	20(0 ~ 50)	20(0 ~ 50)
Noise H/M/L		dB(A)	30/26/20	30/26/20	30/26/20	30/26/20	30/26/22	30/26/22	34/29/24	34/29/24	34/29/24	34/29/24
Net dimension (L×W×H)	Net dimensions	mm	700×450×200						920×450×200			
	Size of return air inlet	mm	570×172						790×172			
	Air outlet size	mm	510×140						730×140			
Net weight		kg	14.5	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0
Connecting pipe diameter	gas pipe	mm	9.52	9.52	9.52	9.52	12.70	12.70	12.70	12.70	12.70	12.70
	liquid tube	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35
	Connection mode	/	Threaded connection									
Drainage pipe diameter		mm	DN25									
Electric control mode		/	Remote Controller & Wired controller									

Model			TMV-V63 F5/N1DY(E)	TMV-V71 F5/N1DY(E)	TMV-V80 F5/N1DY(E)	TMV-V90 F5/N1DY(E)	TMV-V100 F5/N1DY(E)	TMV-V112 F5/N1DY(E)	TMV-V125 F5/N1DY(E)	TMV-V140 F5/N1DY(E)
Capacity	Cooling capacity	kW	6.3	7.1	8.0	9.0	10.0	11.2	12.5	14.0
	Heating capacity	kW	7.1	8.0	9.0	10.0	11.2	12.5	14.0	16.0
Power	Cooling power	kW	0.054	0.054	0.054	0.180	0.180	0.180	0.250	0.250
	Heating power	kW	0.054	0.054	0.054	0.180	0.180	0.180	0.250	0.250
Power supply			220V 1N~50Hz							
Current	Cooling current	A	0.25	0.25	0.25	0.90	0.90	0.90	1.20	1.20
	Heating current	A	0.25	0.25	0.25	0.90	0.90	0.90	1.20	1.20
Fan	air volume	m <sup>3</sup> /h	1100	1100	1100	1800	1800	1800	2000	2000
External static pressure		Pa	20(0 ~ 80)	20(0 ~ 80)	20(0 ~ 80)	60(30 ~ 80)	60(30 ~ 80)	60(30 ~ 80)	60(30 ~ 80)	60(30 ~ 80)
Noise H/M/L		dB(A)	37/31/27	37/31/27	37/31/27	43/37/33	43/37/33	43/37/33	44/41/37	44/41/37
Net dimension (L×W×H)	Net dimensions	mm	1100×450×200				1400×700×250			
	Size of return air inlet	mm	1004×165				1365×220			
	Air outlet size	mm	930×140				1365×175			
Net weight		kg	21.5	21.5	21.5	35.5	35.5	35.5	37.5	37.5
Connecting pipe diameter	gas pipe	mm	15.88	15.88	15.88	15.88	15.88	15.88	15.88	15.88
	liquid tube	mm	9.52	9.52	9.52	9.52	9.52	9.52	9.52	9.52
	Connection mode	/	Threaded connection							
Drainage pipe diameter		mm	DN25							
Electric control mode		/	Remote Controller & Wired controller							


Notes: 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.

5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart (optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.





## Medium Static Pressure Duct

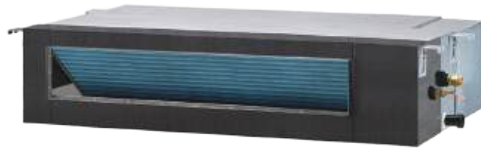

### Recommended places

Office, conference room, exhibition hall, restaurant, etc

### Technical characteristics



#### Flexible to adapt to a variety of room structure

It is optional to have air inlet form back or bottom with the same size of plate ,which will be very flexible and convenient for installation.



#### Built-in drain pump(optional).

The drain pump can lift the condensing water up to 1200mm.



#### Ultra-thin body design, fashion and beautiful

The minimum height of the body is only 200mm, saving space.



#### Personalized tuyere

Suitable tuyere can be assembled to make the air conditioning decoration style perfect integration, highlighting the taste of the room.



#### Flexible installation

The factory standard bellows, according to the installation needs, can be adjusted on site under or after the return air, to meet the needs of different installation sites.

### Specification

Model		TMV-V45F2/N1Y(E)	TMV-V50F2/N1Y(E)	TMV-V56F2/N1Y(E)	TMV-V63F2/N1Y(E)	TMV-V71F2/N1Y(E)	TMV-V80F2/N1Y(E)	TMV-V90F2/N1Y(E)	TMV-V100F2/N1Y(E)	TMV-V112F2/N1Y(E)	TMV-V125F2/N1Y(E)	TMV-V140F2/N1Y(E)	TMV-V160F2/N1Y(E)
Static pressure	Standard	Pa	15	15	15	30	30	30	50	50	50	50	50
	Range	Pa	0~30	0~30	0~30	20~50	20~50	20~50	30~80	30~80	30~80	30~100	30~100
Cooling capacity	Capacity	Btu/h(W)	15000(4500)	17000(5000)	19000(5600)	21000(6300)	24000(7100)	27000(8000)	30000(9000)	34000(10000)	38000(11200)	42000(12500)	48000(14000)
	Input	W	110	110	110	160	160	160	330	330	330	390	390
Heating capacity	Capacity	Btu/h(W)	17000(5000)	19000(5600)	21000(6300)	24000(7100)	27000(8000)	30000(9000)	34000(10000)	38000(11200)	42000(12500)	48000(14000)	55000(16000)
	Input	W	110	110	110	160	160	160	330	330	330	390	390
Noise	H/M/L	dB(A)	43/33/30	43/33/30	43/33/30	46/37/35	46/37/35	46/37/35	50/44/41	50/44/41	50/44/41	54/46/43	54/46/43
Design pressure	MPa	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
Power supply		220-240V~/50Hz/60Hz											
Indoor air circulation (Cooling/Heating)	L/S	250	250	250	306	306	306	472	472	472	611	611	611
	m³/h	900	900	900	1100	1100	1100	1700	1700	1700	2200	2200	2200
Connecting Pipe	Liquid	Inches	1/4"	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
	Gas	Inches	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	5/8"	5/8"	5/8"	5/8"	5/8"
Drainage Pipe	mm	25(ID20,OD25)											
Net dimensions	W x H x D	mm	920×210×570				1140×270×710				1200×300×800		
Net weight	kg	23	23	23	26	26	26	36	36	36	46	46	46
Packing dimensions	W x H x D	mm	1115×280×690				1345×360×830				1405×390×925		
Gross weight	kg	27	27	27	31	31	31	41	41	41	51	51	51
Loading Capacity		1.5HP	1.8HP	2.0HP	2.2HP	2.5HP	3.0HP	3.2HP	3.6HP	4.0HP	4.5HP	5.0HP	5.5HP
Controller		Remote Controller & Wired controller											

Notes: 1. Specifications are based on the following conditions:

- Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.
- Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.
- Equivalent piping length:5m; Level difference:0m; Voltage:230V.

5. Sound Level: Indoor unit sound pressure level,measured at a point 1.5m downward from the unit center.

6. Outdoor unit sound pressure level,measured at a point 1.0m in front of the unit.

7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer:only one circle.

8. Due to ongoing product development, specifications are subject to change without notice.

## High Static Pressure Duct



### Recommended places

Workshop, hotel, restaurant, shopping mall, ballroom, bar and other large space places

### Technical characteristics



#### Healthy new wind, forest breathing

Easy introduction of outdoor fresh air heating refrigeration and indoor air exchange, keep indoor air fresh, bring you comfortable fresh air.



#### Ultra-thin body design, fashion and beautiful

The minimum thickness of the fuselage is only 380mm, which does not occupy indoor space.



#### Ultra-high static pressure design to meet various space requirements

Maximum static pressure 300Pa, can be long distance multi-point air supply, fully meet the air conditioning needs of different Spaces.



#### Clean sterilization, healthy life

Built-in coarse filter, PP filter screen, optional silver ion purification module, effectively remove large particles in the air, absorb formaldehyde and odor, eliminate germs.



#### Various forms of air outlets,matching with decoration

The indoor unit adopts a hidden installation mode, which can be equipped with appropriate air outlets to perfectly combine the air conditioning.



### Specification

Model			TMV-V71F1/N1Y(E)	TMV-V80F1/N1Y(E)	TMV-V90F1/N1Y(E)	TMV-V100F1/N1Y(E)	TMV-V112F1/N1Y(E)	TMV-V140F1/N1Y(E)	TMV-V220F1/N1Y	TMV-V280F1/N1Y	TMV-V450F1/N1Y	TMV-V560F1/N1Y
Static pressure	Standard	Pa	100	100	100	100	100	130	200	200	200	200
	Range	Pa	50 ~ 130	50~130	50~130	50~130	50 ~ 130	50 ~ 130	100~300	100~300	100~300	100~300
Cooling capacity	Capacity	Btu/h(W)	24000(7100)	27000(8000)	30000(9000)	34000(10000)	38000(11200)	48000(14000)	75000(22000)	95500(28000)	153500(45000)	191100(56000)
	Input	W	280	280	420	420	420	420	1750	1750	2250	2250
Heating capacity	Capacity	Btu/h(W)	27000(8000)	30000(9000)	34000(10000)	38000(11200)	42000(12500)	55000(16000)	85300(25000)	105772(31000)	170600(50000)	208132(61000)
	Input	W	280	280	420	420	420	420	1750	1750	2250	2250
Noise	H/M/L	dB(A)	50/48/46	50/48/46	53/51/49	53/51/49	53/51/49	53/51/49	55/53/51	55/53/51	61/58/56	61/58/56
Design pressure		MPa	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
Power supply			220-240V~/50Hz/60Hz									
Indoor air circulation (Cooling/Heating)		L/S	350	350	517	517	561	639	1250	1250	2083	2083
		m³/h	1260	1260	1860	1860	2020	2300	4500	4500	7500	7500
Connecting Pipe	Liquid	Inches	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	12.7mm	12.7mm	12.7mm	12.7mm
	Gas	Inches	5/8"	5/8"	5/8"	5/8"	5/8"	5/8"	22.2mm	22.2mm	28.6mm	28.6mm
Drainage Pipe		mm	25(ID20,OD25)						DN25			
Net dimensions	W x H x D	mm	850×380×590			1200×380×590			1366×758×470		1770×758×650	
Net weight		kg	49	49	58	58	58	58	120		220	
Packing dimensions	W x H x D	mm	1060×425×695			1410×435×695			1620×975×700		2010×975×910	
Gross weight		kg	55	55	64	64	64	64	145		245	
Loading Capacity			2.5HP	3.0HP	3.2HP	3.6HP	4.0HP	5.0HP	8.0HP	10.0HP	16.0HP	20.0HP
Controller			Remote Controller & Wired controller									

Notes: 1. Specifications are based on the following conditions:

- Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.
- Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.
- Equivalent piping length:5m; Level difference:0m; Voltage:230V.

5. Sound Level: Indoor unit sound pressure level,measured at a point 1.5m downward from the unit center.

6. Outdoor unit sound pressure level,measured at a point 1.0m in front of the unit.

7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer:only one circle.

8. Due to ongoing product development, specifications are subject to change without notice.



## Wall-mounted



### Recommended places

Living room, study, reference room, negotiation room and other places

### Technical characteristics



#### Ultra-low silent operation

Adopt large-diameter blade, high-quality plastic-encapsulated motor, and the noise is as low as 27dB(A).



#### Ultra-thin body design, smart and beautiful

The minimum thickness of the unit is only 380mm, which makes installation more convenient.



#### Easy maintenance

The horizontal baffle of the unit is easy to remove for easy cleaning and maintenance.



#### Long-lasting filter design

The long-term filter design makes the air more healthy, reduces the difficulty of maintenance.



#### Wide-angle air supply, more comfortable

The upper and lower wind guide vanes make the airflow comfortable.



### Specification

Model			TMV-V22G/ N1Y-B(E)	TMV-V28G/ N1Y-B(E)	TMV-V36G/ N1Y-B(E)	TMV-V45G/ N1Y-B(E)	TMV-V50G/ N1Y-B(E)	TMV-V56G/ N1Y-B(E)	TMV-V71G/ N1Y-B(E)	TMV-V80G/ N1Y-B(E)
Cooling capacity	Capacity	Btu/h(W)	7500(2200)	10000(2800)	12000(3600)	15000(4500)	17000(5000)	19000(5600)	24000(7100)	27000(8000)
	Input	W	40	40	40	45	45	70	70	70
Heating capacity	Capacity	Btu/h(W)	9000(2500)	11000(3200)	14000(4000)	17000(5000)	19000(5600)	21000(6300)	27000(8000)	30000(9000)
	Input	W	40	40	40	45	45	70	70	70
Noise	H/M/L	dB(A)	38/33/27	38/33/27	38/33/27	42/37/33	42/37/33	44/39/35	44/39/35	44/39/35
Design pressure		MPa	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
Power supply			220-240V~/50Hz 208-230V~/60Hz	220-240V~/50Hz 208-230V~/60Hz	220-240V~/50Hz 208-230V~/60Hz	220-240V~/50Hz 208-230V~/60Hz	220-240V~/50Hz 208-230V~/60Hz	220-240V~/50Hz 208-230V~/60Hz	220-240V~/50Hz 208-230V~/60Hz	220-240V~/50Hz 208-230V~/60Hz
Indoor air circulation(Cooling/Heating)		L/S	153	153	153	181	181	222	222	222
		m³/h	550	550	550	650	650	800	800	800
Connecting Pipe	Liquid	Inches	1/4"	1/4"	1/4"	1/4"	1/4"	3/8"	3/8"	3/8"
	Gas	Inches	1/2"	1/2"	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"
Drainage Pipe		mm	16	16	16	16	16	16	16	16
Net dimensions	(W×H×D)	mm	910×294×206	910×294×206	910×294×206	910×294×206	910×294×206	1010×315×220	1010×315×220	1010×315×220
Net weight	Indoor	kg	10	10	10	10	10	13	13	13
Packing dimensions	(W×H×D)	mm	977×367×276	977×367×276	977×367×276	977×367×276	977×367×276	1094×386×300	1094×386×300	1094×386×300
Gross weight		kg	12.5	12.5	12.5	12.5	12.5	16	16	16
Loading Capacity			0.9HP	1.0HP	1.2HP	1.5HP	1.8HP	2.0HP	2.0HP	2.0HP
Controller			Remote Controller & Wired controller							

Notes: 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.

5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.

## Ceiling & floor



### Recommended places

Living room, study, reference room, negotiation room and other places

### Technical characteristics



#### Ultra-thin Design

Compact design which fits for various room styles.



#### Wide Range of Air Flow

The air supply angle is from 0 to 110°, making the indoor temperature more uniform and more comfortable.



#### Dual Direction of Drainage

Condensing water can be drained both from left and right side.



#### Detachable Plastic Blowers

Universal design ned parts and assemblies applied, which is easy for maintenance.



#### Flexible Installation

Two ways of installation available, ceiling suspended and floor standing.



#### Wire Control (optional)

Wire control is available, especially for hotel rooms, offices, etc.

### Specification

Model			TMV-V45ZD/ N1Y(E)	TMV-V50ZD/ N1Y(E)	TMV-V56ZD/ N1Y(E)	TMV-V63ZD/ N1Y(E)	TMV-V71ZD/ N1Y(E)	TMV-V80ZD/ N1Y(E)	TMV-V90ZD/ N1Y(E)	TMV-V100ZD/ N1Y(E)	TMV-V1125ZD/ N1Y(E)	TMV-V125ZD/ N1Y(E)	TMV-V140ZD/ N1Y(E)
Cooling capacity	Capacity	Btu/h (W)	15000 (4500)	17000 (5000)	19000 (5600)	21000 (6300)	24000 (7100)	27000 (8000)	30000 (9000)	34000 (10000)	38000 (11200)	42000 (12500)	48000 (14000)
	Input	W	102	102	102	149	149	149	158	158	235	235	235
Heating capacity	Capacity	Btu/h (W)	17000 (5000)	19000 (5600)	21000 (6300)	24000 (7100)	27000 (8000)	30000 (9000)	34000 (10000)	38000 (11200)	42000 (12500)	48000 (14000)	55000 (16000)
	Input	W	102	102	102	149	149	149	158	158	235	235	235
Noise	H/M/L	dB(A)	44/42/39	44/42/39	44/42/39	46/44/41	46/44/41	46/44/41	50/48/45	50/48/45	52/50/47	52/50/47	52/50/47
Design pressure		MPa	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
Power supply			220-240V~/50Hz/										
Indoor air circulation (Cooling/Heating)		L/S	267	267	267	333	333	333	444	444	556	556	556
		m³/h	960	960	960	1200	1200	1200	1600	1600	2000	2000	2000
Connecting Pipe	Liquid	Inches	1/4"	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
	Gas	Inches	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	5/8"	5/8"	5/8"	5/8"	5/8"
Drainage Pipe		mm	25(ID20, OD25)										
Net dimensions	W x H x D	mm	1055×675×235							1275×675×235		1635×675×235	
Net weight		kg	24	24	24	25	25	25	29	29	38	38	38
Packing dimensions	W x H x D	mm	1131×753×313							1351×753×313		1711×753×313	
Gross weight		kg	27	27	27	28	28	28	35	35	46	46	46
Loading Capacity			1.5HP	1.8HP	2.0HP	2.2HP	2.5HP	3.0HP	3.2HP	3.6HP	4.0HP	4.5HP	5.0HP
Controller			Remote Controller & Wired controller										

Notes: 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.

5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.





## One-way Cassette



## Recommended places

Living room, dining room, office, lobby, etc

## Technical characteristics



## High-lift Drain Pump

The drain pump with a 700mm lifting head which is as standard, simplifying installation of the drain pipes.



## Standard float switch, real-time monitor water level

Equipped with float switch, which will automatically monitor the water level and send alarm when malfunction of drain pump or stuck of drain pipe occurs.



## Wide-angle air flow

Adopting new type of swing motor, which largely increases the angle of air flow.



## High ceiling design

Reserves a super high fan speed for high ceiling installation, unit can provide powerful cooling and heating under a more than 3 meters floor height.



## Slim body

Super slim body with 235mm thickness, less installation area required, capable to match multiple decoration styles.




## Suitable for corner installation, comfortable air flow

Well-designed shape, suitable for corner installation, make sure the air flow and temperature distribution well.



## Three level fan speeds

High,Mid,Low three fan speed options, can meet the needs of different indoor condition.



## IDU parameters

Capacity	HP		TMV-V18Q1/N1Y(E)	TMV-V22Q1/N1Y(E)	TMV-V28Q1/N1Y(E)	TMV-V36Q1/N1Y(E)	TMV-V45Q1/N1Y(E)	TMV-V50Q1/N1Y(E)	TMV-V56Q1/N1Y(E)
	Cooling	kW	1.8	2.2	2.8	3.6	4.5	5	5.6
Power input	Heating	kW	2.2	2.8	3.2	4	5	5.6	6.3
	Cooling	kW	0.05	0.05	0.05	0.06	0.07	0.07	0.07
Power supply	Heating	kW	0.05	0.05	0.05	0.06	0.07	0.07	0.07
	220V ~ 1N 50Hz								
Current	Cooling	A	0.24	0.24	0.24	0.28	0.31	0.31	0.31
	Heating	A	0.24	0.24	0.24	0.28	0.31	0.31	0.31
Air volume	m <sup>3</sup> /h		510	510	510	680	800	800	800
Noise	H/M/L	dB(A)	39/34/31	39/34/31	39/34/31	40/34/31	42/36/33	42/36/33	42/36/33
Dimension	panel	mm	580×1055	580×1055	580×1055	580×1055	580×1055	580×1055	580×1055
	unit	mm	850×480×235	850×480×235	850×480×235	850×480×235	850×480×235	850×480×235	850×480×235
	packing	mm	1105×645×305	1105×645×305	1105×645×305	1105×645×305	1105×645×305	1105×645×305	1105×645×305
Weight	net	kg	23	23	23	23	23	23	23
	gross	kg	28	28	28	28	28	28	28
Connection pipe	Gas	mm	9.52	9.52	9.52	12.7	12.7	12.7	12.7
	Liquid	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35
	Connection way	Screw thread							
Water pipe dimension(mm)		φ25							
Controller		Remote/Wired/Central controller							

Notes: 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.

5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.

## Two-way Cassette



## Recommended places

Sitting room, study, dining room, small meeting room, etc

## Technical characteristics



## High-lift Drain Pump

A drain pump with a 700mm raise height is fitted as standard, simplifying installation of the drain piping.



## Standard float switch, water level monitor

Equipped with float switch, which will automatically send alarm when malfunction of drain pump or stuck of drain pipe occur.



## Three - speed adjustment

New winding motor, with scroll fan technology, wider air volume regulation, quieter operation, unique intimate wind gear design. High, medium and low three speed adjustment, strong refrigeration and heating, to create a quiet and comfortable temperature.



## Ultra-thin body, lightweight design

Ultra-thin body (290mm), requires less installation space, even in the narrow low ceiling, still can be easily installed, more flexible collocation decoration style.



## Super wide Angle air supply

Panel swing motor system adopts high-precision stepper motor, panel up and down risk control system is more intelligent, to achieve ultra-wide Angle and large range of air supply.



## Quiet design, quiet and comfortable

Centrifugal wind wheel, axial air inlet, through rotation to form a certain wind pressure, small blade area, large number, uniform air, noise greatly reduced, for you to create a quiet and comfortable environment.



## High ceiling design, direct air flow to the ground

High ceiling design, suitable for ceiling height up to 3m space.

## IDU parameters

Model	TMV-V22Q2/N1Y(E)		TMV-V28Q2/N1Y(E)		TMVd-V36Q2/N1Y(E)		TMV-V45Q2/N1Y(E)		TMV-V50Q2/N1Y(E)		TMV-V56Q2/N1Y(E)		TMV-V63Q2/N1Y(E)		TMV-V71Q2/N1Y(E)	
	Cooling(kW)	2.2	2.8	3.6	4.5	5	5.6	6.3	7.1							
Capaicyt	Heating(kW)	2.8	3.2	4	5	5.6	6.3	7.1	8							
	Cooling(kW)	0.064	0.064	0.064	0.064	0.07	0.07	0.11	0.11							
Power input	heating(kW)	0.064	0.064	0.064	0.064	0.07	0.07	0.11	0.11							
	220V ~ 1N 50Hz															
Current	Cooling(A)	0.27	0.27	0.27	0.27	0.31	0.31	0.49	0.49							
	heating(A)	0.27	0.27	0.27	0.27	0.31	0.31	0.49	0.49							
Air volume	(m <sup>3</sup> /h)	580	580	680	680	850	850	1360	1360							
Noise	H/M/L dB(A)	40/35/32	42/36/33	42/36/33	42/36/33	42/38/35	43/38/35	46/39/36	46/39/36							
Dimension	Panel(mm)	680×1240	680×1240	680×1240	680×1240	680×1240	680×1240	680×1240	680×1240							
	Body (mm)	1140×575×290	1140×575×290	1140×575×290	1140×575×290	1140×575×290	1140×575×290	1140×575×290	1140×575×290							
	Packing(mm)	1305×755×370	1305×755×370	1305×755×370	1305×755×370	1305×755×370	1305×755×370	1305×755×370	1305×755×370							
Weight	Net(kg)	32	32	32	32	33	33	34	34							
	Gross(kg)	38	38	38	38	39	39	40	40							
connection pipe	gas (mm)	12.7	12.7	12.7	12.7	12.7	12.7	15.88	15.88							
	liquid(mm)	6.35	6.35	6.35	6.35	6.35	6.35	9.52	9.52							
	connection way	Screw thread														
Drainage pipe(mm)		φ25														
Controller		Remote/Wired/Central controller														

Notes: 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.

5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.



## Fresh Air Processing Unit



**Recommended places**  
Cinemas, hotels, lobbies, dance halls, bars and other places

### Technical characteristics



**Healthy Fresh Air**  
Through the fresh air unit, the outdoor healthy air can be introduced into the room to keep the indoor healthy.



**Ultra-high static pressure design**  
The maximum static pressure is 300pa, which can meet long-distance air supply and different space requirements.



**Control Smart and Lower Cost**  
The fresh air unit can be controlled independently or connected to the same outdoor unit system with the AC indoor unit, reducing costs and installation space.



**Simplify air exhaust system**  
Simplified air supply and exhaust system, stable and reliable.

Note: The sum of the capacity of the processing unit and the indoors should be 50%~100% of the ODU capacity , and the capacity of the fresh air units does not exceed 30%.

### Specification

Model			TMV-V140F1/XFN1Y(E)	TMV-V280F1/XFN1Y(E)	TMV-V450F1/XFN1Y(E)	TMV-V560F1/XFN1Y(E)
Static pressure	Standard	Pa	196	200	300	300
Cooling capacity	Capacity	Btu/h(W)	48000(14000)	95500(28000)	153000(45000)	191000(56000)
	Input	W	420	1100	1550	2250
Heating capacity	Capacity	Btu/h(W)	34000(10000)	68000(20000)	95500(28000)	133000(39000)
	Input	W	420	1100	1550	2250
Noise	H/M/L	dB(A)	45	53	56	60
Design pressure		MPa	4.1	4.1	4.1	4.1
Power supply			220-240V~/50Hz/60Hz			
Indoor air circulation (Cooling/Heating)		L/S	569	833	1111	1667
		m³/h	2050	3000	4000	6000
Connecting Pipe	Liquid	Inches	3/8"	1/2"	1/2"	1/2"
	Gas	Inches	5/8"	1"	9/8"	9/8"
Drainage Pipe		mm	25(ID20,OD25)			
Net dimensions	W x H x D	mm	1200×380×590	1366×470×758	1770×650×758	1770×650×758
Net weight		kg	58	120	220	220
Packing dimensions	W x H x D	mm	1410×435×695	1620×930×975	2035×1170×975	2035×1170×975
Gross weight		kg	60	145	245	245
Loading Capacity			5HP	10HP	15HP	20HP
Controller			Remote Controller & Wired controller			

Notes: 1. Specifications are based on the following conditions:  
2. Cooling: Indoor temperature 27°C DB/19°C WB, and outdoor temperature 35°C DB/24°C WB.  
3. Heating: Indoor temperature 20°C DB/15°C WB, and outdoor temperature 7°C DB/6°C WB.  
4. Equivalent piping length: 5m; Level difference: 0m; Voltage: 230V.  
5. Sound Level: Indoor unit sound pressure level, measured at a point 1.5m downward from the unit center.  
6. Outdoor unit sound pressure level, measured at a point 1.0m in front of the unit.  
7. Optional simple wired controller; Universal remote controller; auto-restart(optional); Timer: only one circle.  
8. Due to ongoing product development, specifications are subject to change without notice.

## Energy Recovery Ventilation




**Recommended places**  
Cinemas, hotels, lobbies, dance halls, bars and other places

### Technical characteristics




**Healthy Fresh Air**  
Two-way heat exchange technology solves the problem of indoor exhaust air, independent circulation, without any pollution.

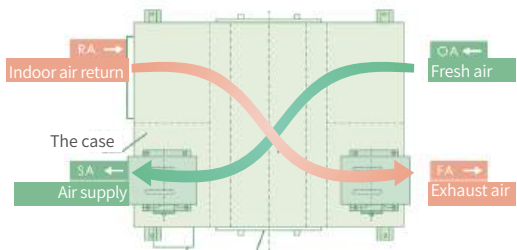

**Big air volume and low energy consumption**  
Using high-efficiency heat exchangers, the energy exchange recovery rate is more than 70%.



**Health**  
The unit is equipped with a professional fresh air filter to ensure that the air is dust-free, and customers can choose a high-efficiency filter.

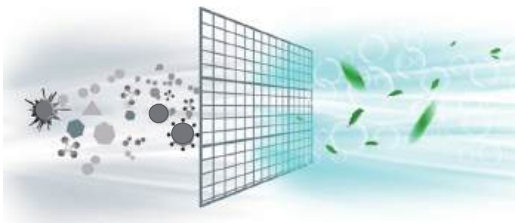

**Easy Maintenance**  
The filter chip can be repaired by opening the access door, which is simple and efficient.

### Specification


Model	Air volume (m³/h)	ESP(Pa)	Power supply	Motor power input		Summer		Winter		Air volume range (m³/h)	Noise dB(A)	Dimension W×D×H(mm)
				input(KW)	Qty.(Pers)	T.E.(%)	E.E.(%)	T.E.(%)	E.E.(%)			
XFQR-2Q-D	200	75	220V ~1N 50Hz	0.05	2	70	60	70	63	150~200	42	850×900×400
XFQR-3Q-D	300	75		0.065	2	70	62	70	65	200~300	42	850×900×400
XFQR-4Q-D	400	75		0.1	2	70	62	70	65	350~400	44	850×900×400
XFQR-5Q-D	500	75		0.12	2	70	62	70	65	450~500	46	850×900×400
XFQR-6Q-D	600	75		0.15	2	70	63	70	67	500~600	46	850×900×400
XFQR-8Q-D	800	80		0.18	2	70	60	70	63	700~800	52	1040×1200×500
XFQR-10Q-D	1000	80	380V ~3N 50Hz	0.18	2	70	60	70	64	900~1000	52	1040×1200×500
XFQR-15Q-D	1500	120		0.25	2	70	62	70	67	1000~1500	55	1200×1200×500
XFQR-20Q-D	2000	220		0.32	2	70	62	70	69	1600~2000	57	1200×1200×500
XFQR-25Q-D	2500	200		0.45	2	70	62	70	67	2100~2500	57	1300×1500×600
XFQR-30Q-D	3000	200		0.55	2	70	61	70	65	2600~3000	57	1400×1600×620
XFQR-40Q-D/S	4000	200		0.8	2	70	62	70	69	3100~4000	58	1600×1700×700
XFQR-50Q-D/S	5000	210		1.1	2	70	61	70	64	4100~5000	60	1600×1700×700
XFQR-60Q-D/S	6000	320		1.8	2	70	60	70	62	5100~6000	61	1700×1400×1600
XFQR-80Q-D/S	8000	500		2.2	2	70	64	70	69	7100~8000	64	2000×1600×1800
XFQR-100Q-D/S	10000	480		3.0	2	70	63	70	69	9100~10000	66	2200×1600×1800
XFQR-120Q-D/S	12000	580		4.0	2	70	64	70	67	11000~12000	68	2500×1600×1900
XFQR-160Q-D/S	16000	500		5.5	2	70	64	70	67	15000~16000	68	2800×1800×2000

Note: The above data is the test value of standard refrigeration condition, and the inlet and outlet air value is 1:1.






## Location Of Refrigerant pipes

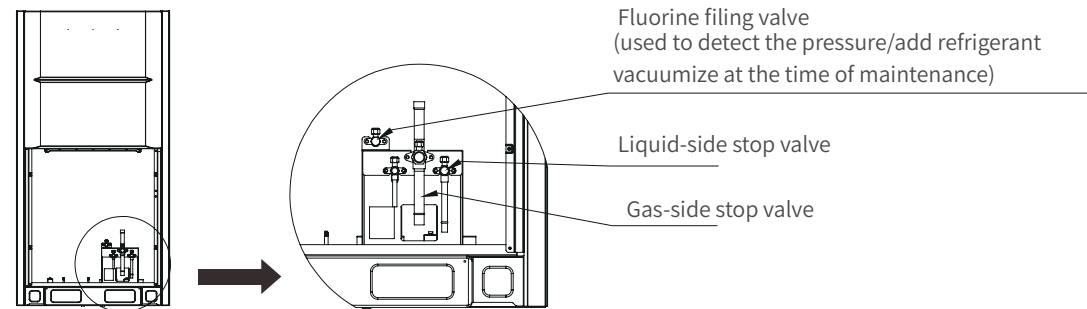


## Installation Space For ODU

- The space shown in the figure needs to be reserved for the installation of the ODU, and the power supply equipment should be installed separately.

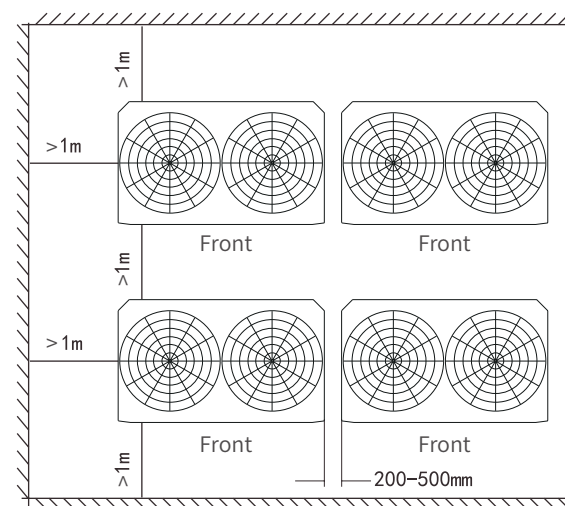


- To ensure the heat dissipation of the outdoor unit, there should be no obstacles above the outdoor unit. If it cannot be avoided, a deflector should be installed.

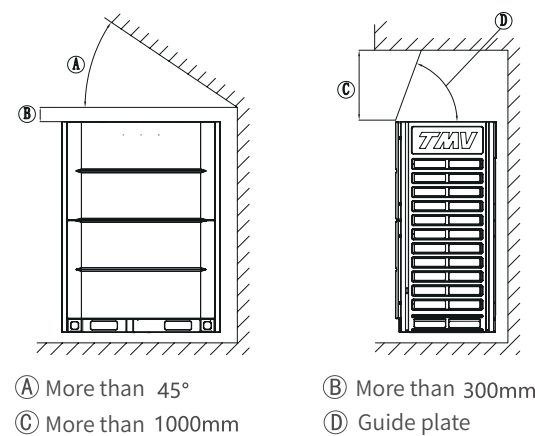


- If there are stacks around the outdoor unit, the height should be less than 800mm from the top of the outdoor unit. If it is less than the size, a mechanical exhaust device must be installed.

## Arrangement Sequence of ODU

- When a system has more than two outdoor units, it is necessary to install the units as the followings: The outdoor units are arranged in descending order (for example, in the right picture, ODU capacity  $A \geq$  ODU capacity  $B \geq$  ODU capacity  $C$ ) and the ODU A should install at the brance pipe.

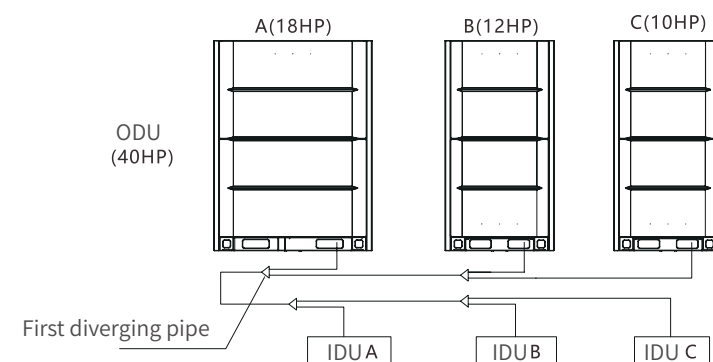


## Dimension of ODU

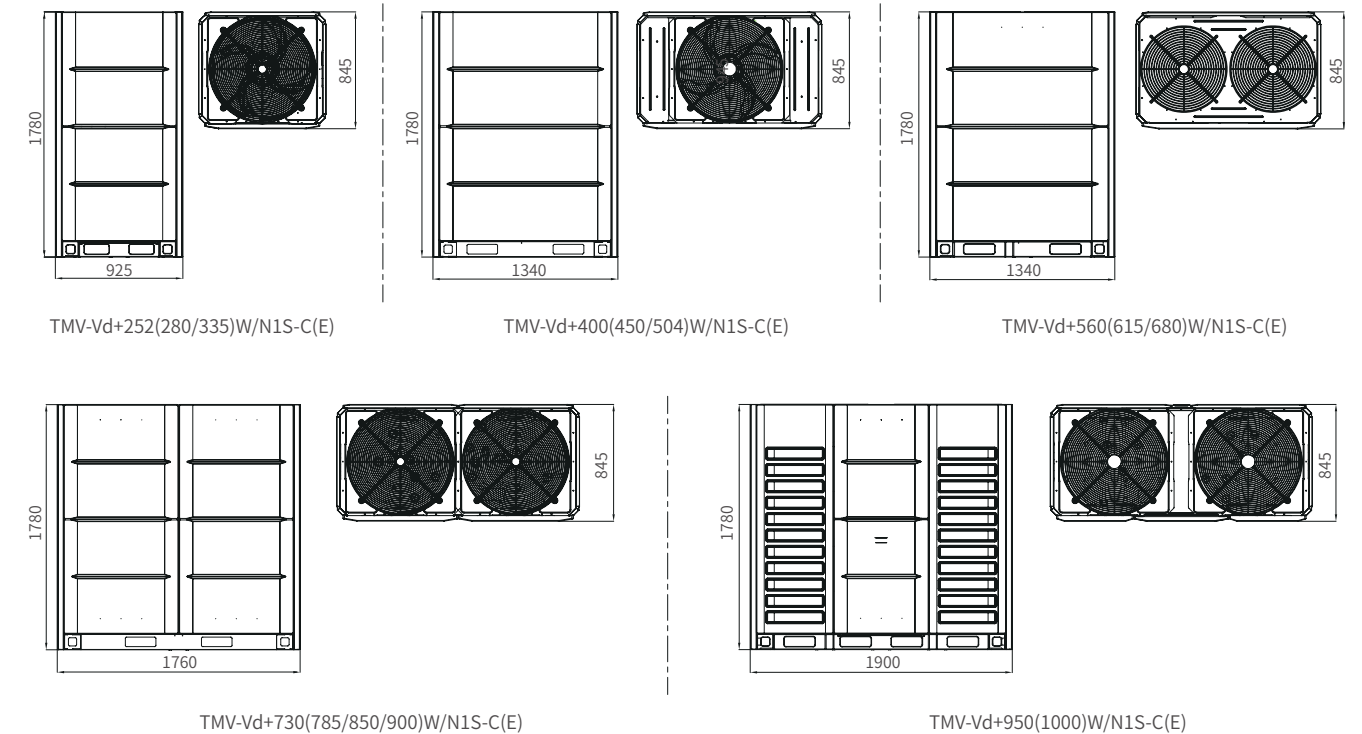

## Requirements for ODU Installation

- A shock absorber or shock pad should be installed between the unit and the foundation.
- The unit and the foundation should be released tightly, otherwise there will be a lot of noise and vibration.
- The outdoor unit must be grounded reliably.
- It is forbidden to open the valves of the liquid pipe, gas pipe and oil balance pipe of the unit before commission.
- The installation should ensure that there is enough space for maintenance.

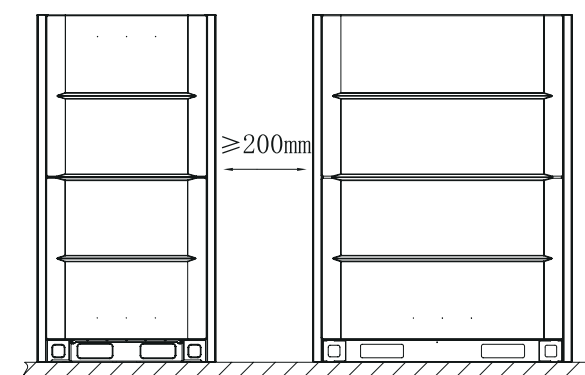

Model	A	B
TMV-Vd+252(280/335)W/N1S-C(E)	724	725
TMV-Vd+400(450/504)W/N1S-C(E)	1141	725
TMV-Vd+560(615/680)W/N1S-C(E)	1141	725
TMV-Vd+730(785/850/900)W/N1S-C(E)	1561	725
TMV-Vd+950(1000)W/N1S-C(E)	1700	725




## Design Of Refrigerant Piping

### Refrigerant pipe length and height

		Admissible value	Pipes
Length of supporting pipe	Total length of Refrigerant pipes (Total extended length)	1100m	$L1+(L2+L3+L4+L5+L6+L7+L8+L9+L10+L11+L12) \times 2 + a+b+c+d+e+f+g+h+i+j+k+l+m$
	Length of the farthest supporting pipe(L)	True length	220m
		Equivalent length	240m
	Length of the supporting pipe furthest from the first branch pipe(L)*	120m	$L7+L8+L9+L10+i$
Height	Height difference between indoor and outdoor units (H)	ODU up	100m
		ODU down	110m
	Height between indoor units (h)		40m

\* Note: Refer to relevant technical documents or consult technical person

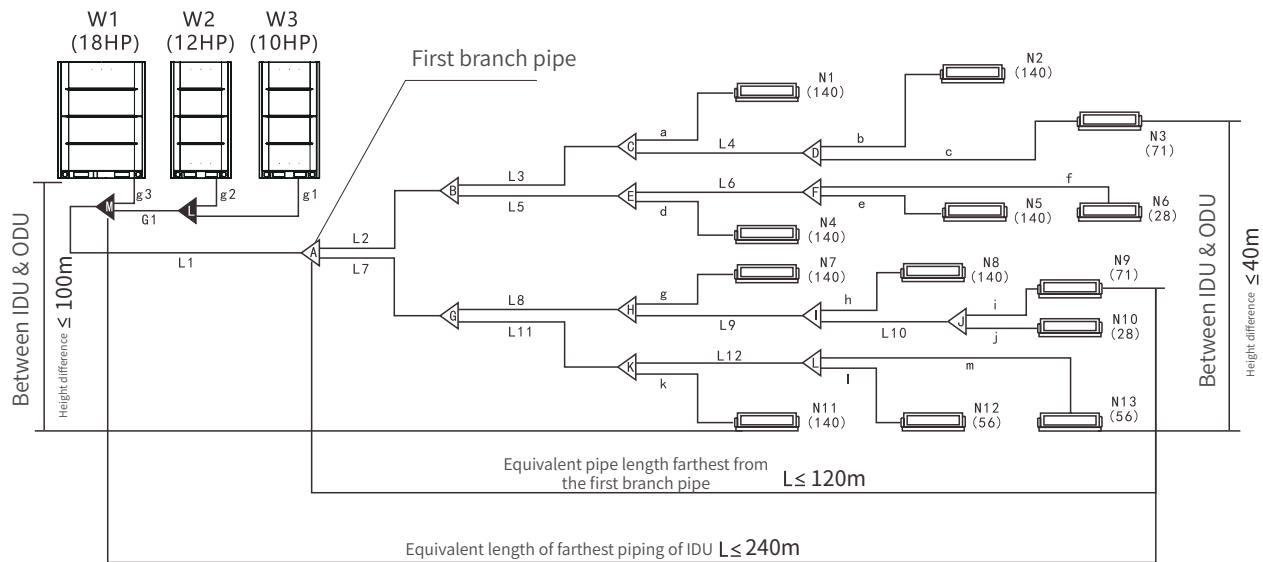


## Branch pipe specifications


Assembly	Include parts	Assembly	Include parts
BY01 Branch pipe parts	G01、L01	BY05 Branch pipe parts	G04、L03
BY02 Branch pipe parts	G02、L01	BY06 Branch pipe parts	L01、L01
BY03 Branch pipe parts	G02、L02	BY07 Branch pipe parts	L01、L02
BY04 Branch pipe parts	G03、L02	BY08 Branch pipe parts	G05、G02

## Branch Pipe Specifications


G01: (φ 25.4-φ 19.1) — 2 × (φ 22.2-φ 6.4)

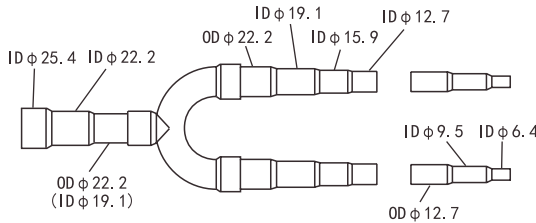


L01: (φ 9.5-φ 12.7) — 2 × (φ 12.7-φ 6.4)

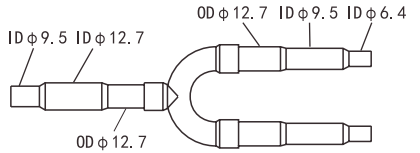


G02: (φ 31.8-φ 25.4) —  
(φ 28.6-φ 19.1) + (φ 28.6-φ 9.5)

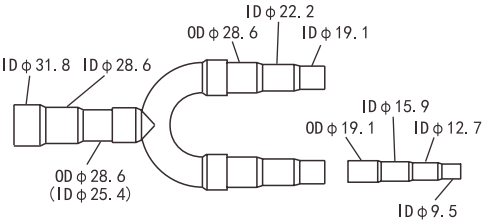


L02: (φ 15.9-φ 19.1) —  
(φ 19.1-φ 12.7) + (φ 19.1-φ 6.4)

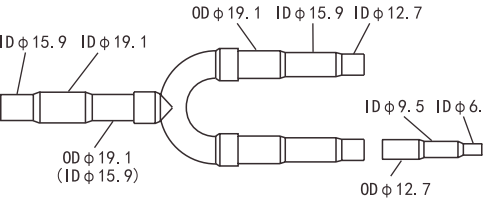


G03: (φ 31.8-φ 38.1) —  
(φ 34.9-φ 25.4) + (φ 38.1-φ 9.5)

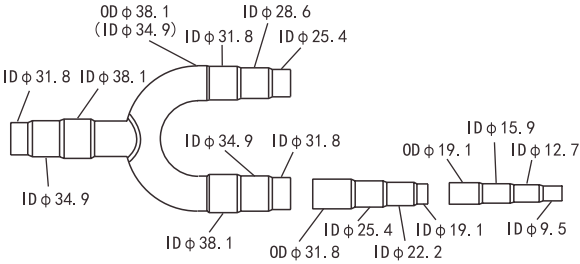


L03: (φ 19.1-φ 25.4) —  
(φ 22.2-φ 12.7) + (φ 22.2-φ 6.4)

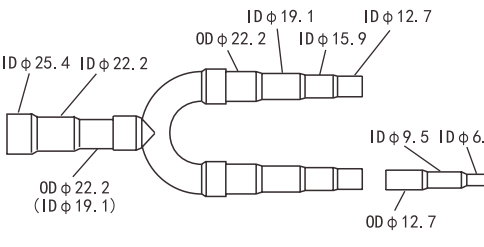

G04: (φ 41.3-φ 44.5) —  
(φ 44.5-φ 34.9) + (φ 41.3-φ 9.5)

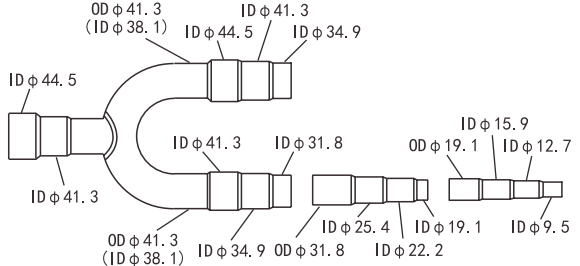

G05: (φ 54-φ 63.5) —  
(φ 41.3-φ 34.9) + (φ 63.5-φ 41.3)

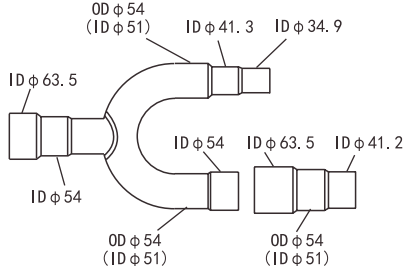






## Piping Classification

- Allowable length and height difference of refrigerant piping

Name of supporting pipe	Connection position of supporting pipe	Assembly
Main pipe	Pipe between the outdoor unit and the first branch	L1
Main pipe of indoor unit	Pipe behind the first indoor branch which do not connect to indoor unit	L2,L3,L4,... L12
Slave pipe of indoor unit	Pipes between the branch and indoor unit	a,b, c, d,... m
Indoor unit branch assembly	Pipes to the master pipe and slave pipes	A, B, C,D,E,F,G,H, I,J,K,L
Outdoor unit branch assembly	Pipes to the outdoor unit and main pipe	L,Mg
Outdoor unit connecting pipe	Pipe between outdoor and outdoor branch	1,g2, g3, g4, G1, G2

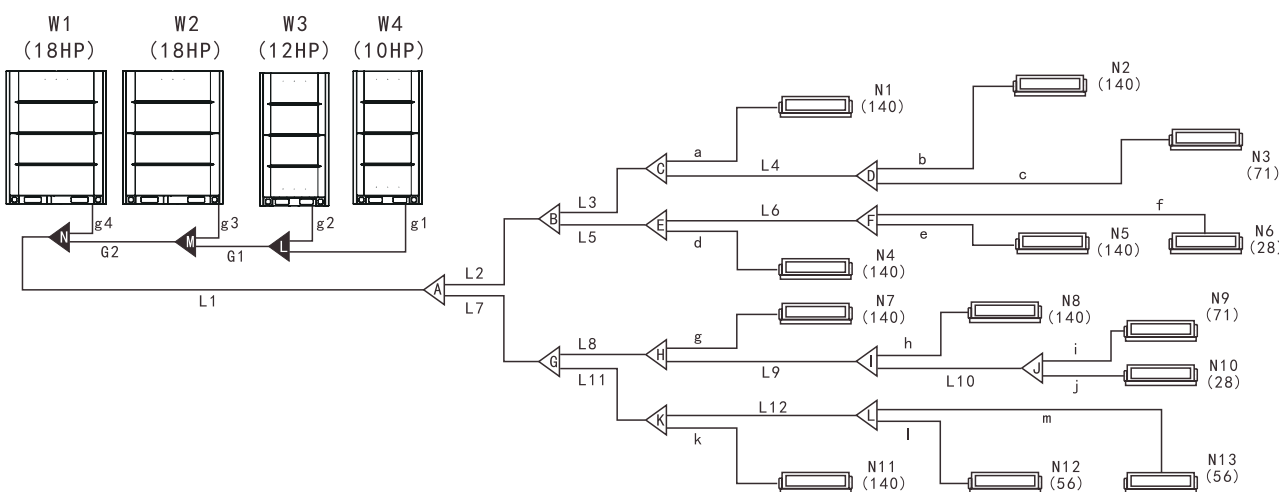

- Pipe dimension of indoor unit(NO.: a,b,c,d,... m)

Indoor Unit Model	Gas side	Liquid side
Capacity: 1800~2200W	φ9.52 (flared nut)	φ6.35 (flared nut)
Capacity: 2800~5600W	φ12.7 (flared nut)	φ6.35 (flared nut)
Capacity: 6300~14000W	φ15.9 (flared nut)	φ9.52 (flared nut)

- IDU main piping and branch pipe assembly(Numbers: L2,L3,L4...L12,A,B,C...L)

Capacity of downstream Indoor unit A(×100w)	Dimension of Master pipe (Gas/Liquid)	Applicable branch pipe (Gas/Liquid)	A(×100w)	Dimension of master pipe (Gas/Liquid)	Applicable branch pipe (Gas/Liquid)
A < 63	φ12.7/φ6.35	BY06(L01/L01)	63 ≤ A < 168	φ15.9/φ9.52	BY07(L02/L01)
168 ≤ A < 224	φ19.1/φ9.5	BY07(L02/L01)	224 ≤ A < 330	φ22.2/φ12.7	BY01(G01/L01)
330 ≤ A < 470	φ25.4/φ12.7	BY01(G01/L01)	470 ≤ A < 710	φ28.6/φ15.9	BY03(G02/L02)
710 ≤ A < 1040	φ31.8/φ19.1	BY03(G02/L02)	1040 ≤ A < 1540	φ38.1/φ19.1	BY04(G03/L02)
1540 ≤ A < 1800	φ41.2/φ22.2	BY05(G04/L02)	1800 ≤ A < 2500	φ44.5/φ25.4	BY05(G04/L03)
2500 ≤ A	φ54.0/φ28.6	BY08(G05/G02)			

## Diameter Of Outer Connecting Pipe

- ODU stop valve port diameter(Numbers: g1,g2,g3,g4)

Model	Gas	Liquid
TMV-Vd+252(280/335/400)W/N1S-C(E)	φ25.4 (welding)	φ12.7 (welding)
TMV-Vd+450(504/560/615/680)W/N1S-C(E)	φ28.6 (welding)	φ15.8 (welding)
TMV-Vd+730(785/850/900)W/N1S-C(E)	φ31.8 (welding)	φ19.1 (welding)
TMV-Vd+950(1000)W/N1S-C(E)	φ34.9 (welding)	φ19.1 (welding)

- ODU Main pipe and branch pipes

Capacity of Outdoor unit	Main equivalent length of all piping less than 90m		Main equivalent pipe length more than 90m	
	Gas pipe/Liquid pipe	First branch of indoor unit (Gas side/liquid side)	Gas pipe/liquide pipe	First branch of indoor unit (Gas side/Liquid side)
8 ~ 12HP	φ25.4/φ12.7	BY01 Prats (G01/L01)	φ28.6/φ12.7	BY02 Prats (G02/L01)
14 ~ 16HP	φ28.6/φ12.7	BY02 Prats (G02/L01)	φ28.6/φ15.9	BY03 Prats (G02/L02)
18 ~ 24HP	φ28.6/φ15.9	BY03 Prats (G02/L02)	φ31.8/φ19.1	BY03 Prats (G02/L02)
26 ~ 32HP	φ31.8/φ19.1	BY03 Prats (G02/L02)	φ34.9/φ19.1	BY04 Prats (G03/L02)
34 ~ 36HP	φ34.9/φ19.1	BY04 Prats (G03/L02)	φ38.1/φ22.2	BY04 Prats (G03/L02)
38 ~ 42HP	φ34.9/φ19.1	BY04 Prats (G03/L02)	φ38.1/φ22.2	BY04 Prats (G03/L02)
44 ~ 48HP	φ38.1/φ19.1	BY04 Prats (G03/L02)	φ41.2/φ22.2	BY05 Prats (G04/L03)
50 ~ 54HP	φ38.1/φ19.1	BY04 Prats (G03/L02)	φ41.2/φ22.2	BY05 Prats (G04/L03)
56 ~ 66HP	φ41.2/φ22.2	BY05 Prats (G04/L03)	φ44.5/φ22.2	BY05 Prats (G04/L03)
68 ~ 72HP	φ41.2/φ22.2	BY05 Prats (G04/L03)	φ44.5/φ25.4	BY05 Prats (G04/L03)
74 ~ 84HP	φ44.5/φ22.2	BY05 Prats (G04/L03)	φ50.8/φ25.4	BY08 Prats (G05/G02)
86 ~ 96HP	φ50.8/φ25.4	BY08 Prats (G05/G02)	φ54.0/φ28.6	BY08 Prats (G05/G02)
98 ~ 108HP	φ54.0/φ28.6	BY08 Prats (G05/G02)	φ63.0/φ28.6	BY08 Prats (G05/G02)

Remark:

- Please select the main pipe diameter of the outdoor unit follow the above table. If the main pipe is larger, choose the main pipe according to larger one.
- If the system is more than 108HP, please consult technical personnel.



## Electrical System And Installation

### Electrical wiring precautions


- Please design the dedicated power supply for IDU and ODU separately.
- The power supply should be equipped with a leakage protector and a manual switch.
- The power supply, leakage protector and manual switch of the IDU connected to the same ODU are required to be universal. (Please use the same circuit for the IDU power supply of the same system. And it must be turned on and off at the same time, otherwise it will seriously affect the service life of the system, and unpredictable situations may occur.)
- Please integrate the IDU and ODU connection wiring system and refrigerant piping system into the same system.
- In order to reduce interference, it is recommended to use two-core shielded cables for the signal cables of the IDU and ODU. Please do not use multi-core cables without shielding.
- During installation, the communication line and the power line must not be intertwined, and must be routed separately, and the minimum distance should be greater than 20CM, otherwise the communication of the unit may be abnormal.
- Power wiring must be entrusted to professional electricians.

### ODU power wiring

Model	Power supply	Minimum wire diameter current (A)	Copper core PVC insulated wire BVV(mm <sup>2</sup> )	Copper core XLPE insulated wire YJV(mm <sup>2</sup> )	Manual switch (A) capacity	Leakage protector
TMV-Vd+252W/N1S-C(E)	380V 3N ~ 50Hz	19.5	4.0X5	4.0X5	32	< 100mA 0.1sec
TMV-Vd+280W/N1S-C(E)	380V 3N ~ 50Hz	21.6	4.0X5	4.0X5	32	
TMV-Vd+335W/N1S-C(E)	380V 3N ~ 50Hz	24.9	6.0X5	4.0X5	32	
TMV-Vd+400W/N1S-C(E)	380V 3N ~ 50Hz	26.5	6.0X5	4.0X5	32	
TMV-Vd+450W/N1S-C(E)	380V 3N ~ 50Hz	32.2	10.0X5	6.0X5	40	
TMV-Vd+504W/N1S-C(E)	380V 3N ~ 50Hz	34.0	10.0X5	6.0X5	40	
TMV-Vd+560W/N1S-C(E)	380V 3N ~ 50Hz	41.8	16.0X5	10.0X5	50	
TMV-Vd+615W/N1S-C(E)	380V 3N ~ 50Hz	42.9	16.0X5	10.0X5	50	
TMV-Vd+680W/N1S-C(E)	380V 3N ~ 50Hz	45.5	16.0X5	10.0X5	50	
TMV-Vd+730W/N1S-C(E)	380V 3N ~ 50Hz	46.0	16.0X5	10.0X5	50	
TMV-Vd+785W/N1S-C(E)	380V 3N ~ 50Hz	48.0	16.0X5	10.0X5	50	
TMV-Vd+850W/N1S-C(E)	380V 3N ~ 50Hz	56.8	25.0X3+16.0X2	16.0X5	63	
TMV-Vd+900W/N1S-C(E)	380V 3N ~ 50Hz	57.0	25.0X3+16.0X2	16.0X5	63	
TMV-Vd+950W/N1S-C(E)	380V 3N ~ 50Hz	63.8	25.0X3+16.0X2	16.0X5	80	
TMV-Vd+1000W/N1S-C(E)	380V 3N ~ 50Hz	64.0	25.0X3+16.0X2	16.0X5	80	

Remark : 1.The wire diameter and continuous length in the table are applicable to a maximum distance of 20 meters. If the power wiring exceeds 20 meters and the voltage drop exceeds the range of 2%, please choose a wire diameter with a larger cross-sectional area.  
2.The selection of the power cord is based on the ambient temperature of 40° C.  
3.The wire current carrying capacity in the attached table is only for the user's reference. The actual interception capacity of the wire varies depending on the type and length of the cable, the way of pipe penetration, and the actual laying environment, and the correction factor is different.


### ODU power connection

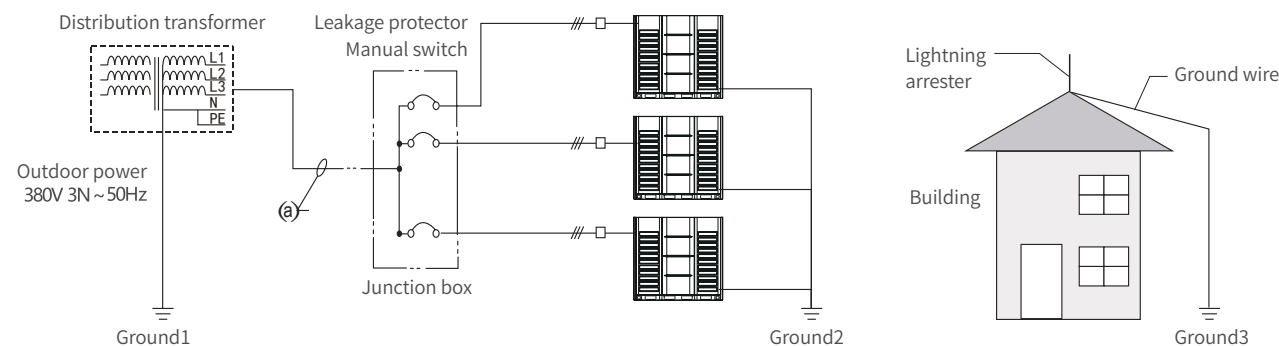

### IDU power wiring

Model	Power supply	Minimum wire diameter(mm <sup>2</sup> )			Manual switch		Leakage protector
		Dimensions (Continuous Length)	Dimensions (Continuous Length)	Ground wire	Capacity	Fuse	
All IDU Model	90-140Q8 125-140F2 125-140F5	2.5 (30m)	4.0 (50m)	φ1.6mm	30	15	20A、 30mA < 0.1sec
	Other model						

Remarks: The wiring diameter and continuous length in the table indicate that the voltage drop is within 2%. When the continuous wiring length exceeds the value in the table, please follow the relevant regulations to select the wire diameter.

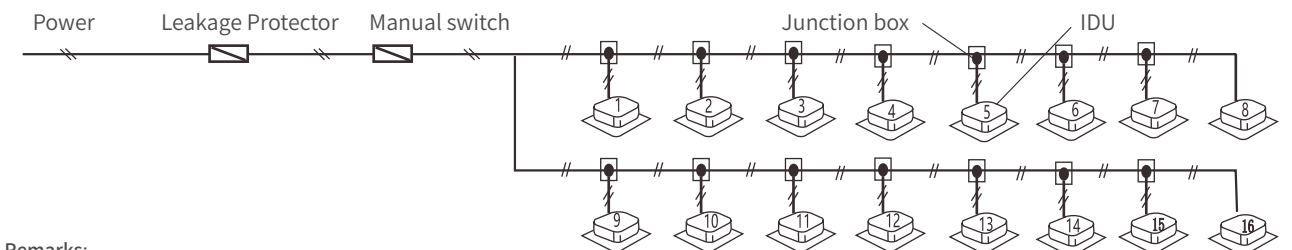

Remarks:

1. Please use the refrigerant piping system, the indoor unit-indoor unit room, and the indoor unit-outdoor unit connection signal line as the same system.
2. All the internal units in the same system must be powered in a unified manner, and some internal units cannot be cut off, otherwise the unit will fail.
3. When the power cable and the signal cable are parallel, please put the wires into their respective wire ducts, and leave a suitable distance between the wires. (Distance between power cables: 300mm below 10A, 500mm below 50A)
4. When multiple outdoor units are connected in parallel, the main outdoor unit must be set. (Refer to the settings of the DIP switch)


### Control system and installation

- Signal lines must be shielded. Using other wires may cause signal interference and cause malfunction.
- The shielding nets of all shielded wires are connected to each other and finally connected to the sheet metal ground at one point.
- It is forbidden to bundle signal wires, refrigerant pipes, power wires, etc. together. When the power line and the signal line are laid in parallel, they should be kept at a distance of more than 300mm to prevent the signal source from being disturbed.
- Signal lines cannot form a closed loop.
- The signal line has no polarity, and there is no need to distinguish it when wiring.v

### IDU and ODU signal line wiring

- Please use two-core shielded wire (  $\geq 0.75\text{mm}^2$  ) for the signal cable of indoor and outdoor units, without polarity. The signal cable of indoor and outdoor units should be connected as far as possible from the end of the outdoor unit.

ODU(Host) ODU(Slave1) ODU(Slave2) ODU(Slave3)

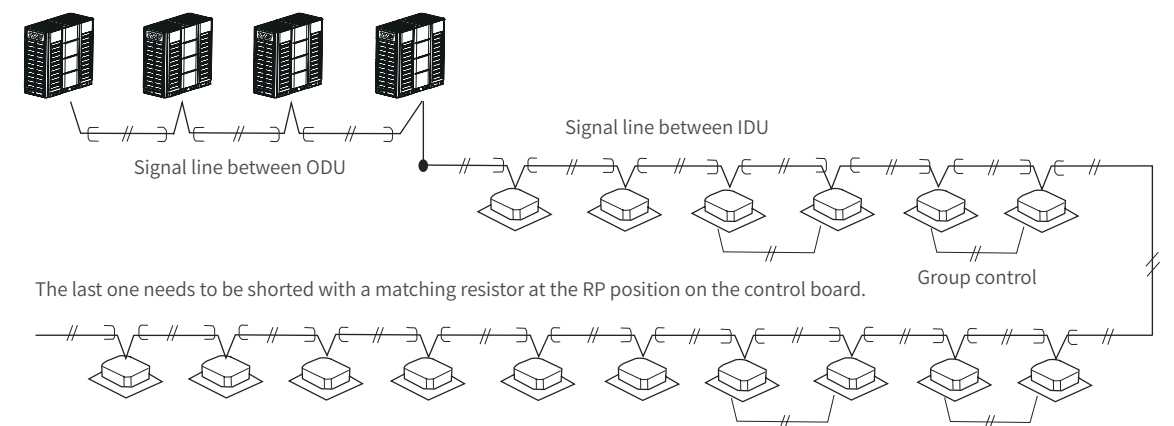



## "The Growing of the Great Brand" strategy and craftsman spirit To create high-quality professional projects

TCL CAC insists on frequency conversion and energy saving technology, cooperates with top enterprises in the industry, independent innovation and technological change. TCL VRF is widely used in public places such as residences, factories, shops, etc. The sample projects are all over the world, creating an energy-saving, comfortable and healthy living environment for users.

### Government



Customs Inspection Centre



National tax building



Archives center

### Business



Vietnam Industrial Park



India Office Building



Uzbekistan electronic factory

### Education



Tianjin Nankai High School



Southern University of Science and Technology



National University of Defense Technology

### Public utilities



Olympic Game Stadium



Shanghai World Expo



Asia Game Stadium

### Real estate



Cambodia JINXIN International Casino



Cambodia Country hotel




Changchun Wanda Plaza

### Transportation



Kunshan South Railway Station

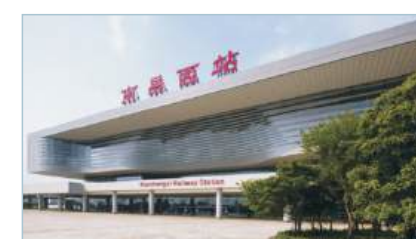

Nanchang West Railway Station



LangZhong Railway Station

### Hospital



The Third People's Hospital of Shenzhen



Shenzhen Guangming Hospital



The First Hospital of Jiaxin

# Certificates



ISO 9001:2015  
ISO 14001:2015  
ISO 45001:2018  
ISO 50001:2018  
ISO/IEC 27001:2022  
IECQ QC 080000:2017

---

# TCL

GD TCL INTELLIGENT HEATING & VENTILATING EQUIPMENT CO.,LTD.  
Address: No.7 Yuanlin Road, Nantou, Zhongshan, Guangdong, PR China  
Web : [cac.tcl.com](http://cac.tcl.com) E- mail : [hvac@tcl.com](mailto:hvac@tcl.com)

V24.10.14



TCL CAC



TCL CAC Global



TCL CAC



HVAC-TCL



TCL- CAC